

Appendix 2

Photos of the crane lorries will be accommodated at the application site






Appendix 2



250mm MINIMUM UNCOURSED
RANDOM RUBBLE MASONRY
BEDDED AND JOINTED IN 1:2 CEMENT
MORTAR WHERE DIRECTED BY THE ENGINEER

CONCRETE COVER

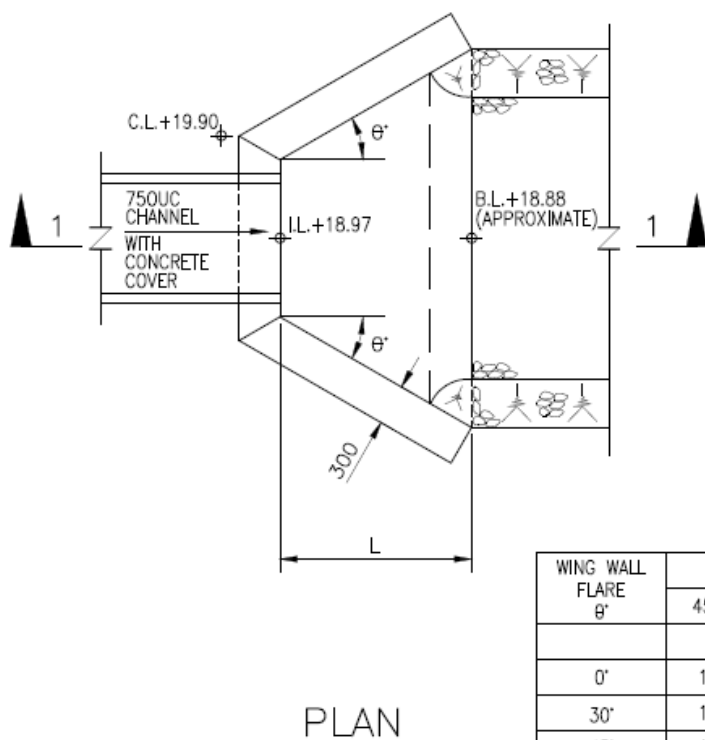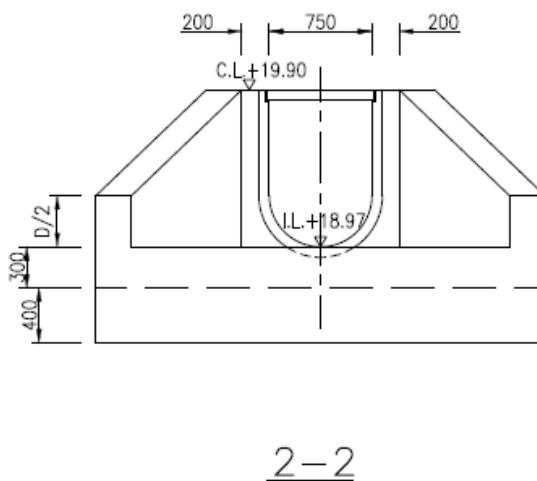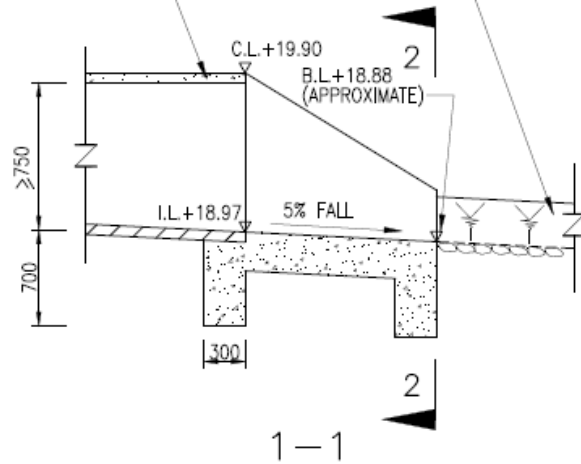

NOTES :

1. CONCRETE : GRADE 30D/20

WING WALL FLARE θ°	DIAMETER OF CHANNEL H			
	450-750	900-1200	1350-1650	1800-1950
	L			
0°	1800	2400	3000	3600
30°	1400	1800	2300	2700
45°	1200	1500	1900	2300

TITLE

DETAILS OF OUTFALL

何田顧問工程師有限公司
HO TIN & ASSOCIATES
CONSULTING ENGINEERS LIMITED

SCALE

N. T. S.

DRAWING No.

FIGURE 4