# Proposed Temporary Animal Boarding Establishment (Dog Kennel) & Associated Filling of Land for a Period of 3 Years

at

Lots 1678 (Part), 1679 (Part) & 1682 (Part) in D.D. 119, Yuen Long, New Territories

#### **Annex 1 Drainage Proposal**

#### 1.1 **Existing Situation**

- A. Site particulars
- 1.1.1 The application site occupies an area of about 1,680m<sup>2</sup>.
- 1.1.2 The site is serviced by a vehicular access leading from Kiu Hing Road. The area adjacent to the proposed development is mainly rural in nature.
- B. Level and gradient of the subject site & proposed surface channel
- 1.1.3 It has a gradient sloping from southwest to northeast from about +10.7mPD to +10.5mPD. (**Figure 4**)
- C. Catchment area of the proposed drainage provision at the subject site
- 1.1.4 The land to the north, west and east is found about the same or lower in level than the application site. As such, no external catchment is identified.
- D. Particulars of the existing drainage facilities to accept the surface runoff collected at the application site
- 1.1.5 As shown in **Figure 4**, an open drain is found to the northeast of the application site. The stormwater intercepted by the proposed surface channel at the application site will be dissipated to the said open drain

## 1.2 Runoff Estimation

1.2.1 Rational method is adopted for estimating the designed run-off

$$Q = k \times i \times A/3,600$$

Assuming that:

- i. The area of the catchment is approximately 1,680m<sup>2</sup>; (**Figure 4**)
- ii. The application site will be fully paved. It is assumed that the value of run-off co-efficient (k) is taken as 1.

Difference in Land Datum = 
$$10.7m - 10.5m = 0.2m$$
  
L =  $51m$   
 $\therefore$  Average fall =  $0.2m$  in  $51m$  or  $1m$  in  $255m$ 

According to the Brandsby-Williams Equation adopted from the "Stormwater Drainage Manual – Planning, Design and Management" published by the Drainage Services Department (DSD),

Time of Concentration (t<sub>c</sub>) 
$$= 0.14465 \ [ \ L/(H^{0.2} \times A^{0.1}) \ ]$$
 
$$t_c = 0.14465 \ [ 51/\ 0.39^{0.2} \times 1,680^{0.1}) \ ]$$
 
$$t_c = 4.23 \ minutes$$

With reference to the Intensity-Duration-Frequency Curves provided in the abovementioned manual, the mean rainfall intensity (i) for 1 in 50 recurrent flooding period is found to be 295 mm/hr

By Rational Method,

Q<sub>1</sub> = 1 × 295 × 1,680 / 3,600  

$$\therefore$$
 Q<sub>1</sub> = 137.67 l/s = 8,260 l/min = 0.14m<sup>3</sup>/s

In accordance with the Chart or the Rapid Design of Channels in "Geotechnical Manual for Slopes", for an approximate gradient of about 1:200 in order to follow the gradient of the application site, 375mm surface U-channel along the site periphery is considered adequate to dissipate all the stormwater accrued by the application site.

## 1.3 Proposed Drainage Facilities

- 1.3.1 Subject to the calculations in 1.2 above, it is determined that proposed 375mm concrete surface channel along the site periphery is adequate to intercept storm water passing through and generated at the application site (**Figure 4**).
- 1.3.2 The collected stormwater will then be discharged directly to the open drain to the northeast of the application site as shown in **Figure 4**. The discharge path is shown in **Figure 4**.
- 1.3.3 All the proposed drainage facilities will be provided and maintained at the applicant's own expense. Also, sand trap and surface channel will be cleaned at regular interval to avoid the accumulation of rubbish/debris which would affect the dissipation of storm water.
- 1.3.4 The provision of the proposed surface channel will follow the gradient of the application site. All the proposed drainage facilities will be constructed and maintained at the expense of the applicant.
- 1.3.5 Prior to the commencement of the drainage works, the applicant will seek consent from District Lands Office/Yuen Long and relevant land owners for the provision of drainage facilities outside the application site.
- 1.3.6 The proposed development would not affect the existing ditches, drains and obstruct the flow of the flow of surface runoff.
- 1.3.7 The provision of surface channel at site boundary is detailed hereunder:
- (a) Soil excavation at site periphery, is inevitably for the provision of surface channel. The accumulation of excavated soil at the site periphery would obstruct the free flow of the surface runoff from the surroundings. Hence, the soil will be cleared at the soonest possible after the completion of the excavation process.
- (b) In view of that soil excavation may be continued for several working days, surface channel will be dug in short sections and all soil excavated will be cleared before the excavation of another short section.
- (c) No leveling work will be carried at the site periphery. The level of the site periphery will be maintained during and after the works. The works at the site periphery would not either alter the flow of surface runoff from adjacent areas.
- (d) 100mm gap will be provided at the toe of site hoarding to allow unobstructed flow of surface runoff.


#### **Annex 2** Estimated Traffic Generation


- 2.1 The application site is serviced by a vehicular access leading from Kiu Hing Road. Having mentioned that the site is intended for dog kennel, traffic generated by the proposed development is not significant.
- 2.2 The proposed parking spaces at the application site would only be opened to applicant and visitors.
- 2.3 There will be 6 parking spaces of 5m x 2.5m for private car. The estimated traffic generation/attraction rate is shown below:

Type of	Average Traffic	<u>Average</u>	Traffic	Traffic
Vehicle	Generation Rate	Traffic	Generation Rate	Attraction Rate
	(pcu/hr)	Attraction Rate	at Peak Hours	at Peak Hours
		(pcu/hr)	(pcu/hr)	(pcu/hr)
Private car	0.67	0.67	2	1

#### Note:


- 1. The operation hours of the proposed development is from 9:00a.m. to 6:00p.m. from Mondays to Sundays and public holidays. After office hours, some dogs will stay at the application site and 2 staff will station at the site to look after the dogs stayed at the application site and no visitors will allowed to visit the site after operation hours;
- 2. The pcu of private car are taken as 1; &
- 3. Morning peak is defined as 7:00a.m. to 9:00a.m. whereas afternoon peak is defined as 5:00p.m. to 7:00p.m.
- 2.5 In association with the intended purpose, adequate space for manoeuvring would be provided within the application site. Sufficient space within the application site is provided so that no queueing up of vehicle would be occurred outside the application site.

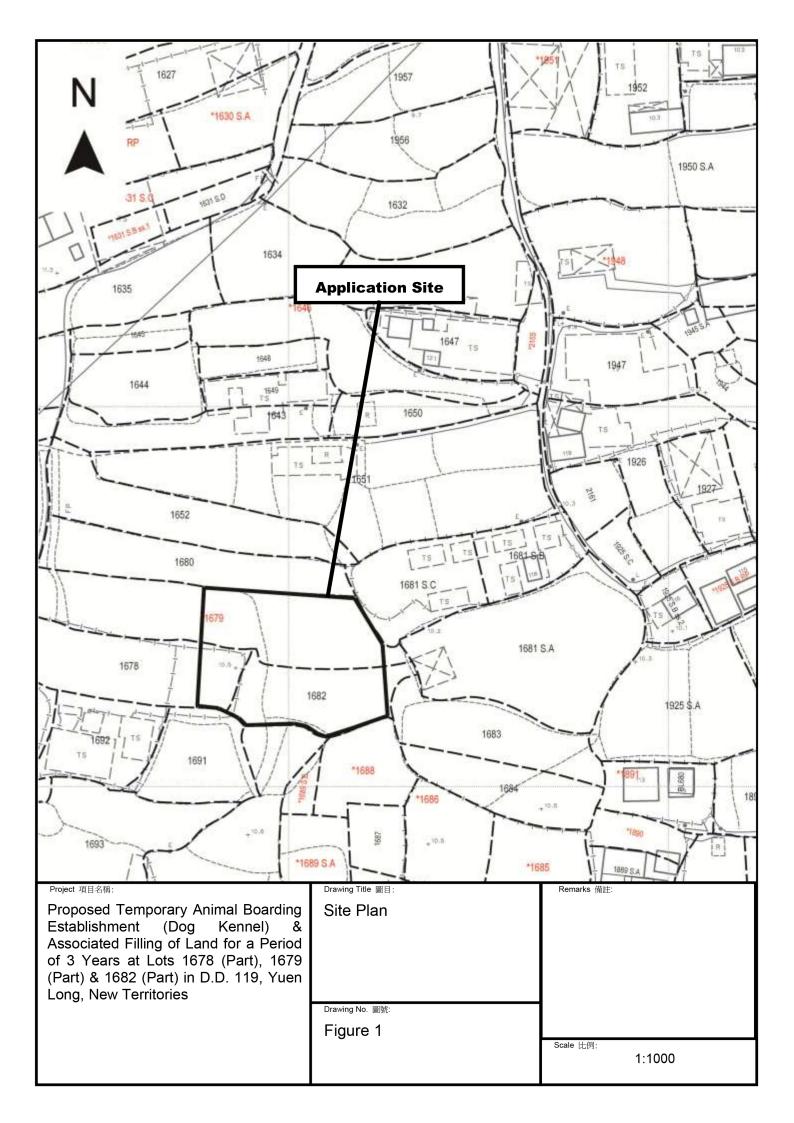

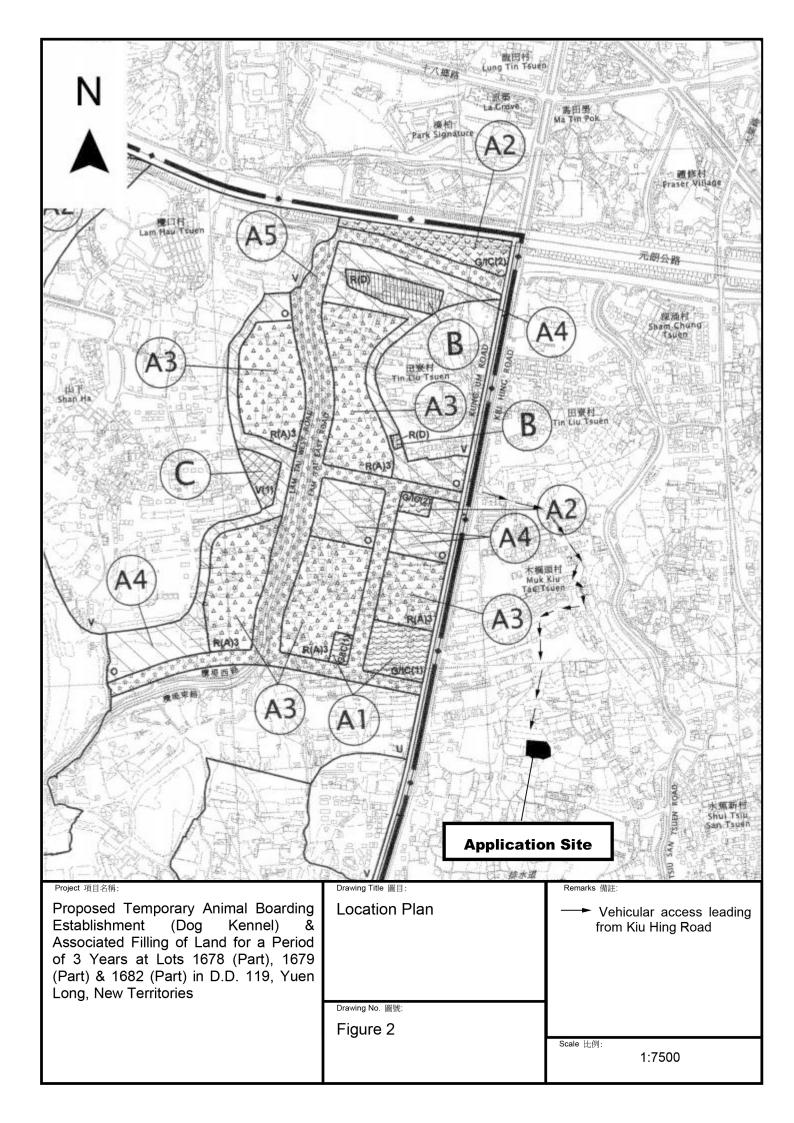





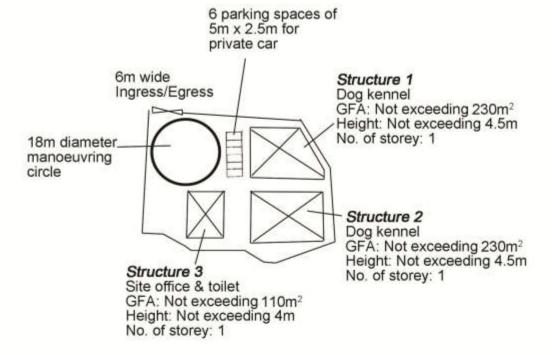

Proposed Temporary Animal Boarding Establishment (Dog Kennel) & Associated Filling of Land for a Period of 3 Years at Lots 1678 (Part), 1679 (Part) & 1682 (Part) in D.D. 119, Yuen Long, New Territories

Drawing No. 圖號:
Figure 3

Scale 比例:

Remarks 備註:

Drawing Title 圖目:

