



DRAINAGE IMPACT ASSESSMENT

To Amend the Notes of the “Comprehensive Development to include Wetland Restoration Area” Zone for a Proposed Comprehensive Development at Wo Shang Wai, Yuen Long, Lots 77 and 50 S.A in DD101

**(REVISION 3)
DATE: SEPTEMBER 2025**

WSP (ASIA) LTD.
7/F ONE KOWLOON
1 WANG YUEN STREET
KOWLOON BAY, HONG KONG


PHONE: +852 2579-8899
FAX: +852 2856-9902
WSP.COM

Quality Management

| Issue/revision | 0 | 1 | 2 | 3 |
|----------------|-------------------|-------------------|-------------------|------------------------|
| Remarks | | | | |
| Date | 08 Aug. 2024 | 20 Jan. 2025 | 20 April 22, 2025 | 4 September 2025 |
| Prepared by | Jinxuan Xu | Jinxuan Xu | Jinxuan Xu | Jinxuan Xu |
| Signature | <i>Jinxuan Xu</i> | <i>Jinxuan Xu</i> | <i>Jinxuan Xu</i> | <i>Jinxuan Xu</i> |
| Checked by | Connie Chan | Connie Chan | Connie Chan | Yuen, Desmond Chun-Wai |
| Signature | | | | |
| Authorised by | Kau, Paul | Kau, Paul | Kau, Paul | Kau, Paul |
| Signature | | | | |
| Project number | | | | |
| Report number | 0 | 1 | 2 | 3 |

Signatures

Prepared by



Jinxuan Xu
Assistant Consultant

Reviewed by

Yuen, Desmond Chun-Wai
Associate

This report was prepared by WSP (Asia) Ltd. (WSP) for the account of Profit Point Enterprises Ltd, in accordance with the professional services agreement. The disclosure of any information contained in this report is the sole responsibility of the intended recipient. The material in it reflects WSP's best judgement in light of the information available to it at the time of preparation. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. WSP accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This limitations statement is considered part of this report.

The original of the technology-based document sent herewith has been authenticated and will be retained by WSP for a minimum of ten years. Since the file transmitted is now out of WSP's control and its integrity can no longer be ensured, no guarantee may be given to by any modifications to be made to this document.

CONTENTS

| | | |
|-----------|---|-----------|
| 1 | INTRODUCTION..... | 1 |
| 2 | OBJECTIVES OF THIS DRAINAGE IMPACT ASSESSMENT REPORT | 3 |
| 3 | EXISTING DRAINAGE CHARACTERISTICS | 4 |
| 4 | POTENTIAL ADVERSE DRAINAGE IMPACTS..... | 6 |
| 5 | METHODOLOGY FOR ASSESSMENT | 7 |
| 6 | DESIGN ASSUMPTIONS AND PARAMETERS..... | 11 |
| 7 | PROPOSED CHANGES TO THE DRAINAGE CHARACTERISTICS..... | 12 |
| 8 | PROPOSED DRAINAGE ARRANGEMENT AND MITIGATION MEASURES..... | 16 |
| 9 | ASSESSMENT ON DRAINAGE IMPACT | 19 |
| 10 | TEMPORARY DRAINAGE ARRANGEMENT | 22 |
| 11 | MAINTENANCE RESPONSIBILITIES | 23 |
| 12 | SUMMARY AND CONCLUSIONS | 24 |

LIST OF TABLES

| | |
|---|----|
| Table 1-1 Key Data for the Application Site..... | 2 |
| Table 5-1 Design Tide level at Tsim Bei Tsui..... | 9 |
| Table 5-2 Summary of Assessment Scenarios..... | 10 |
| Table 6-1 Surface's Roughness Coefficient..... | 11 |
| Table 7-1 CN Values of Pre & Post Developments for the Application Site..... | 12 |
| Table 7-2 CN Values Applied for the Pre-Development Model..... | 14 |
| Table 7-3 CN Values Applied for the Post-Development Model..... | 14 |
| Table 8-1 Key Dimensions of Wetland Restoration Area..... | 17 |
| Table 9-1 Change in Peak Discharge from the Application Site..... | 19 |
| Table 9-2 Change in Total Runoff from the Application Site..... | 19 |
| Table 9-3 Change in Water Level along Mai Po River and Mai Po Tributary under 50yr ARI..... | 19 |

1 INTRODUCTION

1.1 BACKGROUND AND PREVIOUS APPROVED DIAS

1.1.1 WSP (Asia) Limited (hereinafter “WSP”) was commissioned by Profit Point Enterprises Limited to carry out a Drainage Impact Assessment (DIA) for the proposed Comprehensive Residential Development at Wo Shang Wai, Yuen Long.

1.1.2 This application is made under section 12A of the Town Planning Ordinance, to rezone the Application Site on the draft Mai Po and Fairview Park Outline Zoning Plan (“OZP”) No. S/YL-MP/8. The rezoning application aims to increase the plot ratio (“PR”) from 0.4 (i.e. maximum permissible PR on the OZP) to 1.3, with a maximum building height (“BH”) adjusted to not more than 10-storeys and not exceeding +42mPD by amending the Notes of the current “Other Specified Uses (Comprehensive Development to include Wetland Restoration Area)” (“OU(CDWRA)”) zone.

1.1.3 The Applicant, Profit Point Enterprises Limited, proposes to increase the development intensity, and revise the layout and form of the housing developments in the Application Site, in response to the drastic changes in the development site context and planning circumstances of the area.

1.1.4 The Application Site is located at Wo Shang Wai, Yuen Long. It is generally bounded by Castle Peak Road – Mai Po and San Tin Highway to the east, fishponds to the north, residential developments, namely Royal Palms and Palm Springs to the south, and Wo Shang Wai Village to the southeast, as shown in **Figure 1**.

1.1.5 Under the approval condition (d) of the approved Section 16 Planning Application (Planning Application No. A/YL-MP/229) for proposed comprehensive development at Wo Shang Wai, DIAs were considered to have satisfactorily discharged the condition requirement in Town Planning Board’s letters dated 13 March 2015, 12 May 2021 and 1 March 2024 (**Appendix A**).

1.1.6 The proposed comprehensive residential development comprises a revised mixture of residential buildings and ancillary residential facilities including swimming pools, car parks, club house and landscaped open spaces. The total site area is approximately 20.74ha. The revised MLP of the development is shown in **Appendix B**.

1.1.7 According to the latest MLP, the key data for the proposed development on the Application Site is summarized in **Table 1-1** below.

Table 1-1 Key Data for the Application Site

| | |
|---|-----------------------------------|
| 1. Site Data | |
| Application Site Area | 207,408 m ² (approx..) |
| Paved Area plus Pool Area (53.6%) [incl. Residential Houses, Club House & Roads] | 111,292 m ² |
| As-Built Restored Wetland (22.9%) | 47,400 m ² |
| Vegetated Area +(23.5%) [incl. Amenity Planting & Garden] | 48,716 m ² |
| 2. Residential Development | |
| Domestic Plot Ratio | 1.28 |
| Domestic GFA | 266,079 m ² |

2 OBJECTIVES OF THIS DRAINAGE IMPACT ASSESSMENT REPORT

2.1.1 The purpose of this DIA is to review the previous approved DIAs with respect to the revised MLP and the previous agreed drainage mitigation measures. This DIA also includes the followings:

- a) Review the existing drainage condition and flooding susceptibility of the Application Site, which is a requirement introduced subsequent to the previous approval.
- b) Outline the methodology for the assessment.
 - Susceptibility to flooding of neighbouring areas of the Application Site;
 - Exacerbation to existing flooding issue during the construction period;
 - Exacerbation to existing flooding issue upon completion of the development; and
 - Effect on existing drainage conditions.
- c) Outline changes to the drainage characteristics and potential drainage impacts in the following aspects.
- d) Propose drainage impact mitigation measures, if necessary, to mitigate the potential drainage impact due to the revision of the MLP.
- e) Discuss the responsibility of the maintenance aspects of the proposed drainage system and drainage impact mitigation measures.

3 EXISTING DRAINAGE CHARACTERISTICS

3.1 EXISTING DRAINAGE CONDITION WITHIN THE APPLICATION SITE

3.1.1 The Application Site is located at two drainage basins, namely San Tin Basin and Ngau Tam Mei Basin as shown in **Figure 2**. However, as concluded in the previous approved DIAs, the runoff generated from the Application Site is discharged merely to San Tin Basin through a ditch along the Application Site's perimeter and thus no runoff is discharged to Ngau Tam Mei Basin. In this regard, the drainage impact to Ngau Tam Mei Basin will not be assessed.

3.1.2 The runoff from the western periphery of the Application Site is collected in a depression with lower elevation before being discharged into a tributary of the Mai Po River (thereafter named as the Mai Po Tributary) via a pipe. According to topographic data, the Mai Po Tributary is trapezoidal in shape with average dimensions of 2m deep by 10m base width. Mai Po Tributary joins Mai Po River at its downstream end. Mai Po River further merges with Shenzhen River and then discharges into Deep Bay.

3.1.3 No formal drainage system exists for runoff generated from the eastern portion of the Application Site. The runoff either infiltrates into the ground or discharges directly into the Mai Po Tributary. In addition to the site runoff, three 1350mm dia. pipes in the eastern portion of the Application Site serve conveying runoff from the vacant lots between Castle Peak Road and Royal Palms as shown in **Figure 3**.

3.1.4 San Tin basin is characterized by flat agricultural land with a large amount of fishponds at the downstream portion with some village developments along San Tin Highway. Hilly vegetated areas exist on the upland in the basin. The existing drainage features and the overland flow path within the Application Site are shown in **Figure 3**.

3.2 EXISTING FLOW PATH THROUGH THE APPLICATION SITE – WO SHANG WAI VILLAGE

3.2.1 To the south of the Application Site is Wo Shang Wai Village (i.e. sub-catchment MP02A-a4 as shown in **Figure 4**). Wo Shang Wai Village is a low-lying area with ground level ranges from 2.4mPD to 2.8mPD. It is surrounded by Royal Palms, Palm Springs and the Application Site. According to drainage record plans and building record plans, runoff from Royal Palms and Palm Springs are intercepted and discharged to Ngau Tam Mei Basin. Runoff from the surroundings developments will not drain into Wo Shang Wai Village therefore it is independent from the surrounding developments.

3.2.2 As shown in **Appendix C**, the drainage system in Wo Shang Wai utilizes an existing flood storage pond and an associated pumping system. The system lifts stormwater through two 200mm dia. rising mains and discharges it into four 400mm dia. aboveground pipes that

extend eastward along the boundary of the Application Site. Subsequently, these pipes merge into two 200mm dia. underground pipes in the eastern portion of the Application Site, directing flow northward before final discharge into the Mai Po Tributary.

3.3 EXISTING FLOW PATH THROUGH THE APPLICATION SITE – VACANT LOTS BETWEEN CASTLE PEAK RD & ROYAL PALMS

3.3.1 The stormwater from the vacant lots between Castle Peak Road and Royal Palms is drained to the Mai Po Tributary via 3 x 1350mm dia. pipes through Application Site while runoff from the northern portion of Royal Palms is discharged to Ngau Tam Mei Basin. The runoff from the said vacant lots eventually discharges into Mai Po Tributary via the eastern ditch across the Application Site. The inlet of 3 x 1350mm dia. pipes through the Application Site can be seen on the south boundary of the Application Site's eastern portion, as shown in **Appendix C**.

3.4 EXISTING FLOW PATH THROUGH THE APPLICATION SITE – NORTH-EASTERN SIDE OF THE APPLICATION SITE

3.4.1 The runoff from the northeastern areas to the Application Site (i.e., sub-catchments MP02A-a7 and MP02A-a8 as shown in **Figure 4**) dips northward to the Mai Po Tributary.

3.5 FLOODING BLACKSPOTS AROUND THE APPLICATION SITE

3.5.1 According to the Drainage Services Department (DSD) – Location of DSD Flooding Blackspots in **Appendix D**, no flooding blackspots exists in the sub-catchment of the Mai Po River for which the Application Site is located in. The nearest flooding blackspot in the same basin as the proposed development is at Shek Wu Wai (ID No.1) of San Tin which was recorded to be a medium¹ flooding blackspot. Moreover, this village is located within the “San Tin Western Drainage Channel” catchment, which is independent from Mai Po Tributary and Mai Po River, therefore it will not be discussed in this DIA.

¹ Definition of Medium as per DSD - affecting area of more than 10 hectares or resulting in significant property damage or serious traffic disruption

4 POTENTIAL ADVERSE DRAINAGE IMPACTS

4.1.1 The potential adverse drainage impacts incurred by the proposed development in relation to the previous approved DIAs which have addressed the following:

- Loss in flood storage volume due to filling up the Application Site;
- Increase in total runoff and peak discharge due to change in land use and the corresponding increase in CN value; and
- Blockage of existing drainage flow paths through the Application Site.

4.1.2 The proposed mitigation measures recommended in the previous approved DIAs are detailed in **Section 8** of this report and the adequacy of the previous agreed mitigation measures is discussed in **Section 9**.


5 METHODOLOGY FOR ASSESSMENT

5.1 OVERVIEW OF METHODOLOGY

5.1.1 This DIA is carried out in accordance with the requirements of “Advice Note No. 1 – Application of the Drainage Impact Assessment Process to Private Sector Projects” issued by DSD, as well as the Stormwater Drainage Manual - Fifth Edition (SDM).

5.1.2 The methodology for the hydrological and hydraulic assessment has been established and agreed in the previous approved DIAs. In this regard, the same methodology and principle are adopted in this assessment for the sake of consistency.

5.1.3 The logic flow of the analysis which agreed in the previous approved DIAs is illustrated by the following flow chart diagram:

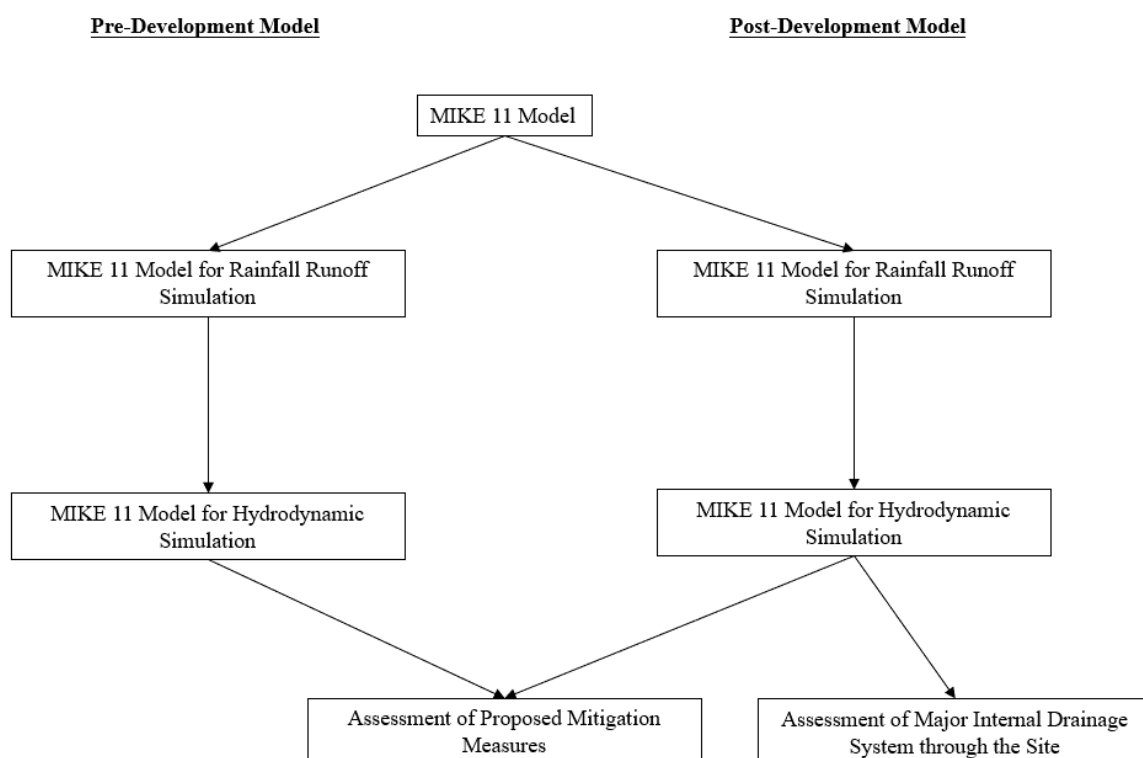

5.2 UPDATE THE MODEL SETTING

5.2.1 This assessment follows the approach of the previous approved DIAs, takes the previous approved model as a basis and refines to facilitate hydraulic assessment for the proposed development in the San Tin Basin.

5.2.2 Having reviewed the aerial photos and property information of San Tin Basin, the land use of this area is almost unchanged from last approved DIA in March 2024. The areas in the

Santin Basin, such as Wo Shang Wai, Rolling Hills, Noble Villas, Maple Gardens, Mai Po San Tsuen and Mai Po Lo Wai, are mostly developed 20 years ago, which is much earlier than the approval of last DIA. Meanwhile, the developments in the San Tin Basin mostly are low-density, which suggests the minor changes in runoff generation between pre-development and post-development. In addition, there should not be many changes to the Mai Po Tributary and Mai Po River since last approved DIA which was completed this year. Thus, the previous approved model is still reliable for this drainage impact assessment.

5.2.3 The catchment boundary with sub-catchment delineation for the pre-development and post-development scenarios are shown in **Figure 4** and **Figure 5**, respectively. Sub-catchments MP02A-a2 and MP02A-a3 under pre-development as shown in are delineated to MP02A-a9, MP02A-aa, -ab, -ac, -ad and -ae to simulate the drainage condition of the proposed development under post-development scenario. The sub-catchments under post-development scenario are refined based on the land use change within the Application Site as mentioned in the **Section 7** and **Appendix B**.

5.2.4 To simulate the flood plains, the approved assessment model used virtual side branches which have connections to river courses. The virtual side branches and the connections were named STS and STW in their prefixes, respectively.

5.2.5 For the pre-development model, due to the existing topography, the Application Site would become a flood plain under extreme rainfall and tidal events. To reflect the flood storage characteristics of the Application Site, the virtual side branches mentioned above is extended and connections are made to ch690 and ch490 in the pre-development model. These side branches and the connections at ch490 and ch690 are removed in the post-development scenario since the Application Site will be filled up by the proposed development and therefore will not be characterized as a flood plain.

5.3 RAINFALL – RUNOFF SIMULATION

5.3.1 In this DIA, a 4-hr synthetic rainfall profile, as shown in **Appendix E** was updated using the formulation mentioned in Section 4.3.5(b) in the DSD-SDM with parameters specified for HKO area referring to the Table 3a in the Stormwater Drainage Manual-Corrigendum No. 1/2024.

5.3.2 In addition, the potential drainage impact will consider the climate change effects up to end of 21st century. Referring to the Table 28 and 31 in the Stormwater Drainage Manual-Corrigendum No. 1/2022, 28.1 % rainfall increase due to climate change, including 16% rainfall increase and 12.1% design allowance, has been added into the 4-hr synthetic rainfall profiles.

5.3.3 The catchment MP02A-a2 and a3 under the pre-development scenario is re-delineated for the purpose of this development to develop the pre-development scenario to incorporate the latest information as mentioned below.

5.3.4 The increase in CN value due to the proposed development is reflected in the post-development model.

5.4 HYDRODYNAMIC SIMULATION

5.4.1 The hydrodynamic model performs the hydrodynamic run to assess the hydraulic performance of river courses and drains.

5.4.2 The boundary condition (i.e. Tide level) adopted in this assessment is referred to the Table 8, Table 29, Table 30b and Table 31 in the Stormwater Drainage Manual- Corrigendum No. 1/2022, as shown in the following table:

Table 5-1 Design Tide level at Tsim Bei Tsui

| Return period (Years) | Design extreme sea level (mPD) | Mean Sea Level Rise due to Climate Change (mPD) | Storm Surge Increase in End of 21st century (mPD) | Design Allowance in End of 21st century (mPD) | Design extreme sea level considering climate change effect (mPD) |
|------------------------------|---------------------------------------|--|--|--|---|
| | A | B | C | D | E=A+B+C+D |
| 2 | 3.07 | 0.47 | 0.09 | 0.20 | 3.83 |
| 10 | 3.52 | 0.47 | 0.15 | 0.23 | 4.37 |
| 50 | 4.09 | 0.47 | 0.20 | 0.25 | 5.01 |
| 200 | 4.78 | 0.47 | 0.26 | 0.27 | 5.78 |

5.5 SCENARIOS FOR IMPACT ASSESSMENT

5.5.1 It is confirmed in the previous approved DIAs that the impacts to river courses other than Mai Po Tributary and Mai Po River are very minimal and therefore only the impacts to Mai Po Tributary and Mai Po River are assessed in this assessment.

5.5.2 The high antecedent moisture conditions (AMC3²) are adopted in this assessment model in consistency with the previous approved DIAs. The worst-case scenario amongst the two conditions will be used in the analysis for the proposed mitigation measures.

5.5.3 Hydraulic impact incurred by rainfall profiles with areal reduction factors of 0.82 and 1.0 are analysed in consistency with the previous approved DIAs. Areal reduction factor of 1.0

² AMC3 = heavy rainfall occurred within last 5 days; saturated soil

was used for the San Tin Basin to estimate peak flood levels for all areas in the San Tin Basin. Whilst an aerial reduction factor of 0.82 was used for the entire Shenzhen River Basin including the catchments draining from Chinese Mainland to estimate peak flood levels for the Shenzhen River. The worst-case scenario from the two conditions will be used in the analysis for the proposed mitigation measures.

5.5.4 Hydraulic performance for 2, 10, 50 and 200yr Average Recurrence Interval (ARI) events for the Application Site, Mai Po Tributary and Mai Po River will be assessed in accordance with the requirement stipulated in the Advice Note No.1. A, B and C scenarios under respective ARI event are simulated according to the following table:

Table 5-2 Summary of Assessment Scenarios

| ARI Event | Abbreviation | Areal Reduction Factor | Rainfall | Tide Level |
|------------------|---------------------|-------------------------------|-----------------|-------------------|
| 2 | 2A | 0.82 | 2 yr | 2 yr |
| | 2C | 1.00 | 2 yr | 2 yr |
| 10 | 10A | 0.82 | 10 yr | 2 yr |
| | 10B | 0.82 | 2 yr | 10 yr |
| | 10C | 1.00 | 10 yr | 2 yr |
| 50 | 50A | 0.82 | 50 yr | 10 yr |
| | 50B | 0.82 | 10 yr | 50 yr |
| | 50C | 1.00 | 50 yr | 10 yr |
| 200 | 200A | 0.82 | 200 yr | 10 yr |
| | 200B | 0.82 | 10 yr | 200 yr |
| | 200C | 1.00 | 200 yr | 10 yr |

Note: same as the previous approved DIAs

6 DESIGN ASSUMPTIONS AND PARAMETERS

6.1.1 Design assumptions and parameters agreed in the previous approved DIAs would be adopted in this assessment. The rationale of adopting the set of parameters in the assessment is reiterated in the sections below.

6.1.2 The manning's n to be adopted in this assessment is referred to the previously approved DIAs while the Colebrook White K_s roughness is referred to DSD-SDM. The surface roughness coefficients adopted in this assessment are summarized in:

Table 6-1 Surface's Roughness Coefficient

| Surface Type | Manning's n | CW's k_s |
|--|-------------------------------------|----------------------------------|
| Engineered channels (Smooth Concrete surfacing) | 0.015 | N/A |
| Engineered channels (Rough Concrete surfacing) | 0.020 | N/A |
| Engineered channels (Smooth Natural bed) | 0.020 | N/A |
| Engineered channels (Rough Natural bed) | 0.025 | N/A |
| Natural Channel | 0.035 | 0.6 |
| One culvert system with rough natural bed in MAI PO River CH1625 | 0.040 | 1.5 |
| Concrete Pipe (Fair Condition) | 0.015 | N/A |
| Concrete Pipe (Bad Condition) | 0.016 | 3.0 |

Note: same as the previous approved DIAs

7 PROPOSED CHANGES TO THE DRAINAGE CHARACTERISTICS

7.1 CHANGES IN LAND USE

7.1.1 The Application Site is a vacant lot with a combination of greenfield, access road and other impervious areas. The approved developments will lead to increase in paved surface and thus the CN value. The current amendment scheme will largely maintain the impervious and pervious coverage. The CN value for the Application Site under post-development scenario is estimated to be 93. The land use coverage and the corresponding CN values are detailed in **Table 7-1**.

Table 7-1 CN Values of Pre & Post Developments for the Application Site

| Land Use | Area (m ²) | CN Value |
|--|------------------------|----------|
| Pre-Development | | |
| Vacant Lot (Northern portion of Application Site – MP02A-a2) | 145,400 | 85 |
| Vacant Lot (Southern Portion of Application Site – MP02A-a3) | 62,000 | 85 |
| Total | 207,400 | 85 |
| Post-Development (Previous Approved DIA in 2015) | | |
| Wetland Restoration Area (MP02A-a9) | | |
| Open Water Surface | 34,500 | 100 |
| Vegetated Area | 12,900 | 100 |
| - Sub-total | 47,400 | 100 |
| Residential Area (MP02A-aa, ab, ac, ad and ae) | | |
| Paved Area | 82,700 | 95 |
| Vegetated Area | 74,300 | 80 |
| Pool Area | 3,000 | 100 |
| - Sub-total | 160,000 | 88 |
| Total | 207,400 | 90.8 |
| Post-Development (Previous Approved DIA in 2021) | | |
| Wetland Restoration Area (MP02A-a9) | | |
| Open Water Surface | 34,500 | 100 |
| Vegetated Area | 12,900 | 100 |
| - Sub-total | 47,400 | 100 |

| | | |
|---|----------------|-------------|
| Residential Area (MP02A-aa, ab, ac, ad and ae) | | |
| Paved Area | 83,098 | 95 |
| Vegetated Area | 71,475 | 80 |
| Pool Area | 5,435 | 100 |
| - Sub-total | 160,008 | 88 |
| Total | 207,408 | 91.1 |
| Post-Development (Previous Approved DIA in March 2024) | | |
| Wetland Restoration Area (MP02A-a9) | | |
| Open Water Surface | 34,500 | 100 |
| Vegetated Area | 12,900 | 100 |
| - Sub-total | 47,400 | 100 |
| Residential Area (MP02A-aa, ab, ac, ad and ae) | | |
| Paved Area | 97,776 | 95 |
| Vegetated Area | 62,232 | 80 |
| Pool Area | 730 | 100 |
| - Sub-total | 160,008 | 90 |
| Total | 207,408 | 92 |
| Post-Development (Current Arrangement) | | |
| Wetland Restoration Area (MP02A-a9) | | |
| Open Water Surface | 34,500 | 100 |
| Vegetated Area | 12,900 | 100 |
| - Sub-total | 47,400 | 100 |
| Residential Area (MP02A-aa, ab, ac, ad and ae) | | |
| Paved Area | 106,189 | 95 |
| Vegetated Area | 48,716 | 80 |
| Pool Area | 5,103 | 100 |
| - Sub-total | 160,008 | 91 |
| Total | 207,408 | 93 |

7.1.2 CN value of abandoned ponds adopted in both the pre-development and post-development models is revised to 100 to reflect its hydrological characteristic. **Table 7-2 and Table 7-3** present the detailed CN values applied for both the pre- and post-development model.

Table 7-2 CN Values Applied for the Pre-Development Model

| Catchment ID | Land Use | Percentage of Full Catchment | Area(m²) | CN Value |
|------------------------|---|-------------------------------------|----------------------------|-----------------|
| MP02A-a1 | Abandoned Ponds | 48.5% | 373,800 | 100 |
| MP02A-a2 | Vacant Lot – Northern Portion of proposed Development | 18.8% | 145,400 | 85 |
| MP02A-a3 | Vacant Lot – Southern Portion of proposed Development | 8.1% | 62,000 | 85 |
| MP02A-a4 | WSW Village | 1.8% | 13,700 | 90 |
| MP02A-a5 | Vacant Lots between Castle Peak Rd & Royal Palms | 10.8% | 82,800 | 85 |
| MP02A-a6 | Vacant Lots between Castle Peak Rd & Royal Palms | 2.2% | 17,100 | 85 |
| MP02A-a7 | Vacant Lot | 2.7% | 20,800 | 85 |
| MP02A-a8 | Vacant Lot | 2.7% | 20,800 | 85 |
| Revised MP02A-a | Total | 100.0% | 770,300 | 93.4 |

Table 7-3 CN Values Applied for the Post-Development Model

| Catchment ID | Land Use | Percentage of Full Catchment | Area(m²) | CN Value |
|---------------------|-----------------|-------------------------------------|----------------------------|-----------------|
| MP02A-a1 | Abandoned Ponds | 48.5% | 373,800 | 100 |
| MP02A-a4 | WSW Village | 1.8% | 13,700 | 90 |

| | | | | |
|----------------------------|---|---------------|----------------|-----------|
| MP02A-a5 | Vacant Lots between Castle Peak Rd & Royal Palms | 10.8% | 82,800 | 85 |
| MP02A-a6 | Vacant Lots between Castle Peak Rd & Royal Palms | 2.2% | 17,100 | 85 |
| MP02A-a7 | Vacant Lot | 2.7% | 20,800 | 85 |
| MP02A-a8 | Vacant Lot | 2.7% | 20,800 | 85 |
| MP02A-a9 | Wetland Restoration Area | 6.2% | 47,400 | 100 |
| MP02A-aa | Western Residential Portion of the Application Site | 3.6% | 27,283 | 91 |
| MP02A-ab | Southern Residential Portion of the Application Site | 7.8% | 57,174 | 91 |
| MP02A-ac | Mid-Western Residential Portion of the Application Site | 2.8% | 23,698 | 91 |
| MP02A-ad | Mid-Eastern Residential Portion of the Application Site | 2.7% | 22,387 | 91 |
| MP02A-ae | Eastern Residential Portion of the Application Site | 3.9% | 29,444 | 91 |
| Revised MP02A-a | Total | 100.0% | 770,300 | 95 |

Note: The land-use information for post-development is the same as the previous approved DIAs

7.1.3 The model network illustrating the chainage along Mai Po River is shown in **Figure 1**. The hydrological model parameters for the re-delineated MP02A-a for both the pre- and post-development models is attached in **Appendix F**.

8 PROPOSED DRAINAGE ARRANGEMENT AND MITIGATION MEASURES

8.1 OVERVIEW OF PROPOSED DRAINAGE ARRANGEMENT AND MITIGATION MEASURES

8.1.1 Following the previous approved DIAs, the proposed drainage system will mainly comprise of an approximate 350m long 3.5m(W) x 2.5m(H) box culvert and a drainage pipe network of pipe size ranging from 1050mm to 2100mm dia. as shown in **Figure 6**. The box culvert will drain the eastern portion of the Application Site (MP02A-ae) as well as the runoff from the vacant lots between Castle Peak Road and Royal Palms while the pipe network will convey the runoff from Wo Shang Wai Village (MP02A-a4) and western and central portions of the Application Site (MP02A-aa, ab, ac and ad).

8.1.2 The invert levels are 2.91mPD for the proposed terminal drainage pipe (DN2100), and 1.71mPD for the proposed terminal box culvert (3.5m in width x 2.5m in height), which are both higher than the invert level of Mai Po Tributary of 1.38mPD based on the previous approved DIA.

8.1.3 All these drains will be discharged to Mai Po Tributary at the northern site boundary. This drainage arrangement within the Application Site is indicated in **Figure 6**.

8.2 DETENTION BY THE AS-BUILT WETLAND RESTORATION AREA

8.2.1 Wetland Restoration Area (WRA) has been constructed, in accordance with the town planning approvals. It will attenuate the discharge from the WRA itself to mitigate the potential adverse drainage impact due to the CN values increase in the development. The drainage system of Wetland Restoration Area (i.e.MP02A-a9) is totally independent from the drainage system of the residential areas of the development.

8.2.2 The Wetland Restoration Area only collects runoff generated within itself. No runoff generated from residential areas of development is discharged to WRA or vice versa even during the severe rainstorm event.

8.2.3 To attenuate the discharge from Wetland Restoration Area, it is designed to be a large detention pond. The attenuation effect of the Wetland Restoration Area has been achieved by its large buffer volume in conjunction with the outlet structures that control the discharge flow rate.

8.2.4 The outlet structures compose of twin 225mm pipes and a 4m wide emergency bypass spillway with invert level at 4.2mPD and 4.65mPD respectively. The twin 225mm pipes are for control of normal water level and the spillway is for relieving excessive flow. The rating

curves for outlet structures and discharge hydrographs under various scenarios are shown in **Appendix G**. As illustrated on the hydrographs, the runoff from Wetland Restoration Area has been significantly attenuated and the peak discharges from WRA will be trimmed to about 18% of the peak inflow.

8.2.5 According to the assessment result, the freeboards of Wetland Restoration Area (i.e., measured from the embankment level at 5.0mPD) under 50yr and 200yr ARI events are both more than 200mm.

8.2.6 After passing of a 50yr ARI rainstorm, it would take approximate 1 day to drain back to normal water level which is at 4.2mPD. Penstocks will be installed, so that the drain-off process can speed up if necessary.

8.2.7 The key dimensions of the wetland restoration area are summarized in **Table 8-1**.

Table 8-1 Key Dimensions of Wetland Restoration Area

| Key Dimensions | |
|----------------|-----------------------|
| Area | 47,400 m ² |
| Maximum Width | 120 m |
| Maximum Length | 530 m |
| Average Depth | 1.5 m |

8.2.8 To prevent pollution and impacts on the WRA and its irrigation structures caused by surface runoff from the residential portion, a bund wall (or solid protective barrier) and a surface channel are proposed along the boundary between the residential area and WRA, as shown in **Figure 6**. The bund wall will stop the runoff from flowing into the WRA and ensure it is retained in the residential area until drained through the surface channel. The design of surface channel will be considered at the detailed design stages, and ensure there would not be runoff/flow into the WRA.

8.3 RE-PROVISION OF DRAINAGE PATH – WO SHANG WAI VILLAGE

8.3.1 The runoff within WSW Village is currently discharged to the Application Site via a storage pond and pumping system maintained by the local villagers, then discharges to Mai Po Tributary through 2×200mm dia. drainage pipes in the Application Site, as shown in **Figure 3**. Upon completion of the development, the existing pipes will be demolished and a designated drain with diameter 1050mm to 2100mm will be re-provided for conveying the flow from the outlets of the pump to Mai Po Tributary. This drainage pipe will also convey the runoff from western and central portions of the Application Site (MP02A-aa, ab, ac and ad). The arrangements of the inlets and outlets are the same as the previous approved DIAs.

8.3.2 The discharge from WSW Village will be collected by an inlet chamber within the Application Site. Openings will be provided at the existing invert level of the discharge pipes,

which is at +4.2mPD, for connection. The runoff will be conveyed to Mai Po Tributary by a designated drainage system mentioned above. Therefore, the proposed development would not change the discharge pattern of Wo Shang Wai Village drainage system as approved.

8.3.3 If the existing pumps at Wo Shang Wai Village become malfunction during severe rainstorm event, the runoff from Wo Shang Wai Village cannot discharge to the surrounding area and will be cumulated within the village. According to Table 4 of Stormwater Drainage Manual, a total of 446mm depth of rainfall will be incurred under a 200yr return period 4-hour rainfall event. In this connection, the water level at Wo Shang Wai Village will reach approximately +3.3mPD. However, the water will not overflow to the Application Site as there is a bund at the northern boundary of Wo Shang Wai Village which at the level of more than +5mPD, as shown in **Appendix C** and **L**. Therefore, based on the current conditions, overflow cannot enter the Application Site, and this status will remain unaffected by future development.

8.3.4 A flap valve will be installed at the outfall of the designated pipe to prevent backwater effect from Mai Po Tributary. Since no proposed measures will be carried out in Wo Shang Wai Village, the existing pumping configuration from WSW Village will be unchanged.

8.4 RE-PROVISION OF DRAINAGE PATH - VACANT LOTS BETWEEN CASTLE PEAK RD & ROYAL PALMS, SAME AS PREVIOUS APPROVED DIAS

8.4.1 A 3.5m(W) x 2.5m(H) box culvert is proposed in the previous approved DIAs to convey the runoff from the area between Royal Palms and Castle Peak Road – Mai Po (MP02A-a5), a section south of Royal Palms (MP02A-a6) and east parts of the Application Site. The box culvert will have a larger hydraulic capacity than the existing three 1350mm dia. pipes.

8.4.2 The box culvert is sized for the 1 in 50-year design return period according to the recommendation in Table 10 of the DSD-SDM. The box culvert has been designed to capture the discharge from the existing triple 1.35m diameter culvert as discussed in **Section 3.3**. This arrangement is the same as the previous approved DIAs. A trash grille and flap valve will be provided at the final discharge point of the box culvert that connects to Mai Po Tributary.

8.5 MISCELLANEOUS, SAME AS PREVIOUS APPROVED DIAS

8.5.1 Bank protection measures will be provided at the outfalls of the proposed drainage system to minimize the risk of scouring and erosion of the riverbed.

9 ASSESSMENT ON DRAINAGE IMPACT

9.1 ASSESSMENT OF MAI PO TRIBUTARY AND MAI PO RIVER

9.1.1 With the incorporation of the proposed mitigation measures stipulated in **Section 8** following the previous approved DIAs, hydraulic performance of the Application Site, Mai Po Tributary and Mai Po River is assessed according to the methodology stipulated in **Section 5**. The results of peak runoff, total runoff and max water level under 50ARI event are summarized in **Table 9-1**, **Table 9-2** and **Table 9-3**, respectively.

Table 9-1 Change in Peak Discharge from the Application Site

| Rainfall return-periods (Yr) | Pre-development peak discharge (m ³ /s) | Post-development peak discharge (m ³ /s) | Change in peak discharge (m ³ /s) |
|------------------------------|--|---|--|
| 2yr | 9.29 | 7.98 | -1.31 |
| 10yr | 12.30 | 10.33 | -1.98 |
| 50yr | 14.29 | 11.47 | -2.81 |
| 200yr | 15.65 | 12.90 | -2.74 |

Note: Values based on scenario C, AMC 3

Table 9-2 Change in Total Runoff from the Application Site

| Rainfall return-periods (Yr) | Total Runoff from Pre-Developed Application Site (m ³) | Total Runoff from Post-Developed Application Site (m ³) | Change in Total Runoff (m ³) |
|------------------------------|--|---|--|
| 2yr | 33,585 | 39,624 | 6,039 |
| 10yr | 54,472 | 60,586 | 6,114 |
| 50yr | 72,605 | 76,784 | 4,179 |
| 200yr | 88,334 | 94,497 | 6,163 |

Note: Values based on scenario C, AMC 3

Table 9-3 Change in Water Level along Mai Po River and Mai Po Tributary under 50yr ARI

| River chainage (m) | Water level(mPD) Pre-development | | | Water level(mPD) Post-development | | | Change in water level(m) | | |
|--------------------|----------------------------------|-------|-------|-----------------------------------|-------|-------|--------------------------|-------|--------|
| | 50A | 50B | 50C | 50A | 50B | 50C | 50A | 50B | 50C |
| 0 | 3.778 | 3.934 | 3.835 | 3.771 | 3.937 | 3.835 | -0.007 | 0.003 | 0.000 |
| 690 | 3.772 | 3.929 | 3.827 | 3.765 | 3.931 | 3.827 | -0.007 | 0.002 | 0.000 |
| 980 | 3.766 | 3.926 | 3.822 | 3.761 | 3.929 | 3.822 | -0.005 | 0.003 | 0.000 |
| 1150 | 3.756 | 3.923 | 3.812 | 3.750 | 3.925 | 3.811 | -0.006 | 0.002 | -0.001 |

| | | | | | | | | | |
|------|-------|-------|-------|-------|-------|-------|--------|-------|--------|
| 1620 | 3.750 | 3.927 | 3.809 | 3.743 | 3.930 | 3.809 | -0.007 | 0.003 | 0.000 |
| 1880 | 3.573 | 3.890 | 3.656 | 3.565 | 3.893 | 3.652 | -0.008 | 0.003 | -0.004 |

9.1.2 The change in water level along Mai Po Tributary and Mai Po River under 2yr, 10yr, 50yr and 200yr ARI events are summarized in **Appendix I**.

9.1.3 Although there will be increase in CN value causing increasing total runoff, by the detention effect of the as-built Wetland Restoration Area at the northern part of the Application Site independent from the drainage system of the residential areas, the peak discharge from the Application Site will be significantly attenuated, as shown in **Appendix H** and there will be no adverse drainage impacts to the Application Site, Mai Po Tributary and Mai Po River under 50yr ARI event. This arrangement is the same as the previous approved DIAs.

9.1.4 The water level at Mai Po River and Mai Po Tributary would not increase due to the change, as shown in **Table 9-3**. It is concluded that the recommendation made in the previous approved DIAs is adequate to mitigate the potential drainage impact due to the revised master layout.

9.2 ASSESSMENT OF DESIGNATED DRAIN FOR WESTERN PORTION

9.2.1 As revealed by the model simulation results in **Appendix J**, the water level at the outlet of the designated drain for Wo Shang Wai and the west portion of Application Site is much lower than the ground level of the Application Site (6.8mPD). In this regard, the designated drain will not incur adverse impact to the Application Site.

9.3 ASSESSMENT OF PROPOSED 3.5M(W) X 2.5M(H) BOX CULVERT

9.3.1 Since the current proposal following the previous approved DIAs will have a larger hydraulic capacity than the existing triple pipes, there will be no adverse drainage impact to Application Site. The freeboard of the outlet of the box culvert is shown in **Appendix K**.

9.4 ASSESSMENT OF IMPACT OF ADDITIONAL TREATED EFFLUENTS

9.4.1 Under an optional scenario as proposed in the Sewage Impact Assessment to manage the sewage generation from the proposed development, 3,779.16m³/day of treated water after tertiary treatment of Membrane Bioreactor process by a temporary on-site sewage treatment plant which will be discharged to Mai Po Tributary. Assume the worst case that this water will

be discharged to Mai Po Tributary in 4 hours per day (same as the rainfall duration under assessment), so the additional flow rate of the treated water is $0.26\text{m}^3/\text{s}$. The flow rate of the treated water from the on-site sewage treatment plant has been included in the simulation model.

10 TEMPORARY DRAINAGE ARRANGEMENT

10.1.1 Large scale site formation works will be included in the construction stage of the proposed development. During the rainstorm events, construction site runoff would come from all over the works site. The principal drainage impacts which are associated with construction of the works have been identified as follows:

- Erosion of ground materials;
- Sediment transportation to existing downstream drainage system, and
- Obstruction to drainage systems.

10.1.2 Construction runoff would cause impact to the stormwater drainage system. Runoff with concrete and cement-derived material would cause blockage of drainage channels and increase of suspended solid levels in the downstream drainage system. Sediment deposition rate would be increased and hence lower the capacity of the downstream drainage.

10.1.3 Since large area of soil will be exposed during the construction, in order to eliminate the source of contamination, the exposed soil, especially for the open stockpiles area, shall be covered properly by suitable material such as geotextile or tarpaulin to minimize the amount of soil being washed into the downstream drainage system.

10.1.4 The construction runoff which is contaminated by suspended solids, dust and waste shall be properly treated before discharging to the public drainage system. Sedimentation tank, sand/silt traps or other desilting facilities shall be provided to collect debris and silt and allow sedimentation before discharge. Channels / earth bunds / sand bag barriers shall be provided on site to properly direct the runoff to the desilting facilities. Those desilting facilities should be adequately designed and be inspected and cleaned out in a regular basis to maintain its functionality.

10.1.5 Moreover, temporary drainage system designed with sufficient capacity should be provided to prevent the flood risk within the Application Site. For example, perimeter channels should be provided at site boundary to intercept surface runoff from outside the Application Site so that overland flow across the Application Site can be avoided.

10.1.6 Further guidelines and site practices outlined in EPD's Practice Note ProPECC PN1/94, DSD Technical Circular No. 14/2000 – Temporary Flow Diversions and Temporary Works Affecting Capacity in Stormwater Drainage System, and DSD Practice Note No. 1/2004 – Design Rainfall Depth for Temporary Works within the Dry Season shall be followed as far as practicable to minimize the adverse drainage impact caused by the construction works.

11 MAINTENANCE RESPONSIBILITIES

11.1.1 Following the previous approved DIAs, the Applicant will be responsible for the maintenance of all surface channels, underground drainage system and stormwater retention facilities within the Application Site, including designated drainage facilities for conveying runoff generated from Wo Shang Wai Village and the area between Royal Palms and Castle Peak Road – Mai Po.

11.1.2 The designated drainage system serving Wo Shang Wai Village within the Application Site will be maintained by the Applicant while the storage pond and the pumps within Wo Shang Wai Village will be maintained by the villagers.

11.1.3 The maintenance responsibility of all drainage facilities outside the Application Site will remain unchanged.

12 SUMMARY AND CONCLUSIONS

12.1.1 The previous approved residential development comprises of residential buildings, a communal garden area, a restored wetland and residential facilities. The total site area is approximately 207,408m².

12.1.2 To offset the increase in pavement area after development, a Wetland Restoration Area has been built, which has a sufficient detention effect to mitigate the potential drainage impacts. The drainage system of the Wetland Restoration Area (i.e.MP02A-a9) is totally independent on the drainage system of the residential areas of the proposed development.

12.1.3 The permanent drainage system for the proposed development will comprise of an approximately 300m (L) x 2.5m(H) x 3.5m(W) box culvert and a drainage pipe network of pipe sizes ranging from 1050mm to 2100mm in diameter. The box culvert will drain the eastern portion of the Application Site (MP02A-ae) and the runoff from the vacant lots between Castle Peak Road and Royal Palms, while the pipe network will convey the runoff from Wo Shang Wai Village (MP02A-a4) and western and central portions of the Application Site (MP02A-aa, ab, ac and ad).


12.1.4 The DIA for the previously approved Section 16 Planning Application was approved for all the groundwork. The mitigation measures outlined in **Section 8** above are in line with the previous approved DIAs. Subsequent to the currently proposed revision of the Master Layout Plan, the DIA has been updated, and the same mitigation measures are incorporated. These proposed mitigation measures are sufficient to mitigate the potential drainage impacts of the change in master layout. It is concluded that the completion of the proposed development will not aggravate the flooding conditions around the Application Site.

12.1.5 Under an optional scenario as proposed in the Sewage Impact Assessment to manage the sewage generation from the proposed development, 3,779.16m³/day of treated water from a temporary on-site sewage treatment plant within the Application Site will be discharged to Mai Po Tributary. Even under the worst case that this water will be discharged to Mai Po Tributary in 4 hours per day, the flow rate of the treated water of 0.26m³/s from the on-site sewage treatment plant is included in the simulation and has no adverse impact on assessment results and water level of Mai Po River.

12.1.6 Temporary drainage arrangement within the site will be implemented during construction stage to avoid imposing unacceptable flood risk to the adjacent areas.

12.1.7 The Applicant will take up the maintenance responsibilities for the proposed drainage system inside the Application Site including the proposed main trunk box-culvert and designated drainage system for WSW Village and outfall structures.

Figures

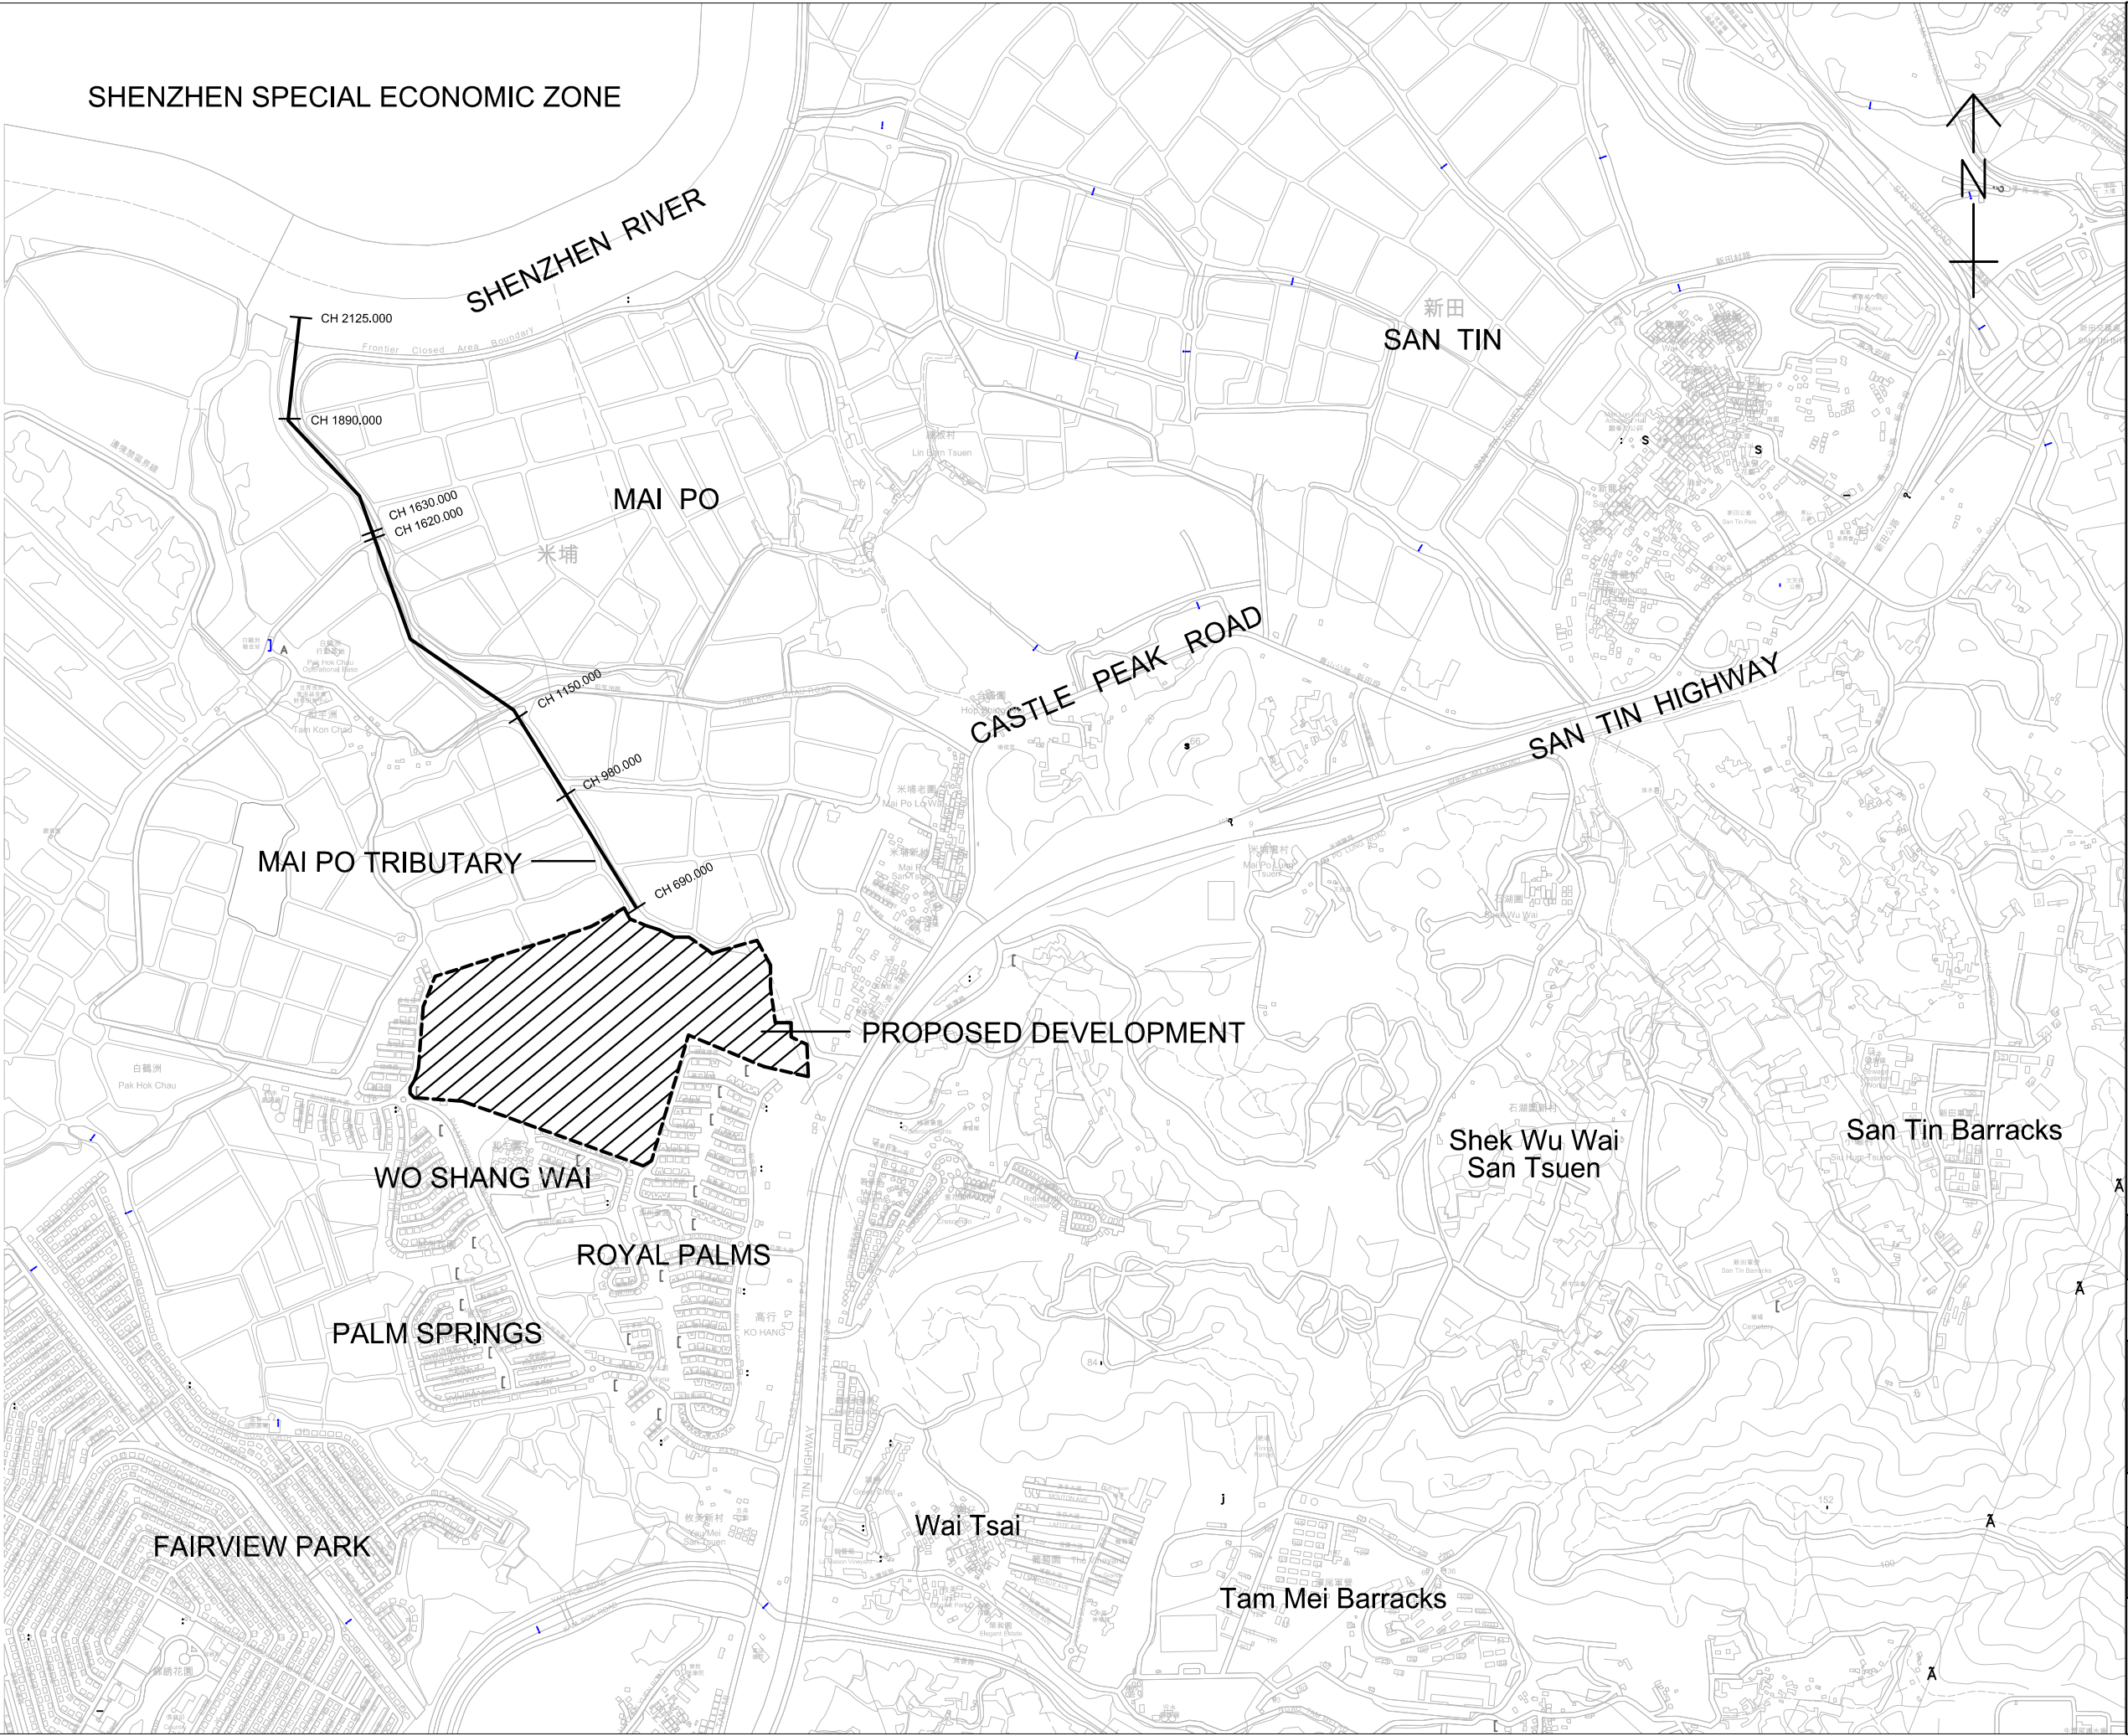

LEGEND



PROPOSED DEVELOPMENT


CH690

RIVER CHAINAGE OF MAI PO
RIVER DEFINED IN MIKE 11 MODEL

WSP HONG KONG LIMITED
PROPOSED COMPREHENSIVE DEVELOPMENT
AT WO SHANG WAI, YUEN LONG

LOCATION PLAN OF
PROPOSED
DEVELOPMENT

FIGURE 1

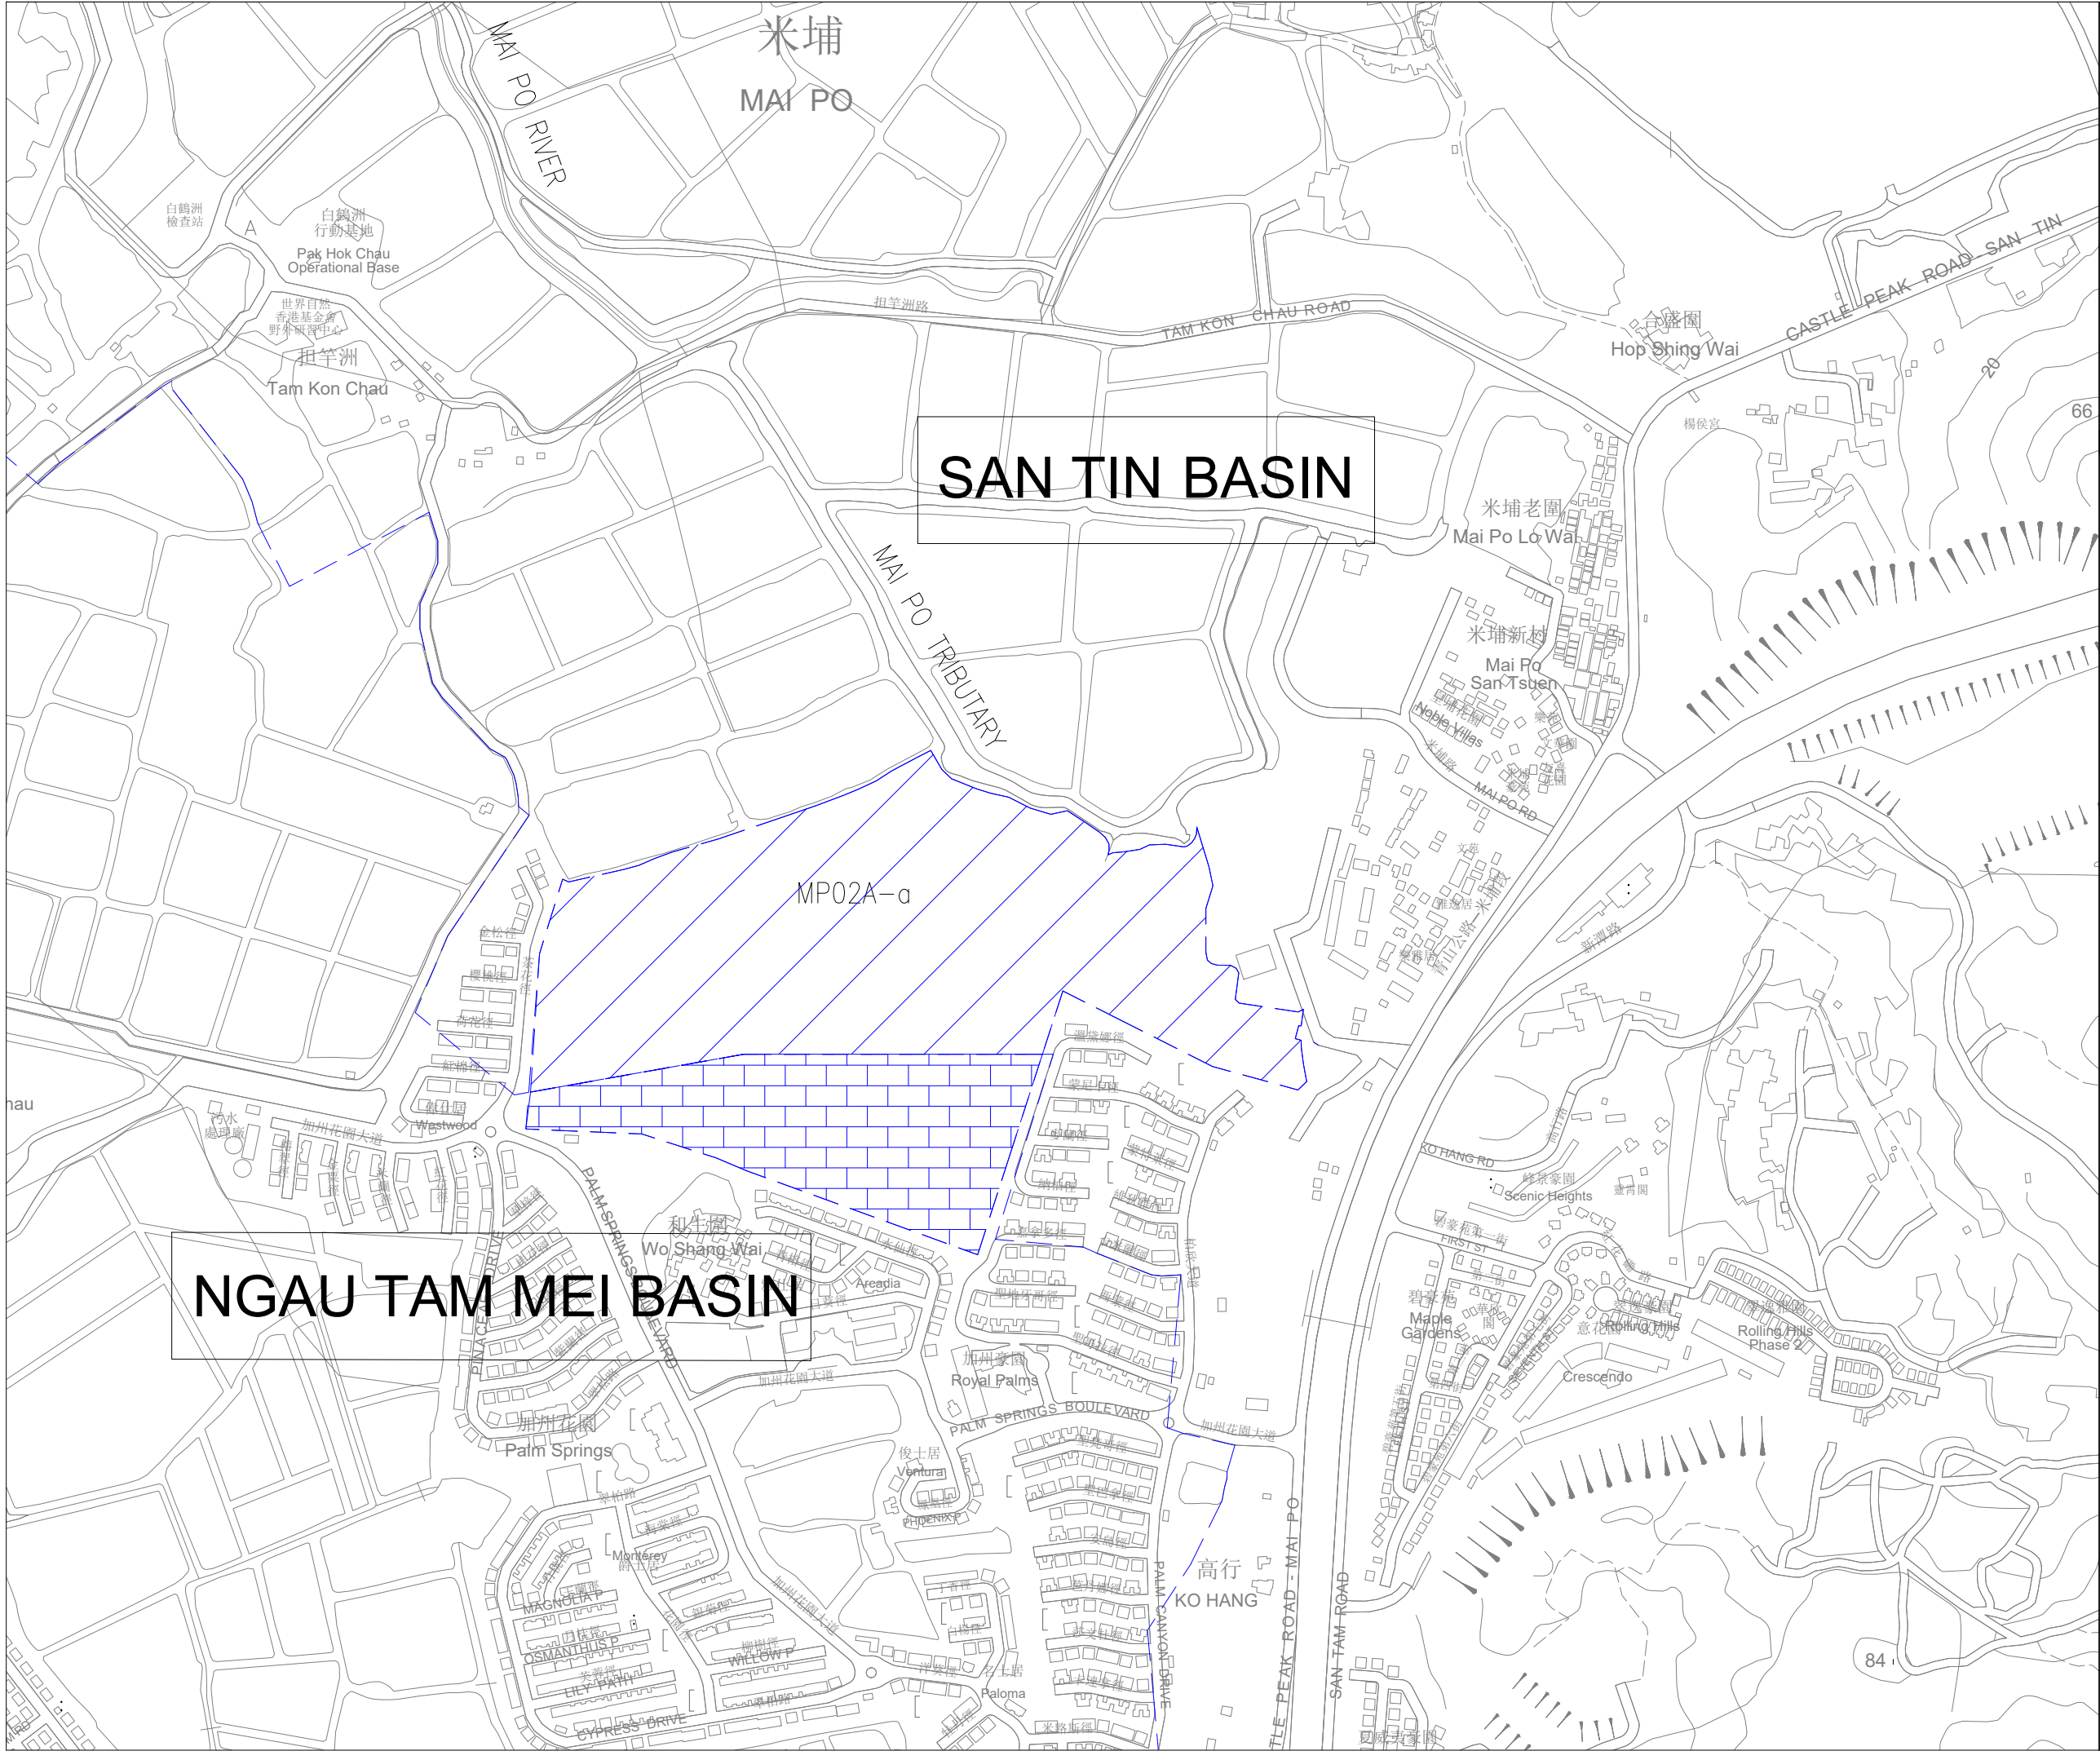LOCATION PLAN

LEGENDS:



SUB-CATCHMENT MP02A-a
AS PER NORTHERN NEW
TERRITORY DRAINAGE MASTER
PLAN

APPLICATION SITE WITHIN SAN
TIN BASIN

APPLICATION SITE WITHIN
NGAU TAM MEI BASIN




| | | | |
|---|-------------|---------|----------|
| Rev | Description | By | Date |
| Consultant | | | |
| Project title | | | |
| DRAINAGE IMPACT ASSESSMENT | | | |
| To Amend the Notes of the "Comprehensive Development to include Wetland Restoration Area" Zone for a Proposed Comprehensive Development at Wo Shang Wai, Yuen Long, Lots 77 and 50 S.A in DD101 | | | |
| Drawing title | | | |
| SUB-CATCHMENT PLAN OF MP02A-a | | | |
| Drawing no. | | Rev. | |
| Figure 2 | | 0 | |
| Drawn | Date | Checked | Approved |
| JX | AUG2024 | - | - |
| Scale | 1:3000 | Status | |

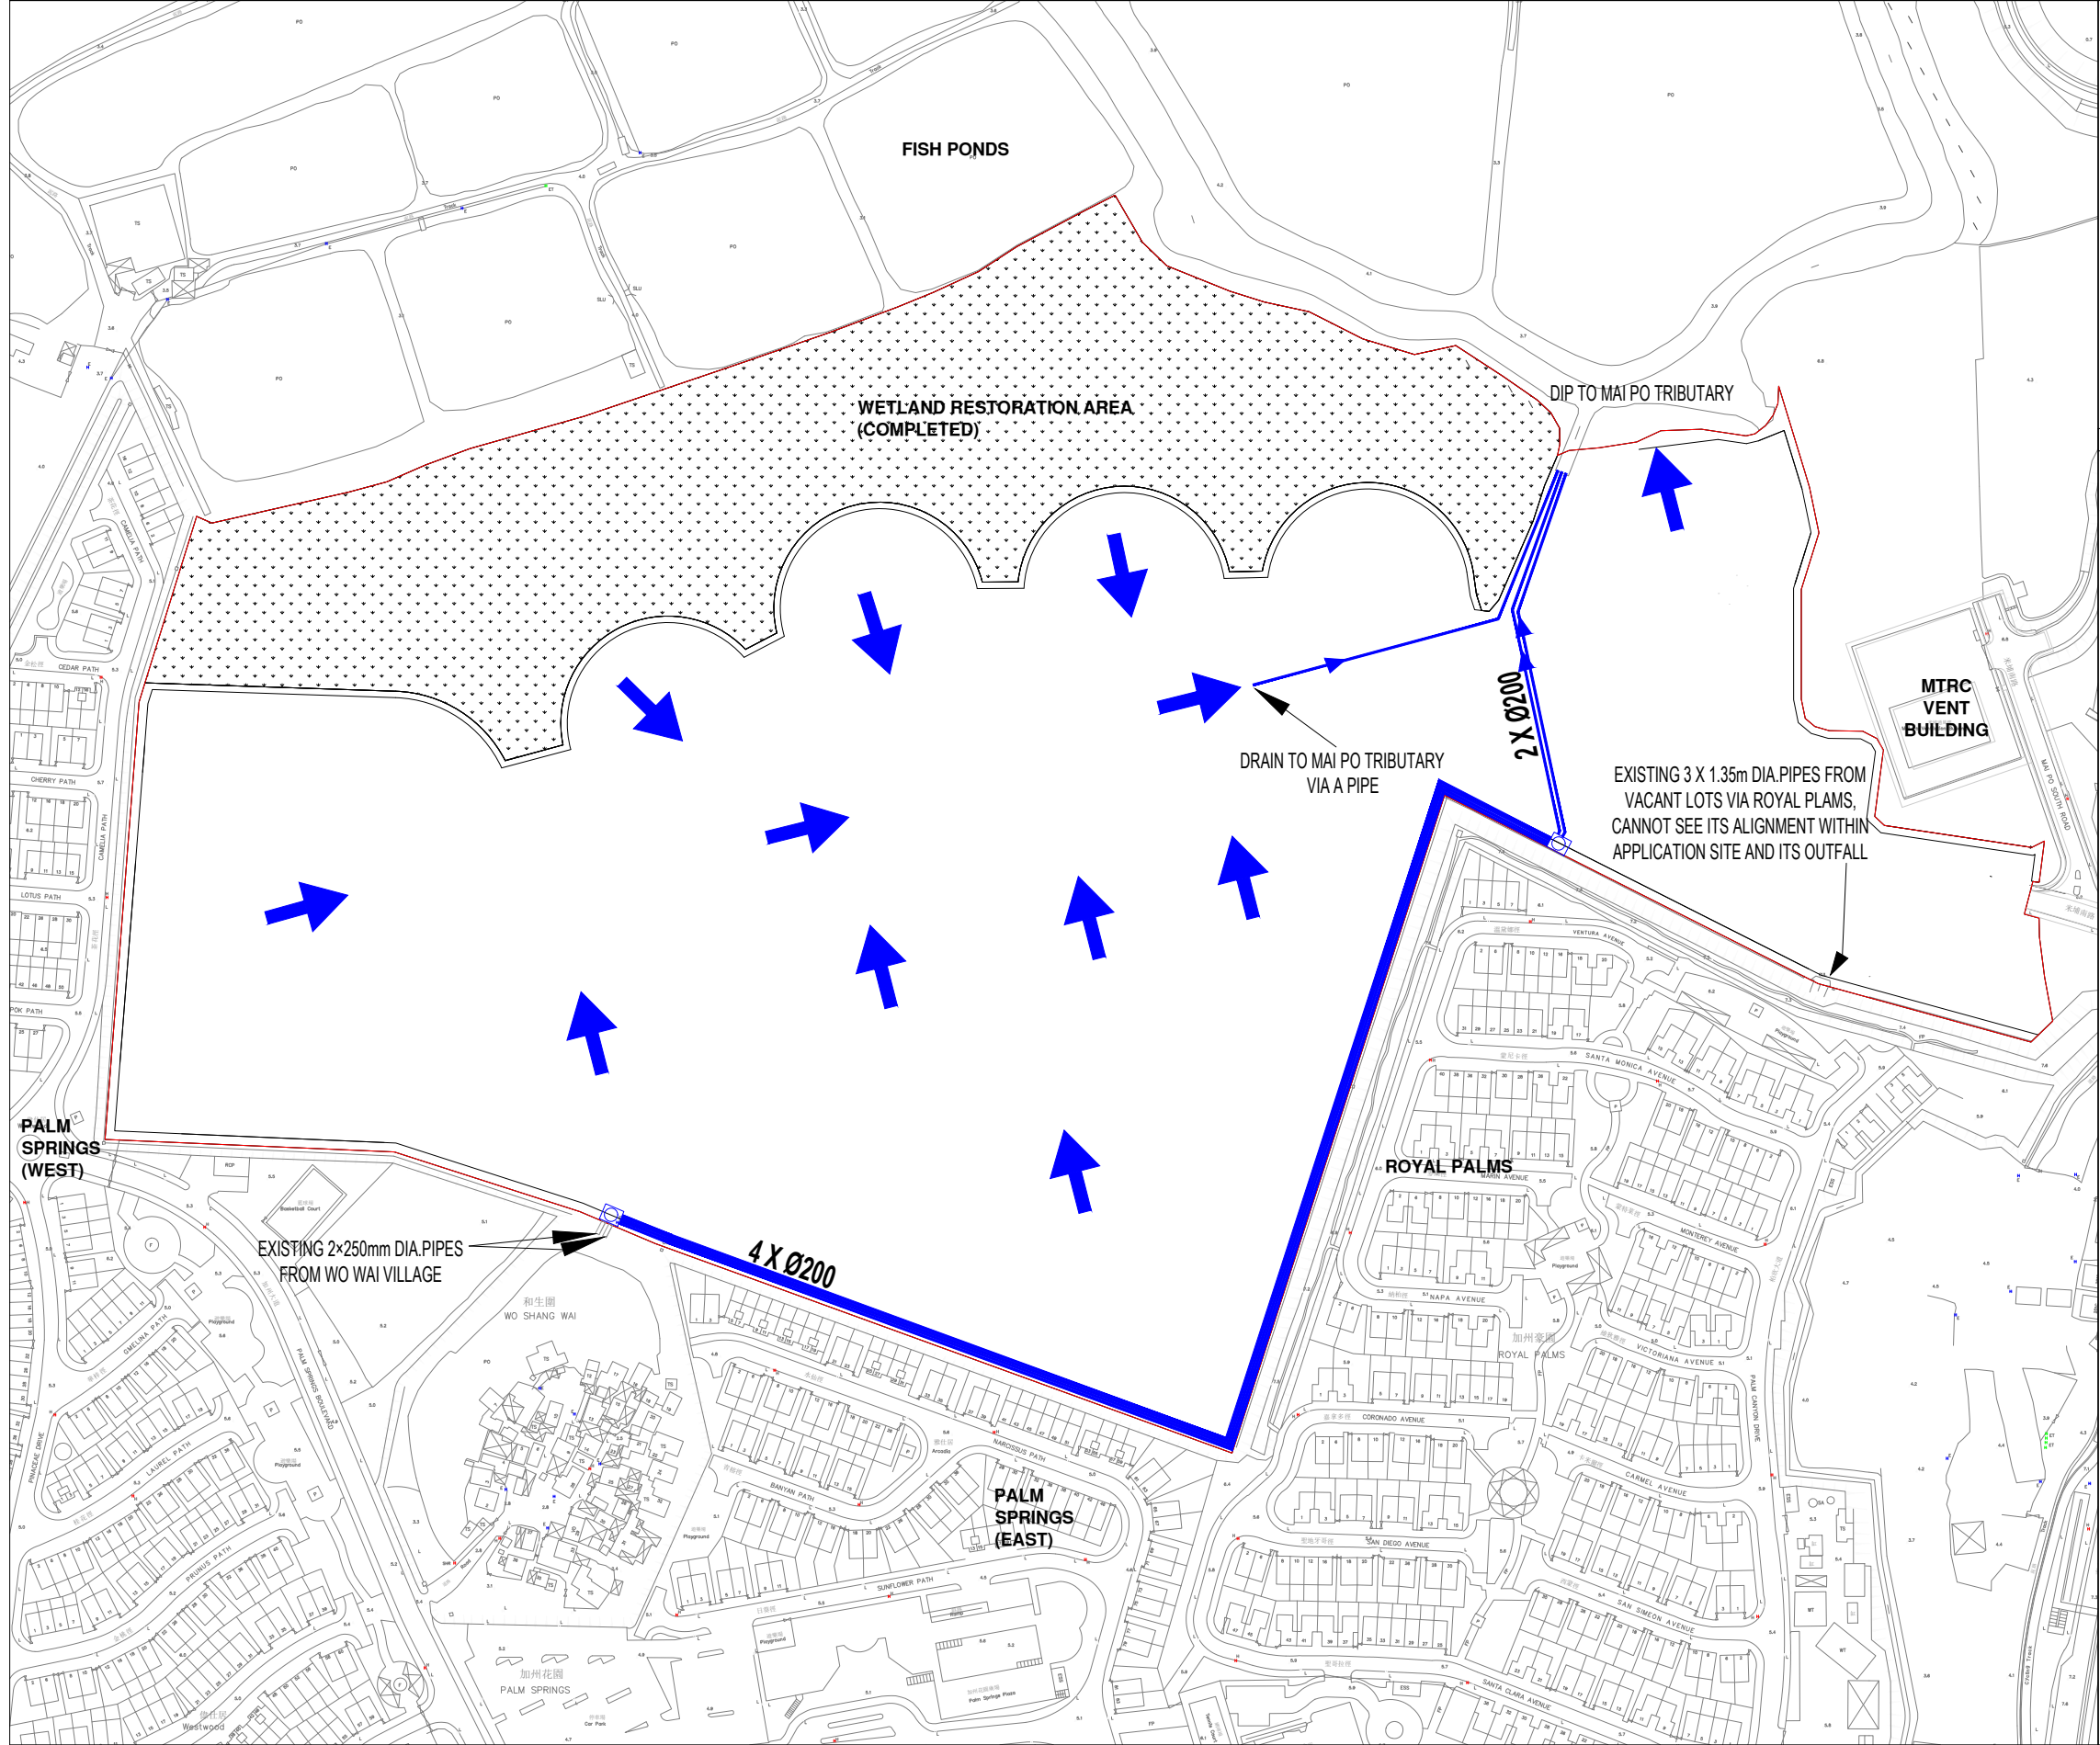
© COPYRIGHT RESERVED




LOCATION PLAN

LEGENDS:

-  APPLICATION SITE BOUNDARY
-  FLOW DIRECTION
-  EXISTING PIPES

| | | | |
|---|---|-----------|------------|
| Rev | Description | By | Date |
| Consultant |  | | |
| Project title | | | |
| DRAINAGE IMPACT ASSESSMENT | | | |
| To Amend the Notes of the "Comprehensive Development to include Wetland Restoration Area" Zone for a Proposed Comprehensive Development at Wo Shang Wai, Yuen Long, Lots 77 and 50 S.A in DD101 | | | |
| Drawing title | | | |
| EXISTING DRAINAGE | | | |
| Drawing no. Figure 3 | | | Rev. — |
| Drawn JX | Date APRIL 2025 | Checked — | Approved — |
| Scale 1:3000 | Status | | |

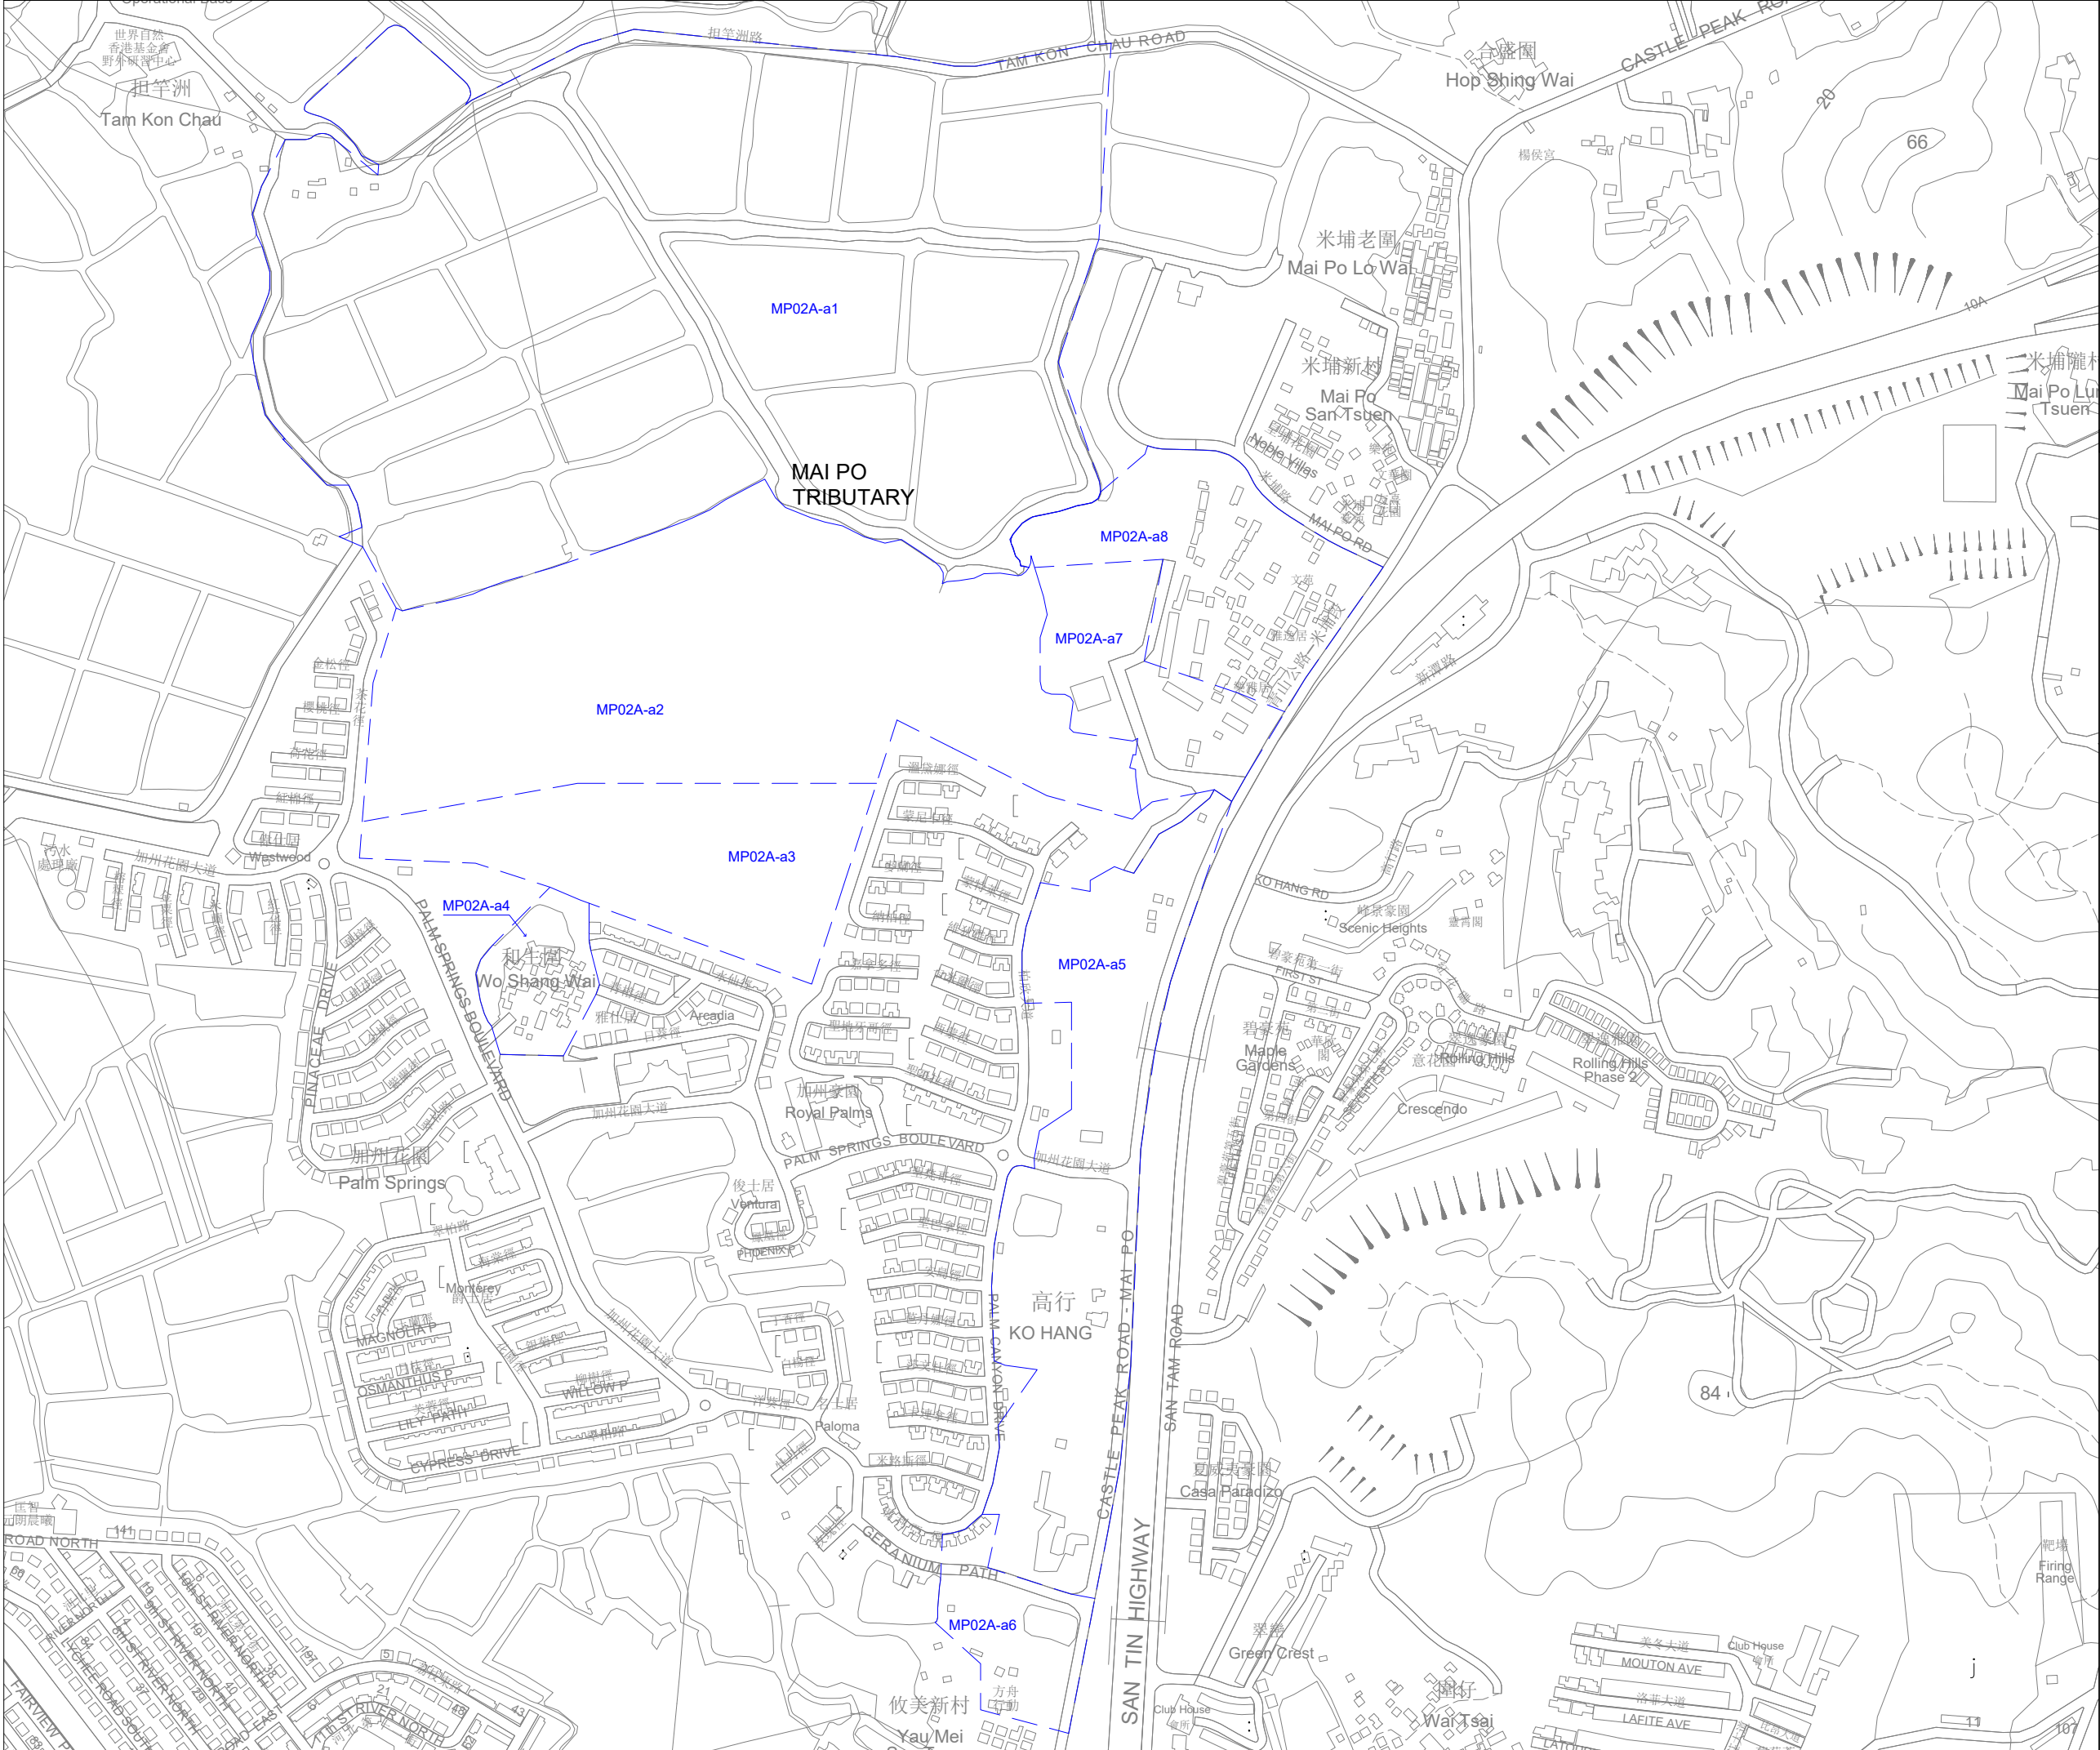


LOCATION PLAN

LEGENDS:

SUB-CATCHMENT BOUNDARY

| | | | |
|---|-------------|---------|----------|
| Rev | Description | By | Date |
| Consultant | | | |
| Project title | | | |
| DRAINAGE IMPACT ASSESSMENT | | | |
| To Amend the Notes of the "Comprehensive Development to include Wetland Restoration Area" Zone for a Proposed Comprehensive Development at Wo Shang Wai, Yuen Long, Lots 77 and 50 S.A in DD101 | | | |
| Drawing title | | | |
| SUB-CATCHMENT PLAN OF MP02A-a FOR PRE-DEVELOPMENT MODEL | | | |
| Drawing no. | | Rev. | |
| Figure 4 | | 0 | |
| Drawn | Date | Checked | Approved |
| JX | AUG2024 | - | - |
| Scale | 1:3000 | Status | |

© COPYRIGHT RESERVED

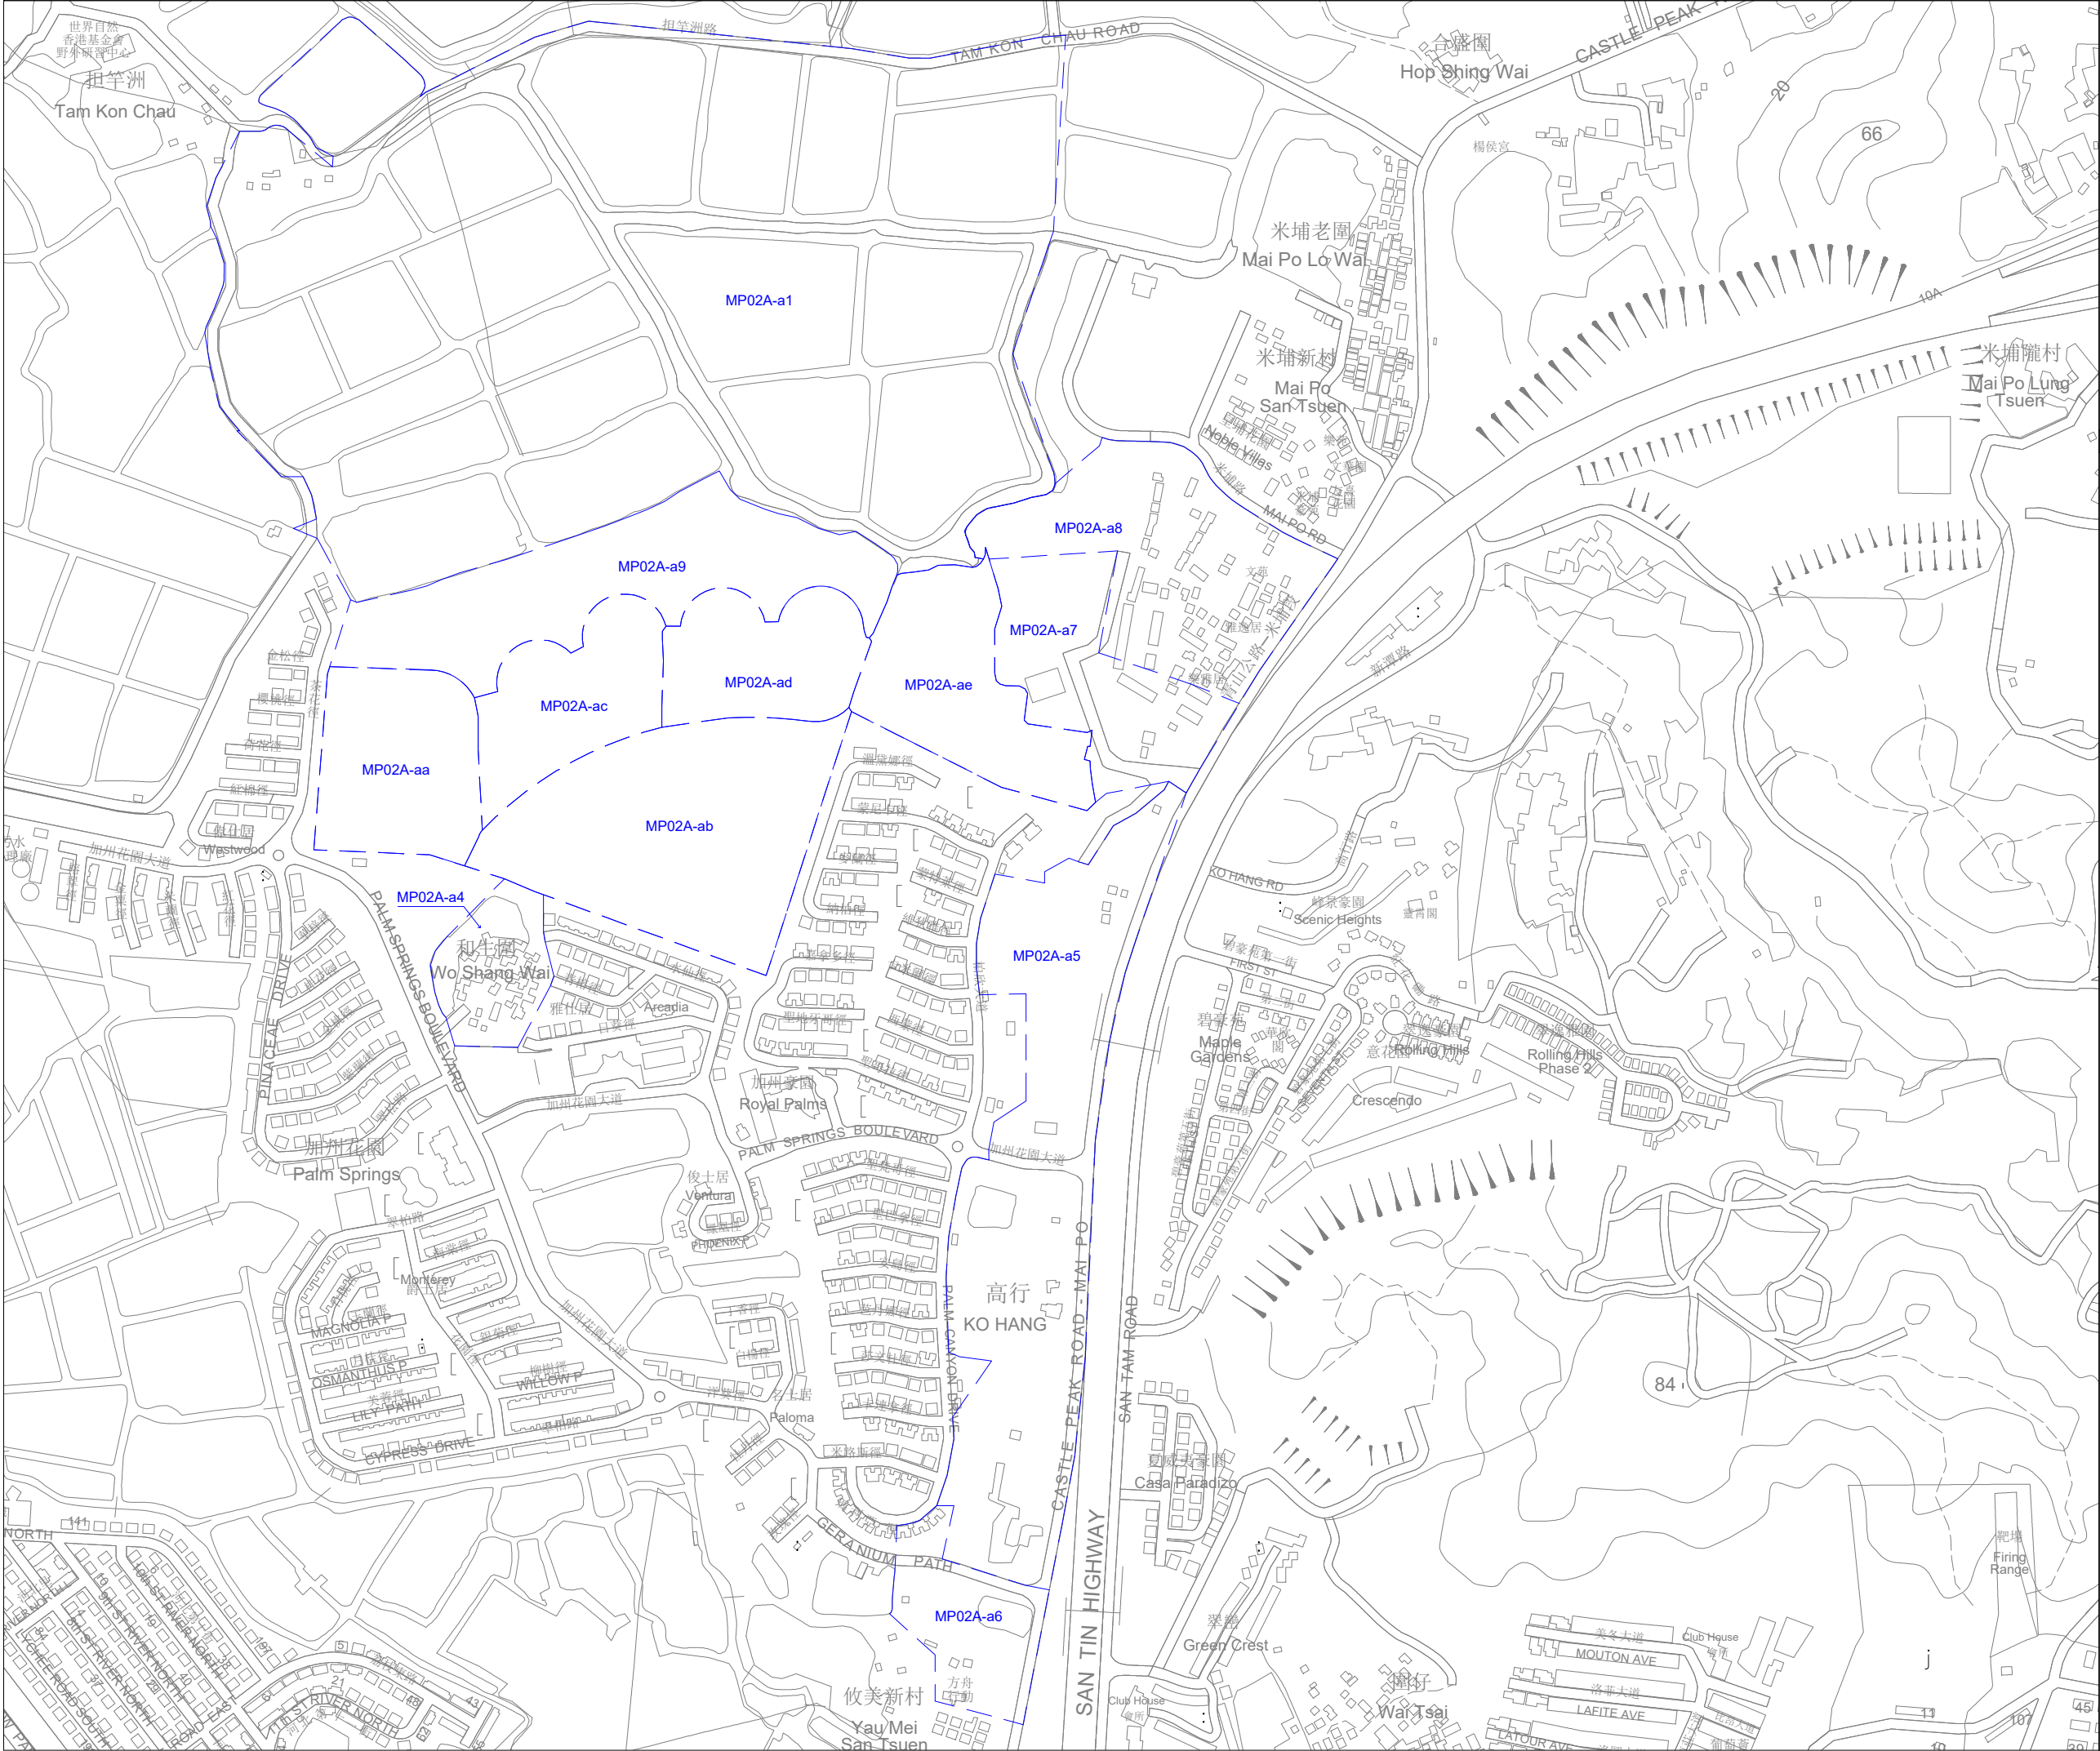

N

LOCATION PLAN

LEGENDS:

SUB-CATCHMENT BOUNDARY

| | | | |
|---|-------------|---------|----------|
| Rev | Description | By | Date |
| Consultant | | | |
| | | | |
| Project title | | | |
| DRAINAGE IMPACT ASSESSMENT | | | |
| To Amend the Notes of the "Comprehensive Development to include Wetland Restoration Area" Zone for a Proposed Comprehensive Development at Wo Shing Wai, Yuen Long, Lots 77 and 50 S.A in DD101 | | | |
| Drawing title | | | |
| SUB-CATCHMENT PLAN OF MP02A-a FOR POST-DEVELOPMENT MODEL | | | |
| Drawing no. | | Rev. | |
| Figure 5 | | - | |
| Drawn | Date | Checked | Approved |
| JX | - | - | - |
| Scale | 1:3000 | Status | |

© COPYRIGHT RESERVED

Appendices

Appendix A

Approval Letters of Previous DIAs in 2015, 2021 and 2024

規 劃 署

粉嶺、上水及元朗東規劃處
新界沙田上禾輦路 1 號
沙田政府合署 12 樓



By Post and Fax (2587 7068)
Planning Department

Fanling, Sheung Shui &
Yuen Long East
District Planning Office
12/F., Sha Tin Government Offices,
1 Sheung Wo Che Road, Sha Tin, N.T.

本函檔號 Your Reference
本署檔號 Our Reference () in TPB/A/YL-MP/229
電話號碼 Tel. No. : 2158 6284
傳真機號碼 Fax No. : 3105 0057

17 December 2015

Masterplan Limited
Room 3516B, 35/F
China Merchants Tower, Shun Tak Centre
200 Connaught Road Central
Hong Kong
(Attn.: Mr. Ian Brownlee)

Dear Sir,

Planning Application No. A/YL-MP/229
Compliance with Approval Condition (d)

I refer to your submissions dated 13.4.2015, 6.7.2015 and 10.7.2015 for compliance with the approval condition (d) of the captioned application on “the submission of a revised Drainage Impact Assessment (DIA), including flood relief mitigation measures, to the satisfaction of the Director of Drainage Services or of the Town Planning Board”. The relevant departments have been consulted on your submission. Your submission is considered:

- ☒ Acceptable. The captioned condition **has been complied with**. Please find detailed comments of the Chief Engineer/Mainland North, Drainage Services Department (CE/MN, DSD), District Lands Officer/Yuen Long, Lands Department (DLO/YL, LandsD), Director of Agriculture, Fisheries and Conservation (DAFC) and Director of Environmental Protection (DEP) at **Appendix**.
- ☐ Acceptable. Since the captioned condition requires both the submission and implementation of the proposal, it **has not been fully complied with**. Please proceed to implement the accepted proposal for full compliance with the approval condition.
- ☐ Not acceptable. The captioned condition **has not been complied with**.

Should you have any queries on the comments, please contact Mr. Simon CHEUNG (Tel: 2158 6289) direct.

Yours faithfully,

(K.T. NG)

for District Planning Officer/
Fanling, Sheung Shui and Yuen Long East
Planning Department

Encl.

城市規劃委員會

香港北角渣華道三百三十三號
北角政府合署十五樓

TOWN PLANNING BOARD

15/F., North Point Government Offices
333 Java Road, North Point,
Hong Kong.

傳 真 Fax: 2877 0245 / 2522 8426

電 話 Tel: 2231 4810

來函檔號 Your Reference:

覆函請註明本會檔號

In reply please quote this ref.: TPB/A/YL-MP/229

By Registered Post & Fax (2587 7068)

13 March 2015

Masterplan Ltd.
Rm 3516B, 35/F, China Merchants Tower
Shun Tak Centre
200 Connaught Road Central
Hong Kong
(Attn.: I.T. Brownlee)

Dear Sir/Madam,

**Proposed Filling and Excavation of Land for House
Development with Wetland Habitat in "Other Specified Uses" annotated
"Comprehensive Development to include Wetland Restoration Area" zone,
Lots No. 43 S.A RP, 50 S.A and 50 RP in D.D. 101, Wo Shang Wai, Mai Po, Yuen Long**

I refer to my letter to you dated 20.1.2015.

After giving consideration to the application, the Town Planning Board (the TPB) approved the application for permission under section 16 of the Town Planning Ordinance on the terms of the application as submitted to the TPB. The permission shall be valid until 27.2.2019; and after the said date, the permission shall cease to have effect unless before the said date, the development permitted is commenced or the permission is renewed. The permission is subject to the following conditions :

- (a) the submission and implementation of a revised Master Layout Plan to take into account conditions (b) to (q) below to the satisfaction of the Director of Planning or of the TPB;
- (b) the interface arrangement for the Express Rail Link (XRL) project in terms of the permanent land take for Express Rail Link tunnels and structures and temporary land take for related construction to the satisfaction of the Director of Highways or of the TPB;
- (c) the submission and implementation of a revised Landscape Master Plan including a tree preservation proposal to the satisfaction of the Director of Planning or of the TPB;
- (d) the submission of a revised Drainage Impact Assessment (DIA), including flood relief mitigation measures, to the satisfaction of the Director of Drainage Services or of the TPB;
- (e) in relation to (d) above, the implementation of a drainage proposal and other necessary flood relief mitigation measures identified in the revised DIA to the satisfaction of the Director of Drainage Services or of the TPB;

- 2 -

- (f) the implementation of mitigation measures identified therein in the revised Ecological Impact Assessment to the satisfaction of the Director of Agriculture, Fisheries and Conservation or of the TPB;
- (g) the submission and implementation of a maintenance and management plan which covers implementation details and the estimated annual recurrent costs with breakdown required for maintaining the restored wetland area to the satisfaction of the Director of Agriculture, Fisheries and Conservation or of the TPB;
- (h) the submission and implementation of a funding arrangement proposal for ensuring the long-term maintenance and management of the restored wetland area to the satisfaction of the Director of Environmental Protection and the Director of Agriculture, Fisheries and Conservation, or of the TPB;
- (i) as proposed by you, land exchange and/or lease modification for the proposed development if considered and approved by the Director of Lands, should not be executed prior to the compliance with condition (h) to the satisfaction of the Director of Environmental Protection and the Director of Agriculture, Fisheries and Conservation, or of the TPB;
- (j) the design and provision of improvement measures at the junction of Palm Springs Boulevard and Castle Peak Road – Mai Po section to the satisfaction of the Commissioner for Transport or of the TPB;
- (k) the design and provision of vehicle parking, motorcycle parking and loading/unloading facilities for the proposed development to the satisfaction of the Commissioner for Transport or of the TPB;
- (l) the design and provision of the access connection between the development and the public road to the satisfaction of the Commissioner for Transport or of the TPB;
- (m) the provision of emergency vehicular access, water supplies for fire-fighting and fire service installations to the satisfaction of the Director of Fire Services or of the TPB;
- (n) the design and provision of mitigation measures to alleviate the visual impact of the noise barriers to the satisfaction of the Director of Planning or of the TPB;
- (o) the submission of a revised Sewerage Impact Assessment (SIA) to the satisfaction of the Director of Environmental Protection or of the TPB;
- (p) the implementation of mitigation measures identified in the revised SIA to the satisfaction of the Director of Environmental Protection or of the TPB; and
- (q) the implementation of sewage disposal arrangement including the interim on-site sewerage treatment plant, the reuse of treated effluent and the irrigation system, as proposed by you, to the satisfaction of the Director of Environmental Protection or of the TPB.

The TPB also agreed to advise you of the following:

- (a) to note the suggestion of Members on the provision of a tree belt at the interface of the development portion and the wetland restoration area of the scheme to create a buffer area in between. As part of the Landscape Master Plan, you should liaise with the Planning Department regarding the design and implementation of the tree belt;
- (b) the approval of the application does not imply that the proposed building design elements can fulfil the requirements under the Sustainable Building Design Guidelines and the relevant requirements under the lease, and that the proposed gross floor area (GFA) concession for the proposed development will be approved/granted by the Building Authority (BA). You should approach the Buildings Department (BD) and the Lands Department (LandsD) direct to obtain the necessary approval. If the building design elements and the GFA concession are not approved/granted by the BA and the Lands Authority and major changes to the current scheme are required, a fresh planning application to the TPB may be required;
- (c) to note the comments of the District Lands Officer/Yuen Long, LandsD that with reference to Figure A3 of the Wetland Restoration and Creation Scheme, the Wetland Restoration Area boundary is modified. A proposed land exchange is being processed for the lots within the site based on the previous Application No. A/YL-MP/185. Should the TPB approve the application which cause amendments to the proposed land exchange, you are required to apply to LandsD for the proposed development in current scheme. However, there is no guarantee that such application (including the granting of any additional government land (GL)) will be approved. Such application will be dealt with by his department acting in the capacity as the landlord at his discretion, and if it is approved under such discretion, the approval would be subject to such terms and conditions including among others, the payment of premium and administrative fee as may be imposed by his department. The proposed storm water drain will connect to outfall beyond the site boundary. Should such drains encroach upon private land and GL, you should clearly indicate the whole alignment of such storm water drain connection, in particular the one connecting the existing outfall to Mai Po Tributary, and then obtain prior approval/consent from the relevant authorities before carrying out of the works. According to the layout plan of the preliminary interim sewage system design, there is no GL involved. However, you should consult his department if there is any works to be carried out on GL, if unavoidable;
- (d) to note the comments of the Director of Environmental Protection (DEP) that this is a revised residential development scheme different from the layout shown in the Environmental Permit No. EP-311/2008/D issued under the Environmental Impact Assessment Ordinance (EIAO) (Cap. 499). The proposed on-site wastewater treatment does not conform with Condition 5.13 of the Environmental Permit. You should be reminded to go through the statutory EIAO process should the current development scheme goes ahead;

- (e) to note the comments of the Commissioner for Transport that you should take account of the segregation of vehicles and pedestrian in the detailed design during submission of the general building plan stage. He has no objection to the proposed basement carpark but the Transport Department's comment will be provided at the detailed design stage;
- (f) to note the comments of the Chief Engineer/Railway Development, Railway Development Office, Highways Department that the site, in particular the site portion within Lot 43 S.A RP in D.D. 101, falls within the railway protection boundary of the Hong Kong Section of the XRL, which is now under construction. You should consult MTR Corporation Limited on the full details of the proposal and comply with their requirements with respect to the construction, operation, maintenance and safety of the XRL;
- (g) to note the comments of the Chief Building Surveyor/New Territories West, BD that the access road linking the site and the Castle Peak Road shall be completed before the Occupation Permit application. In view of the size of the site, any internal streets/roads required under the Buildings Ordinance (BO) s.16(1)(p) may have to be deducted from site area for plot ratio/site coverage calculations under the BO. Recreational facilities and the proposed noise barriers, unless exempted, are accountable for GFA calculation under the BO. Filtration plant rooms for swimming pool at private houses are accountable for GFA calculation under the BO. Each phase of the proposed development should be self-sustainable under the BO. Your attention is drawn to the requirements on the provision of emergency vehicle access to all buildings to be erected on the site under Building (Planning) Regulations (B(P)R) 41D. The proposed open space should not be less than the requirements as stipulated in the second schedule of B(P)R. Application for exemption of carparking spaces from GFA calculation under the BO will be considered on the basis of the PNAP APP-2 during plan submission stage. The new quality and sustainable built environment (QBE) requirements are applicable to the site. In accordance with the Government's committed policy to implement building design to foster a QBE, the sustainable building design requirements (including building separation, building setback and greenery coverage) should be included, where possible, in the planning approval;
- (h) to note the comments of the Chief Engineer/Mainland North, Drainage Services Department that he would reserve his comments until specific drainage proposal is submitted. You should be reminded that the SIA for the current application needs to meet the full satisfaction of DEP;
- (i) to note the comments of the Chief Town Planner/Urban Design and Landscape, Planning Department (PlanD) that regarding communal open space calculation, you should be advised that the ancillary pedestrian route should be "within" the open space to be counted as part of the open space as per the Hong Kong Planning Standards and Guidelines (HKPSG). You should maximize the provision of greening, especially at-grade tree and shrub planting along roadside and clubhouses to improve the landscape and visual amenity of the development;

- 5 -

- (j) to note the comments of the Chief Engineer/Development (2), Water Supplies Department (WSD) that for the provision of water supply to the development, you may need to extend your inside services to the nearest suitable government water mains for connection. You shall resolve any land matter (such as private lots) associated with the provision of water supply and shall be responsible for the construction, operation and maintenance of the inside services within the private lots to WSD's standard. Fresh water from government mains shall not be used for watering plant nurseries or landscape features purposes except with the written consent of the Water Authority. Consent to use fresh water from the mains for such purposes may be given on concessionary supply basis if an alternative supply is impracticable and evidence to that effect is offered to and accepted by the Water Authority. Such permission will be withdrawn if in the opinion of the Water Authority the supply situation requires it; and
- (k) to note the comments of the Director of Electrical and Mechanical Services that for electricity safety, you shall approach the electricity supplier for the requisition of cable plans to find out whether there is any underground cable (and/or overhead line) within or in the vicinity of the site. For the site within the preferred working corridor of high voltage overhead lines at transmission voltage level 132kV and above as stipulated in the HKPSG published by PlanD, prior consultation and arrangement with the electricity supplier is necessary. Prior to establishing any structure within the site, you and/or your contractors shall liaise with the electricity supplier and, if necessary, ask the electricity supplier to divert the underground cable (and/or overhead line) away from the vicinity of the proposed structure. The "Code of Practice on Working near Electricity Supply Lines" established under the Electricity Supply Lines (Protection) Regulation shall be observed by you and your contractors when carrying out works in the vicinity of the electricity supply lines. For town gas safety, there is a high pressure town gas pipeline running along San Tin Highway and the site is in close proximity to the existing high pressure gas pipeline. He considers that given the application is a low density residential development (i.e. plot ratio is 0.4) and the minimum proximity distance of the proposed houses to the concerned gas pipeline is about 150m, it should not be a mandatory requirement for you to submit a risk assessment. Nevertheless, given that there is a town gas pipeline near to the proposed development, the project proponent should maintain liaison/coordination with the Hong Kong and China Gas Company Limited in respect of the exact location of existing or planned gas pipe routes/gas installations in the vicinity of the proposed works area and the minimum setback distance away from the gas pipes/gas installations if any excavation work is required during the design and construction stages of the development. The project proponent shall also note the requirements of the Electrical and Mechanical Services Department's 'Code of Practice on Avoiding Danger from Gas Pipes'.

If you wish to seek an extension of the validity of this permission, you may submit an application to the TPB for renewal of the permission no less than six weeks before its expiry. This is to allow sufficient time for processing of the application in consultation with the concerned departments. The TPB will not consider any application for renewal of permission if the time limit for commencement of development specified in the permission has already

- 6 -

expired at the time of consideration by the TPB. Please refer to the TPB Guidelines No. 35B and 36A for details. The Guidelines and application forms are available at the TPB's website (www.info.gov.hk/tpb/), the Planning Enquiry Counters of the Planning Department (Hotline : 2231 5000) at 17/F, North Point Government Offices, 333 Java Road, North Point; 14/F, Sha Tin Government Offices, 1 Sheung Wo Che Road, Sha Tin; and the Secretariat of the TPB at 15/F, North Point Government Offices.

For amendments to the approved scheme that may be permitted with or without application under section 16A, please refer to TPB Guidelines No. 36A for details.


A copy of the TPB Paper in respect of the application (except the supplementary planning statement/technical report(s), if any) and the relevant extract of minutes of the TPB meeting held on 27.2.2015 are enclosed herewith for your reference.

Under section 17(1) of the Town Planning Ordinance, an applicant aggrieved by a decision of the TPB may apply to the TPB for a review of the decision. If you wish to seek a review, you should inform me within 21 days from the date of this letter (on or before 8.4.2015). I will then contact you to arrange a hearing before the TPB which you and/or your authorized representative will be invited to attend. The TPB is required to consider a review application within three months of receipt of the application for review. Please note that any review application will be published for three weeks for public comments.

This permission by the TPB under section 16 of the Town Planning Ordinance should not be taken to indicate that any other government approval which may be needed in connection with the development, will be given. You should approach the appropriate government departments on any such matter.

If you have any queries regarding this planning permission, please contact Mr. K.T. Ng of Fanling, Sheung Shui & Yuen Long East District Planning Office at 2158 6284. In case you wish to consult the relevant Government departments on matters relating to the above approval conditions, a list of the concerned Government officers is attached herewith for your reference.

Yours faithfully,



(Michael CHIU)

for Secretary, Town Planning Board

規 劃 署

粉嶺、上水及元朗東規劃處
新界荃灣青山公路 388 號
中染大廈 22 樓 2202 室



By Fax (2587 7068) and Post
Planning Department

Fanling, Sheung Shui &
Yuen Long East
District Planning Office
Unit 2202, 22/F, CDW Building,
388 Castle Peak Road, Tsuen Wan, N.T.

本函檔號 Your Reference
本署檔號 Our Reference () in TPB/A/YL-MP/291
電話號碼 Tel. No.: 3168 4072
傳真機號碼 Fax No.: 3168 4074

12 May 2021

Masterplan Limited
Room 3516B, 35/F, China Merchants Tower
Shun Tak Centre, 200 Connaught Road Central
Hong Kong
(Attn: Mr. Ian BROWNLEE)

Dear Mr. BROWNLEE,

**Proposed Comprehensive House and Wetland Habitat Development with Filling and
Excavation of Land (Amendments to an Approved Scheme) in "Other Specified Uses"
annotated "Comprehensive Development to include Wetland Restoration Area" zone,
Lots 43 S.A RP, 50 S.A and 50 RP in D.D.101, Wo Shang Wai, Mai Po, Yuen Long
(Planning Application No. A/YL-MP/291)
Compliance with Approval Condition (c)**

I refer to your submission dated 27.4.2021 for compliance with the captioned approval condition regarding the submission of a revised Drainage Impact Assessment (DIA). The relevant department has been consulted on your submission. Your submission is considered:

- ☐ Acceptable. The captioned condition has been complied with.
- ☒ Acceptable. Since the captioned condition requires both the submission and implementation of the proposal, it has not been fully complied with. Please proceed to implement and maintain the flood mitigation measures and provision of drainage facilities identified in the DIA for full compliance with the approval condition.
- ☐ Not acceptable. The captioned condition has not been complied with.

Should you have any queries on the comments, please contact Mr. Joshua YUEN (Tel: 2300 1235) of DSD directly.

Yours sincerely,


(Anthony LUK)

District Planning Officer/
Fanling, Sheung Shui and Yuen Long East
Planning Department

- 2 -

c.c.

CE/MN, DSD
CTP/TPB(2)

(Attn: Mr. Joshua YUEN)

Internal

Site Record

AL/AC/AP

城市規劃委員會

香港北角渣華道三百三十三號
北角政府合署十五樓

TOWN PLANNING BOARD

15/F., North Point Government Offices
333 Java Road, North Point,
Hong Kong.

傳 真 Fax: 2877 0245 / 2522 8426

電 話 Tel: 2231 4810

來函檔號 Your Reference:

覆函請註明本會檔號

In reply please quote this ref.: TPB/A/YL-MP/344

By Post & Fax (2587 7068)

1 March 2024

Masterplan Ltd.
Room 3516B, 35/F, China Merchants Tower
Shun Tak Centre
200 Connaught Road Central
Hong Kong
(Attn.: Benson Poon)

Dear Sir/Madam,

**Proposed Comprehensive House and Wetland Habitat Development with Filling and
Excavation of Land (Amendments to an Approved Scheme) in "Other Specified Uses"
annotated "Comprehensive Development to include Wetland Restoration Area" Zone,
Lots 50 S.A and 77 in D.D.101, Wo Shang Wai, Mai Po, Yuen Long**

I refer to my letter to you dated 15.2.2024.

After giving consideration to the application, the Town Planning Board (TPB) approved the application for permission under section 16 of the Town Planning Ordinance on the terms of the application as submitted to the TPB. The permission shall be valid until 16.2.2028, and after the said date, the permission shall cease to have effect unless before the said date, the development permitted is commenced or the permission is renewed. The permission is subject to the following conditions :

- (a) the submission and implementation of a revised Master Layout Plan to take into account conditions (b) to (i) below to the satisfaction of the Director of Planning or of the TPB;
- (b) the submission and implementation of a Landscape Master Plan to the satisfaction of the Director of Planning or of the TPB;
- (c) the implementation of drainage proposal identified in the accepted Drainage Impact Assessment to the satisfaction of the Director of Drainage Services or of the TPB;
- (d) the implementation of the mitigation measures identified in the Ecological Impact Assessment to the satisfaction of the Director of Agriculture, Fisheries and Conservation or of the TPB;
- (e) the design and provision of vehicular access, parking and loading/unloading facilities for the proposed development to the satisfaction of the Commissioner for Transport or of the TPB;

- (f) the design and provision of improvement measures at the junction of Castle Peak Road - San Tin and Shek Wu Wai Road before the occupation of the proposed development to the satisfaction of the Commissioner for Transport or of the TPB;
- (g) the design and provision of improvement measures at the junction of Fairview Park Interchange, if deemed required by Transport Department, before the occupation of the proposed development to the satisfaction of the Commissioner for Transport or of the TPB;
- (h) the submission of a revised Sewerage Impact Assessment (SIA) to the satisfaction of the Director of Environmental Protection or of the TPB; and
- (i) the implementation of sewage disposal arrangement identified in the revised SIA including the on-site sewerage treatment plant and the reuse of treated effluent, as proposed by you, to the satisfaction of the Director of Environmental Protection or of the TPB.

The TPB also agreed to advise you to note the advisory clauses as set out at the Appendix attached.

Regarding the determination on commencement of an approved development, please refer to TPB Guidelines No. 35D for details. If you wish to seek an extension of the validity of this permission, you may submit an application under 16A of the Town Planning Ordinance to the TPB no less than six weeks before its expiry. This is to allow sufficient time for processing of the application in consultation with the concerned departments. The TPB will not consider the application if the time limit for commencement of development specified in the permission has already expired at the time of consideration by the TPB. Please refer to the TPB Guidelines No. 35D and 36C for details. The Guidelines and application forms are available at the TPB's website (<https://www.tpb.gov.hk/en/resources/index.html>), the Planning Enquiry Counters of the Planning Department (Hotline : 2231 5000) at 17/F, North Point Government Offices, 333 Java Road, North Point; 14/F, Sha Tin Government Offices, 1 Sheung Wo Che Road, Sha Tin; and the Secretariat of the TPB at 15/F, North Point Government Offices.

For amendments to the approved development that may be permitted with or without application under section 16A, please refer to TPB Guidelines No. 36C for details.

The TPB Paper in respect of the application (except the supplementary planning statement/technical report(s), if any) is available at this link (https://www.tpb.gov.hk/en/meetings/RNTPC/Agenda/736_rnt_agenda.html) and the relevant extract of minutes of the TPB meeting held on 16.2.2024 is enclosed herewith for your reference.

Under section 17(1) of the Town Planning Ordinance, an applicant aggrieved by a decision of the TPB may apply to the TPB for a review of the decision. If you wish to seek a review, you should inform me within 21 days from the date of this letter (on or before 22.3.2024). I will then contact you to arrange a hearing before the TPB which you and/or your authorized representative will be invited to attend. The TPB is required to consider a review application within three months of receipt of the application for review. Please note that any review application will be published for three weeks for public comments.

This permission by the TPB under section 16 of the Town Planning Ordinance should not be taken to indicate that any other government approval which may be needed in connection with the development, will be given. You should approach the appropriate government departments on any such matter.

If you have any queries regarding this planning permission, please contact Mr. Kimson Chiu of Fanling, Sheung Shui & Yuen Long East District Planning Office at 3168 4033. In case you wish to consult the relevant Government departments on matters relating to the above approval conditions, a list of the concerned Government officers is attached herewith for your reference.

Yours faithfully,



(Leticia LEUNG)
for Secretary, Town Planning Board

List of Government Department Contacts

(Application No. A/YL-MP/344)

| 部門 Department | 辦事處 Office | 聯絡人姓名 Name of Contact Person | 電話號碼 Telephone No. | 傳真號碼 Facsimile No. |
|--|---|--|--------------------------|--------------------------|
| 漁農自然護理署 Agriculture, Fisheries and Conservation Department | 自然護理組(元朗) Nature Conservation Section (Yuen Long) | 黃金欣博士 Dr. WONG Kam Yan, Azaria | 2150 6932 | 2377 4427 |
| 渠務署 Drainage Services Department | 新界北渠務部 Mainland North Division | 梁長政先生 Mr. LEONG Cheung Ching | 2300 1432 | 2770 4761 |
| 環境保護署 Environmental Protection Department | 環境評估科 Environmental Assessment Division | 陳麗薇女士 Ms. CHAN Lai Mei, Jolitta | 2835 1112 | 2591 0558 |
| 運輸署 Transport Department | 交通工程(新界西)部 Traffic Engineering (NTW) Division | 梁志江先生 Mr. LEUNG Chi Kong, Donald | 2399 2778 | 2381 3799 |

Appendix B

Master Layout Plan of the Proposed Development

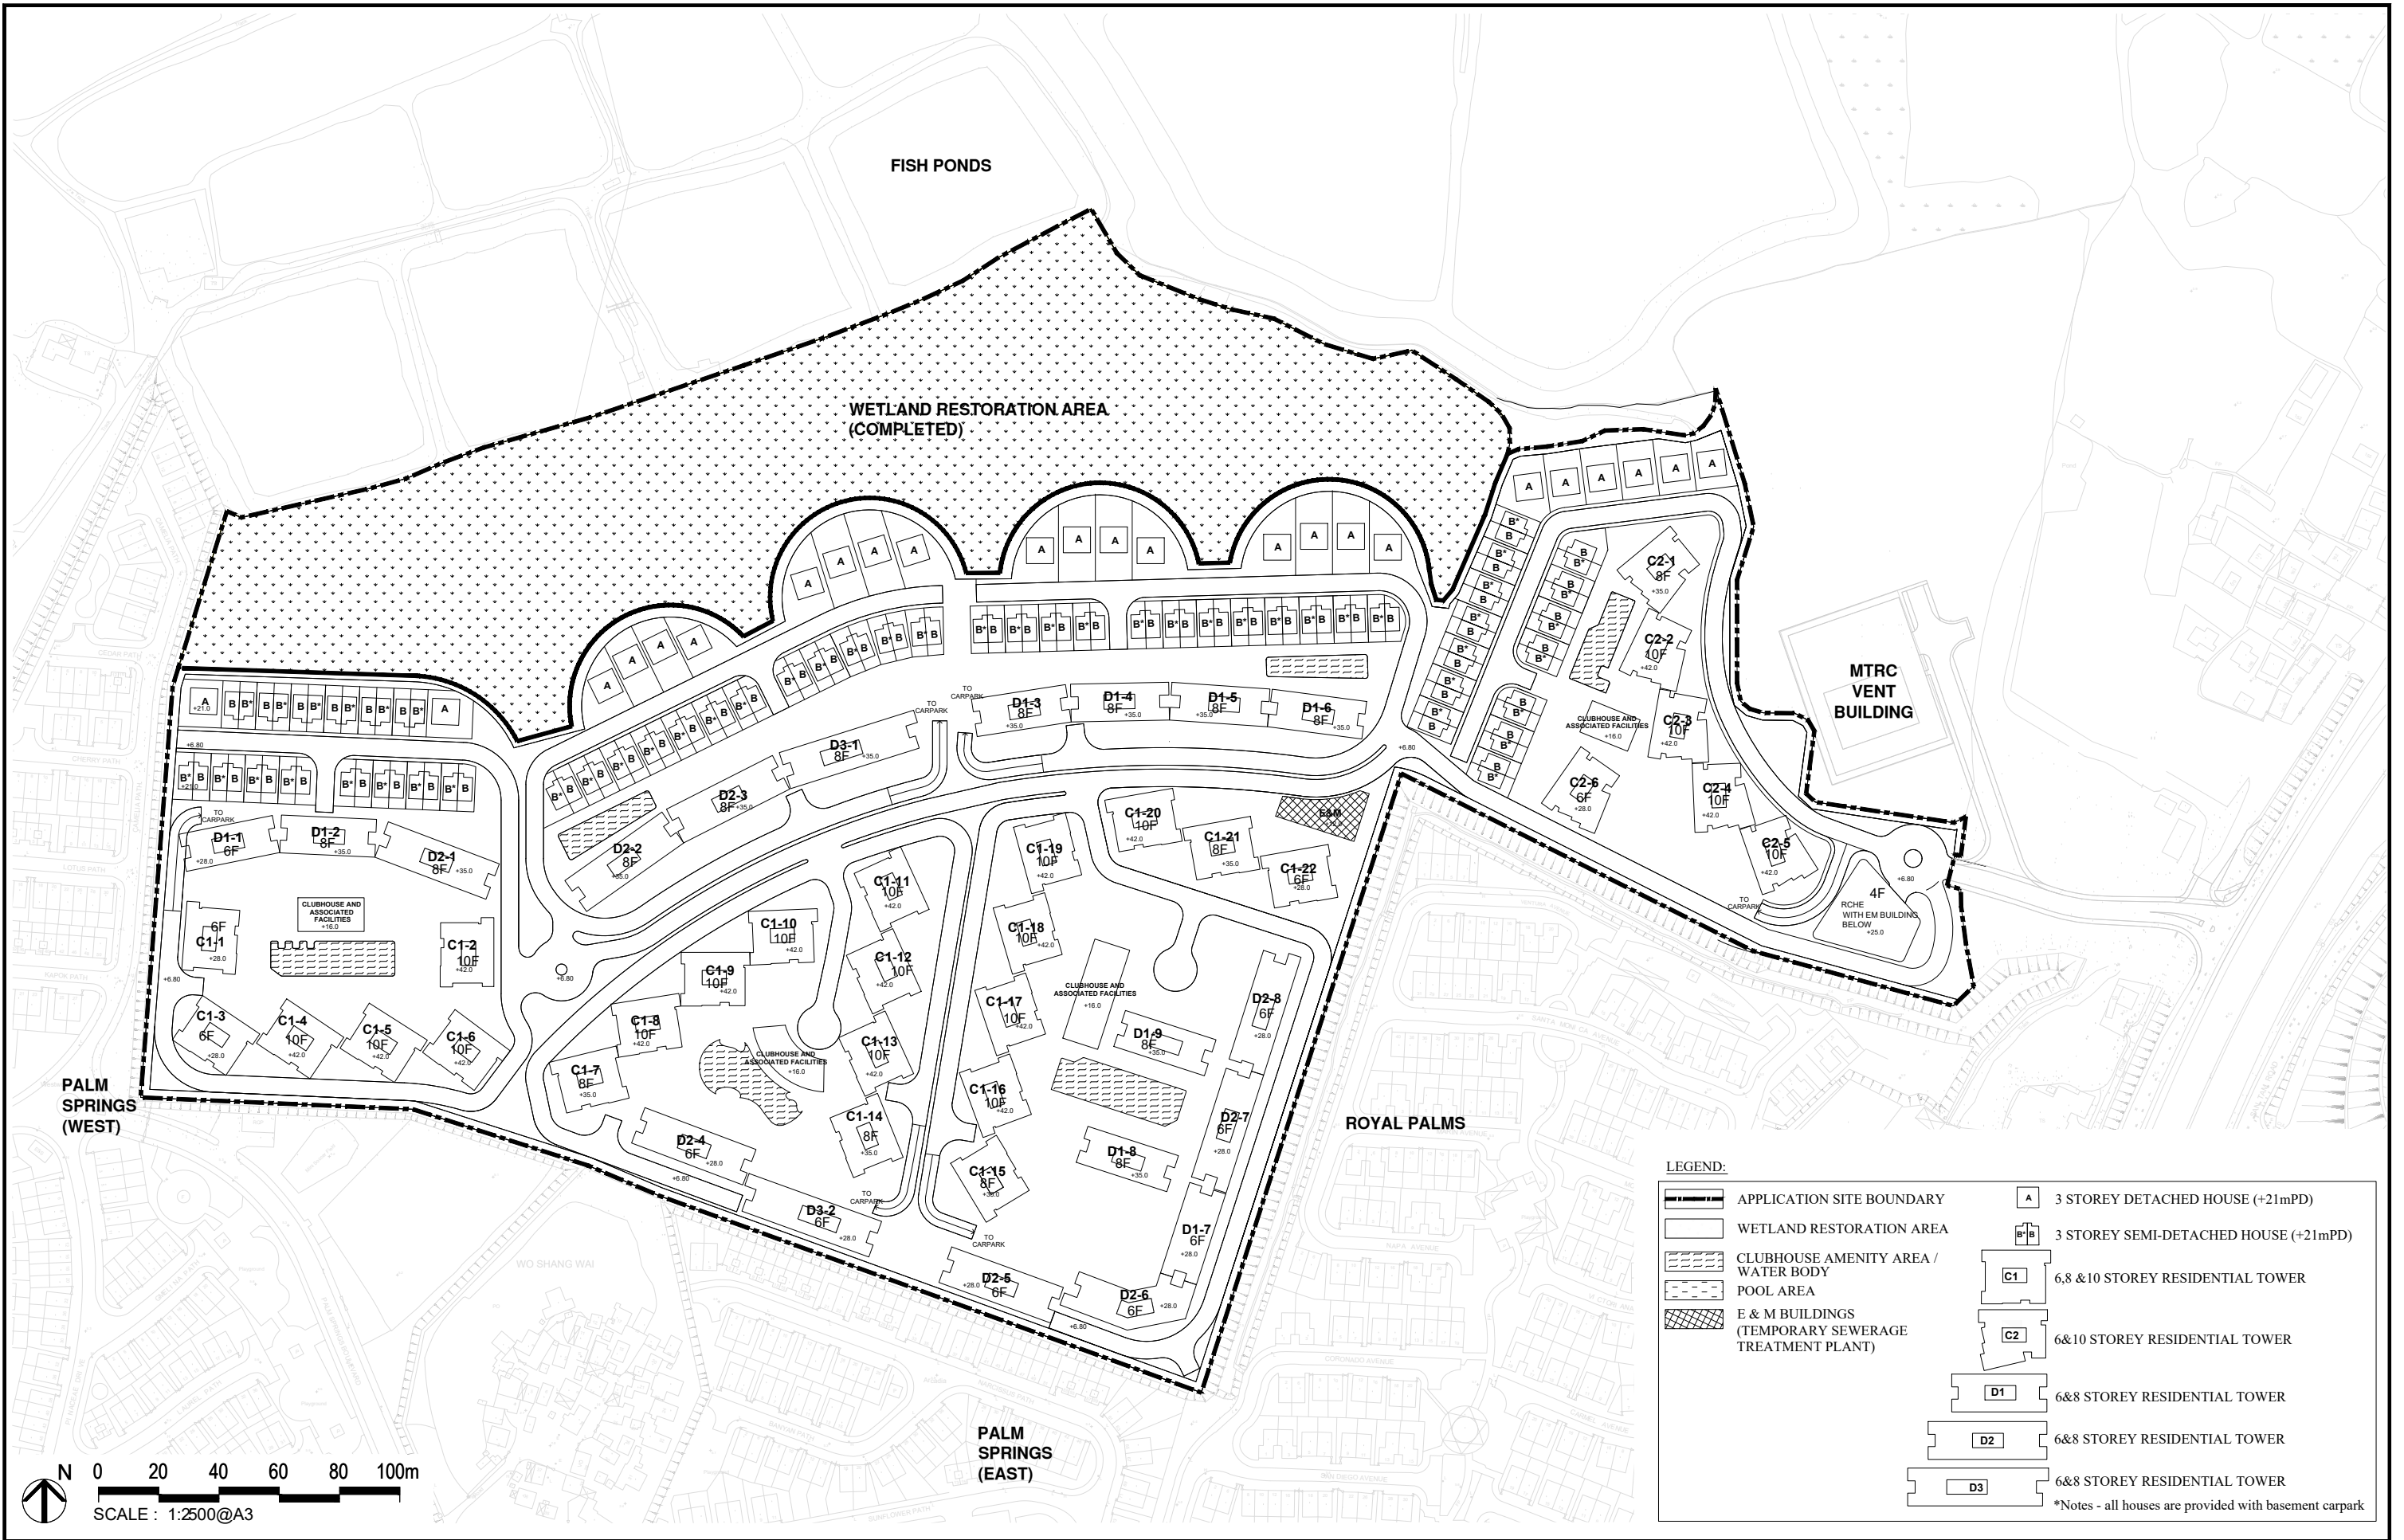


Figure 3: Revised Master Layout Plan in this Amendment Application

Appendix C

Site Visit Photo



Figure 1: Fishpond in WSW village and pump panel



Figure 2: Current inlet of rising mains to Application Site



Figure 3: Bund along Application Site Boundary



Figure 4: Outlet of triple 1350mm dia. pipes before Application Site



Figure 5: Inlet of triple 1350mm dia. Pipes to east portion of Application Site

Appendix D

Location of DSD Flooding Blackspots
(Information Extracted from DSD Website)

LEGEND :

圖例：

- Major Flooding Blackspot
嚴重水浸黑點
- Medium Flooding Blackspot
中程度水浸黑點
- Small Flooding Blackspot
小程度水浸黑點
- Minor Flooding Blackspot
輕微水浸黑點



Flooding Blackspots

水浸黑點


| No. 編號 | Location 地點 |
|-----------|---|
| 1 | Shek Wu Wai, San Tin 新田石湖圍 |
| 2 | Lam Tsuen Valley Basin 林村谷盆地 |
| 3 | Chatham Road South (Granville Road to Austin Avenue) 漆咸道南 (加連威老道和柯士甸路之間) |
| 4 | Pok Fu Lam Village 薄扶林村 |

Remarks :

The DSD blackspots list and location map are produced based on previous flooding records and complaints received by DSD for monitoring the maintenance and mitigation measures to alleviate flooding at the blackspots. Locations susceptible to flooding problems dominated by tidal influence were not included. The blackspots list and maps should not be used as an indication of the actual or hidden flood risk at any particular location in Hong Kong.

備註：


渠務署水浸黑點名單及位置圖是根據我們以往的水浸記錄及收到的水浸投訴編制而成，用以監察該地點維修及防洪措施的進展，一些純粹因潮漲引發水浸的地點並未包括在內。水浸黑點名單及位置圖並不適用於顯示本港任何地方的實際或隱藏水浸風險。

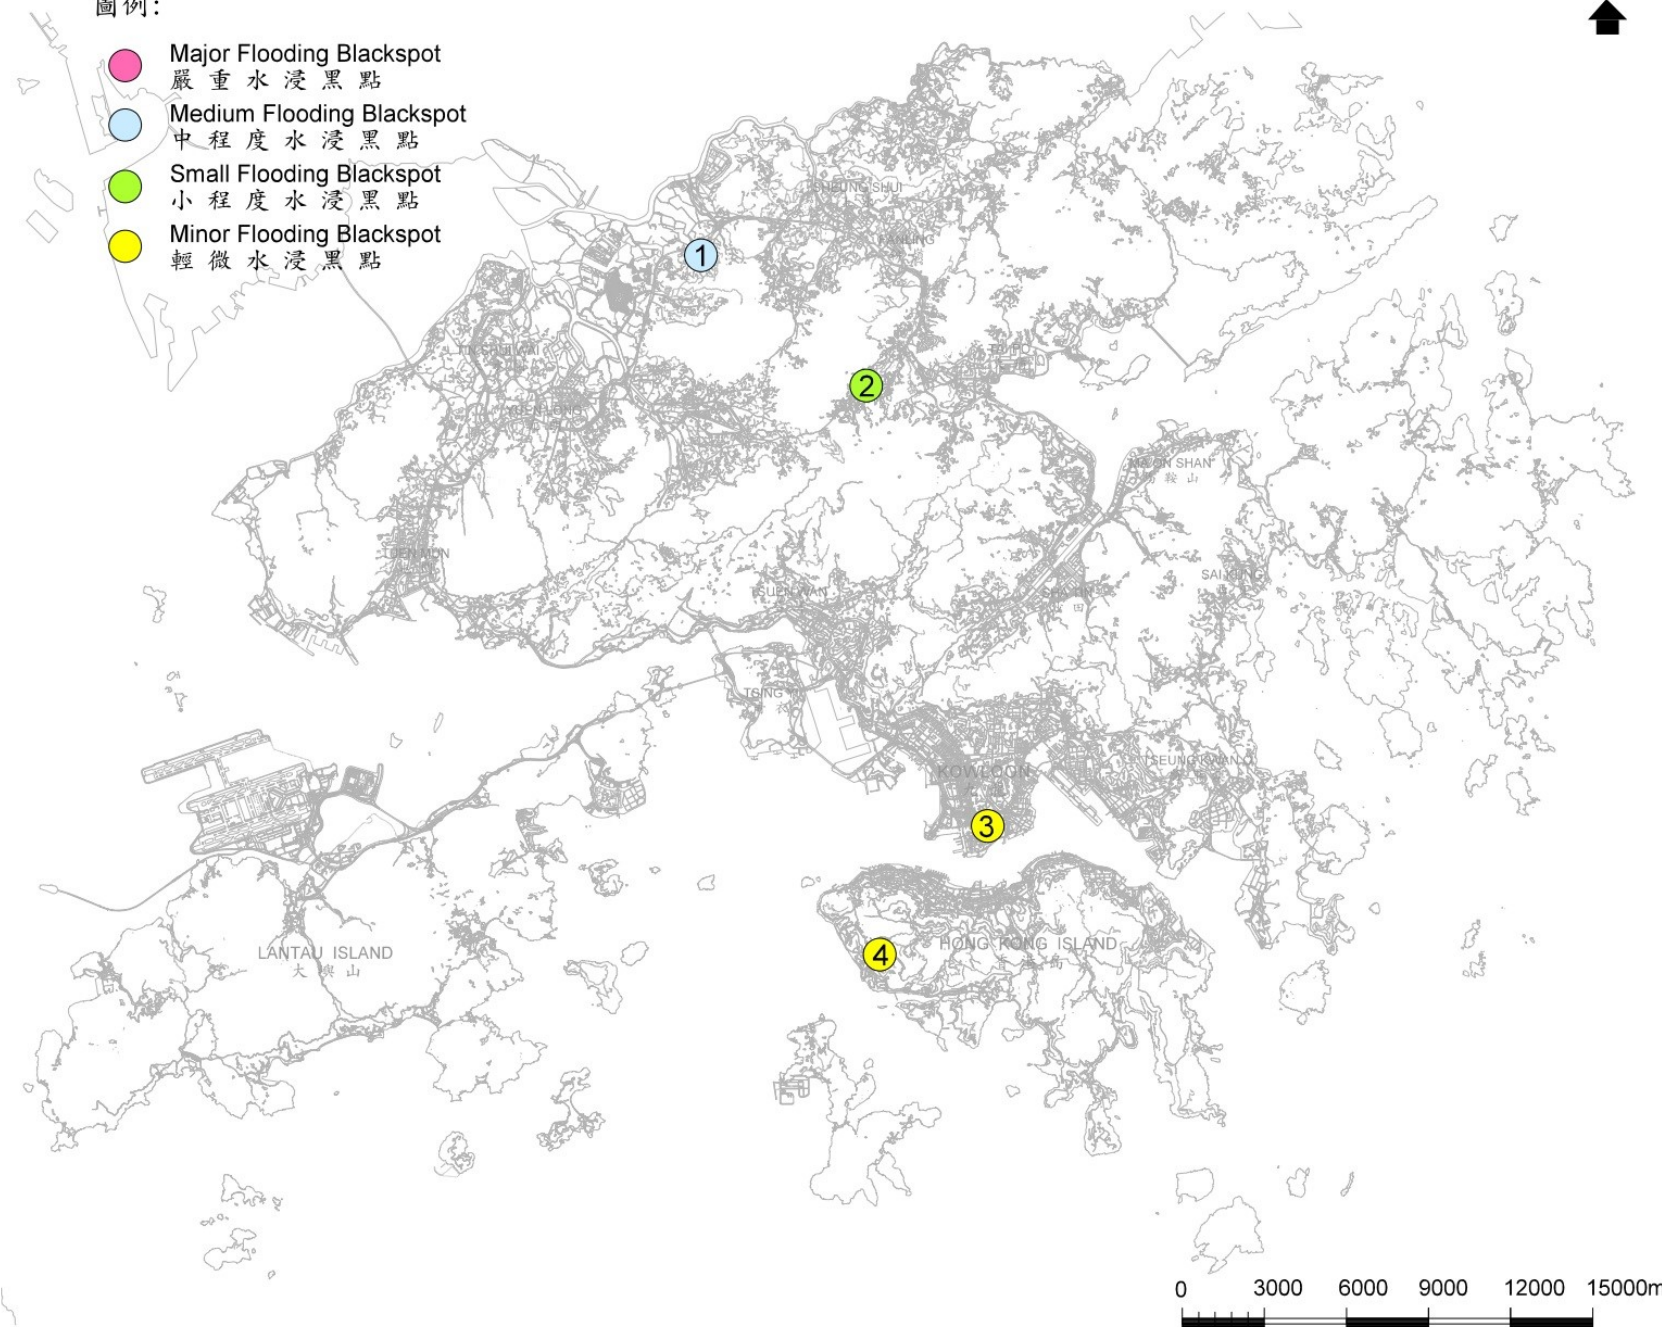

Drawing title

Flooding Blackspots as at March 2024

水浸黑點 (2024 年 3 月 情況)

| | | |
|----------------------------------|------------------------|--|
| Drawing no. DLD 4012D | Scale A4 (1:300000) | Date Mar 2024 |
| Office LAND DRAINAGE DIVISION | |  DRAINAGE SERVICES DEPARTMENT HONG KONG |

Appendix E

Synthetic Rainfall Profile and Its Calculation Example

Design 4-hr Rainfall Profile

Rainfall intensity is calculated according to Section 4.3.5 of SDM as below

| <div>Rain Storm Return Period Storm Constant¹</div> | 2yr | 10yr | 50yr | 200yr |
|--|-------|-------|-------|-------|
| a= | 446.1 | 485 | 505.5 | 508.8 |
| b= | 3.38 | 3.11 | 3.29 | 3.46 |
| c= | 0.463 | 0.397 | 0.355 | 0.322 |

Rainfall Intensity(mm/hr) =

$$F(t) = \begin{cases} \frac{a[b + 2(t - c)]}{(2t + b)^{c+1}} & , \quad 0 \leq t \leq \frac{t_d}{2} \\ F(-t) & , \quad -\frac{t_d}{2} \leq t \leq 0 \end{cases}$$


Rainfall Depth (mm) =28.1%*[Rainfall Intensity/60]

| t | Time Series | Rainfall Depth (mm) | | | | t | Time Series | Rainfall Depth (mm) | | | | t | Time Series | Rainfall Depth (mm) | | | | t | Time Series | Rainfall Depth (mm) | | | | t | Time Series | Rainfall Depth (mm) | | | |
|-----|-------------|---------------------|------|------|-------|----|-------------|---------------------|------|------|-------|----|-------------|---------------------|------|------|-------|----|-------------|---------------------|------|------|-------|-----|-------------|---------------------|------|------|-------|
| | | 2yr | 10yr | 50yr | 200yr | | | 2yr | 10yr | 50yr | 200yr | | | 2yr | 10yr | 50yr | 200yr | | | 2yr | 10yr | 50yr | 200yr | | | 2yr | 10yr | 50yr | 200yr |
| 120 | 0:00:00 | 0.41 | 0.71 | 1.00 | 1.26 | 70 | 0:50:00 | 0.52 | 0.88 | 1.21 | 1.51 | 20 | 1:40:00 | 0.95 | 1.47 | 1.90 | 2.27 | 30 | 2:30:00 | 0.78 | 1.24 | 1.64 | 1.99 | 80 | 3:20:00 | 0.49 | 0.84 | 1.15 | 1.44 |
| 119 | 0:01:00 | 0.41 | 0.71 | 1.00 | 1.27 | 69 | 0:51:00 | 0.53 | 0.89 | 1.22 | 1.51 | 19 | 1:41:00 | 0.98 | 1.50 | 1.94 | 2.31 | 31 | 2:31:00 | 0.77 | 1.23 | 1.62 | 1.96 | 81 | 3:21:00 | 0.49 | 0.83 | 1.15 | 1.44 |
| 118 | 0:02:00 | 0.41 | 0.72 | 1.00 | 1.27 | 68 | 0:52:00 | 0.53 | 0.89 | 1.22 | 1.52 | 18 | 1:42:00 | 1.00 | 1.53 | 1.98 | 2.35 | 32 | 2:32:00 | 0.76 | 1.21 | 1.60 | 1.94 | 82 | 3:22:00 | 0.49 | 0.83 | 1.14 | 1.43 |
| 117 | 0:03:00 | 0.41 | 0.72 | 1.01 | 1.27 | 67 | 0:53:00 | 0.53 | 0.90 | 1.23 | 1.53 | 17 | 1:43:00 | 1.03 | 1.57 | 2.02 | 2.39 | 33 | 2:33:00 | 0.75 | 1.20 | 1.59 | 1.92 | 83 | 3:23:00 | 0.48 | 0.82 | 1.14 | 1.42 |
| 116 | 0:04:00 | 0.41 | 0.72 | 1.01 | 1.28 | 66 | 0:54:00 | 0.54 | 0.90 | 1.24 | 1.53 | 16 | 1:44:00 | 1.06 | 1.61 | 2.07 | 2.44 | 34 | 2:34:00 | 0.74 | 1.18 | 1.57 | 1.91 | 84 | 3:24:00 | 0.48 | 0.82 | 1.13 | 1.42 |
| 115 | 0:05:00 | 0.41 | 0.72 | 1.01 | 1.28 | 65 | 0:55:00 | 0.54 | 0.91 | 1.24 | 1.54 | 15 | 1:45:00 | 1.10 | 1.65 | 2.11 | 2.50 | 35 | 2:35:00 | 0.73 | 1.17 | 1.55 | 1.89 | 85 | 3:25:00 | 0.48 | 0.82 | 1.13 | 1.41 |
| 114 | 0:06:00 | 0.42 | 0.73 | 1.02 | 1.28 | 64 | 0:56:00 | 0.55 | 0.92 | 1.25 | 1.55 | 14 | 1:46:00 | 1.13 | 1.70 | 2.17 | 2.55 | 36 | 2:36:00 | 0.72 | 1.15 | 1.54 | 1.87 | 86 | 3:26:00 | 0.48 | 0.81 | 1.12 | 1.41 |
| 113 | 0:07:00 | 0.42 | 0.73 | 1.02 | 1.29 | 63 | 0:57:00 | 0.55 | 0.92 | 1.26 | 1.56 | 13 | 1:47:00 | 1.18 | 1.75 | 2.23 | 2.62 | 37 | 2:37:00 | 0.71 | 1.14 | 1.52 | 1.85 | 87 | 3:27:00 | 0.47 | 0.81 | 1.12 | 1.40 |
| 112 | 0:08:00 | 0.42 | 0.73 | 1.02 | 1.29 | 62 | 0:58:00 | 0.55 | 0.93 | 1.26 | 1.57 | 12 | 1:48:00 | 1.22 | 1.81 | 2.30 | 2.69 | 38 | 2:38:00 | 0.70 | 1.13 | 1.51 | 1.84 | 88 | 3:28:00 | 0.47 | 0.81 | 1.11 | 1.40 |
| 111 | 0:09:00 | 0.42 | 0.73 | 1.03 | 1.30 | 61 | 0:59:00 | 0.56 | 0.93 | 1.27 | 1.57 | 11 | 1:49:00 | 1.28 | 1.88 | 2.37 | 2.76 | 39 | 2:39:00 | 0.69 | 1.12 | 1.49 | 1.82 | 89 | 3:29:00 | 0.47 | 0.80 | 1.11 | 1.39 |
| 110 | 0:10:00 | 0.42 | 0.74 | 1.03 | 1.30 | 60 | 1:00:00 | 0.56 | 0.94 | 1.28 | 1.58 | 10 | 1:50:00 | 1.34 | 1.95 | 2.45 | 2.85 | 40 | 2:40:00 | 0.68 | 1.11 | 1.48 | 1.81 | 90 | 3:30:00 | 0.47 | 0.80 | 1.11 | 1.39 |
| 109 | 0:11:00 | 0.43 | 0.74 | 1.03 | 1.30 | 59 | 1:01:00 | 0.57 | 0.95 | 1.29 | 1.59 | 9 | 1:51:00 | 1.41 | 2.04 | 2.55 | 2.95 | 41 | 2:41:00 | 0.67 | 1.10 | 1.47 | 1.79 | 91 | 3:31:00 | 0.46 | 0.79 | 1.10 | 1.38 |
| 108 | 0:12:00 | 0.43 | 0.74 | 1.04 | 1.31 | 58 | 1:02:00 | 0.57 | 0.95 | 1.29 | 1.60 | 8 | 1:52:00 | 1.49 | 2.14 | 2.66 | 3.07 | 42 | 2:42:00 | 0.67 | 1.08 | 1.45 | 1.78 | 92 | 3:32:00 | 0.46 | 0.79 | 1.10 | 1.38 |
| 107 | 0:13:00 | 0.43 | 0.74 | 1.04 | 1.31 | 57 | 1:03:00 | 0.58 | 0.96 | 1.30 | 1.61 | 7 | 1:53:00 | 1.59 | 2.26 | 2.80 | 3.21 | 43 | 2:43:00 | 0.66 | 1.07 | 1.44 | 1.76 | 93 | 3:33:00 | 0.46 | 0.79 | 1.09 | 1.37 |
| 106 | 0:14:00 | 0.43 | 0.75 | 1.04 | 1.32 | 56 | 1:04:00 | 0.58 | 0.97 | 1.31 | 1.62 | 6 | 1:54:00 | 1.72 | 2.41 | 2.96 | 3.37 | 44 | 2:44:00 | 0.65 | 1.06 | 1.43 | 1.75 | 94 | 3:34:00 | 0.46 | 0.78 | 1.09 | 1.37 |
| 105 | 0:15:00 | 0.43 | 0.75 | 1.05 | 1.32 | 55 | 1:05:00 | 0.59 | 0.97 | 1.32 | 1.63 | 5 | 1:55:00 | 1.87 | 2.60 | 3.16 | 3.58 | 45 | 2:45:00 | 0.65 | 1.05 | 1.42 | 1.74 | 95 | 3:35:00 | 0.45 | 0.78 | 1.08 | 1.36 |
| 104 | 0:16:00 | 0.43 | 0.75 | 1.05 | 1.32 | 54 | 1:06:00 | 0.59 | 0.98 | 1.33 | 1.64 | 4 | 1:56:00 | 2.08 | 2.84 | 3.42 | 3.84 | 46 | 2:46:00 | 0.64 | 1.05 | 1.41 | 1.73 | 96 | 3:36:00 | 0.45 | 0.78 | 1.08 | 1.36 |
| 103 | 0:17:00 | 0.44 | 0.76 | 1.05 | 1.33 | 53 | 1:07:00 | 0.60 | 0.99 | 1.34 | 1.65 | 3 | 1:57:00 | 2.38 | 3.18 | 3.77 | 4.19 | 47 | 2:47:00 | 0.63 | 1.04 | 1.40 | 1.71 | 97 | 3:37:00 | 0.45 | 0.77 | 1.08 | 1.35 |
| 102 | 0:18:00 | 0.44 | 0.76 | 1.06 | 1.33 | 52 | 1:08:00 | 0.60 | 1.00 | 1.35 | 1.66 | 2 | 1:58:00 | 2.83 | 3.69 | 4.29 | 4.71 | 48 | 2:48:00 | 0.63 | 1.03 | 1.39 | 1.70 | 98 | 3:38:00 | 0.45 | 0.77 | 1.07 | 1.35 |
| 101 | 0:19:00 | 0.44 | 0.76 | 1.06 | 1.34 | 51 | 1:09:00 | 0.61 | 1.00 | 1.36 | 1.67 | 1 | 1:59:00 | 3.62 | 4.58 | 5.17 | 5.55 | 49 | 2:49:00 | 0.62 | 1.02 | 1.38 | 1.69 | 99 | 3:39:00 | 0.44 | 0.77 | 1.07 | 1.35 |
| 100 | 0:20:00 | 0.44 | 0.76 | 1.06 | 1.34 | 50 | 1:10:00 | 0.61 | 1.01 | 1.37 | 1.68 | 0 | 2:00:00 | 5.42 | 6.60 | 7.07 | 7.28 | 50 | 2:50:00 | 0.61 | 1.01 | 1.37 | 1.68 | 100 | 3:40:00 | 0.44 | 0.76 | 1.06 | 1.34 |
| 99 | 0:21:00 | 0.44 | 0.77 | 1.07 | 1.35 | 49 | 1:11:00 | 0.62 | 1.02 | 1.38 | 1.69 | 1 | 2:01:00 | 3.62 | 4.58 | 5.17 | 5.55 | 51 | 2:51:00 | 0.61 | 1.00 | 1.36 | 1.67 | 101 | 3:41:00 | 0.44 | 0.76 | 1.06 | 1.34 |
| 98 | 0:22:00 | 0.45 | 0.77 | 1.07 | 1.35 | 48 | 1:12:00 | 0.63 | 1.03 | 1.39 | 1.70 | 2 | 2:02:00 | 2.83 | 3.69 | 4.29 | 4.71 | 52 | 2:52:00 | 0.60 | 1.00 | 1.35 | 1.66 | 102 | 3:42:00 | 0.44 | 0.76 | 1.06 | 1.33 |
| 97 | 0:23:00 | 0.45 | 0.77 | 1.08 | 1.35 | 47 | 1:13:00 | 0.63 | 1.04 | 1.40 | 1.71 | 3 | 2:03:00 | 2.38 | 3.18 | 3.77 | 4.19 | 53 | 2:53:00 | 0.60 | 0.99 | 1.34 | 1.65 | 103 | 3:43:00 | 0.44 | 0.76 | 1.05 | 1.33 |
| 96 | 0:24:00 | 0.45 | 0.78 | 1.08 | 1.36 | 46 | 1:14:00 | 0.64 | 1.05 | 1.41 | 1.73 | 4 | 2:04:00 | 2.08 | 2.84 | 3.42 | 3.84 | 54 | 2:54:00 | 0.59 | 0.98 | 1.33 | 1.64 | 104 | 3:44:00 | 0.43 | 0.75 | 1.05 | 1.32 |
| 95 | 0:25:00 | 0.45 | 0.78 | 1.08 | 1.36 | 45 | 1:15:00 | 0.65 | 1.05 | 1.42 | 1.74 | 5 | 2:05:00 | 1.87 | 2.60 | 3.16 | 3.58 | 55 | 2:55:00 | 0.59 | 0.97 | 1.32 | 1.63 | 105 | 3:45:00 | 0.43 | 0.75 | 1.05 | 1.32 |
| 94 | 0:26:00 | 0.46 | 0.78 | 1.09 | 1.37 | 44 | 1:16:00 | 0.65 | 1.06 | 1.43 | 1.75 | 6 | 2:06:00 | 1.72 | 2.41 | 2.96 | 3.37 | 56 | 2:56:00 | 0.58 | 0.97 | 1.31 | 1.62 | 106 | 3:46:00 | 0.43 | 0.75 | 1.04 | 1.32 |
| 93 | 0:27:00 | 0.46 | 0.79 | 1.09 | 1.37 | 43 | 1:17:00 | 0.66 | 1.07 | 1.44 | 1.76 | 7 | 2:07:00 | 1.59 | 2.26 | 2.80 | 3.21 | 57 | 2:57:00 | 0.58 | 0.96 | 1.30 | 1.61 | 107 | 3:47:00 | 0.43 | 0.74 | 1.04 | 1.31 |
| 92 | 0:28:00 | 0.46 | 0.79 | 1.10 | 1.38 | 42 | 1:18:00 | 0.67 | 1.08 | 1.45 | 1.78 | 8 | 2:08:00 | 1.49 | 2.14 | 2.66 | 3.07 | 58 | 2:58:00 | 0.57 | 0.95 | 1.29 | 1.60 | 108 | 3:48:00 | 0.43 | 0.74 | 1.04 | 1.31 |
| 91 | 0:29:00 | 0.46 | 0.79 | 1.10 | 1.38 | 41 | 1:19:00 | 0.67 | 1.10 | 1.47 | 1.79 | 9 | 2:09:00 | 1.41 | 2.04 | 2.55 | 2.95 | 59 | 2:59:00 | 0.57 | 0.95 | 1.29 | 1.59 | 109 | 3:49:00 | 0.43 | 0.74 | 1.03 | 1.30 |
| 90 | 0:30:00 | 0.47 | 0.80 | 1.11 | 1.39 | 40 | 1:20:00 | 0.68 | 1.11 | 1.48 | 1.81 | 10 | 2:10:00 | 1.34 | 1.95 | 2.45 | 2.85 | 60 | 3:00:00 | 0.56 | 0.94 | 1.28 | 1.58 | 110 | 3:50:00 | 0.42 | 0.74 | 1.03 | 1.30 |
| 89 | 0:31:00 | 0.47 | 0.80 | 1.11 | 1.39 | 39 | 1:21:00 | 0.69 | 1.12 | 1.49 | 1.82 | 11 | 2:11:00 | 1.28 | 1.88 | 2.37 | 2.76 | 61 | 3:01:00 | 0.56 | 0.93 | 1.27 | 1.57 | 111 | 3:51:00 | 0.42 | 0.73 | 1.03 | 1.30 |
| 88 | 0:32:00 | 0.47 | 0.81 | 1.11 | 1.40 | 38 | 1:22:00 | 0.70 | 1.13 | 1.51 | 1.84 | 12 | 2:12:00 | 1.22 | 1.81 | 2.30 | 2.69 | 62 | 3:02:00 | 0.55 | 0.93 | 1.26 | 1.57 | 112 | 3:52:00 | 0.42 | 0.73 | 1.02 | 1.29 |
| 87 | 0:33:00 | 0.47 | 0.81 | 1.12 | 1.40 | 37 | 1:23:00 | 0.71 | 1.14 | 1.52 | 1.85 | 13 | 2:13:00 | 1.18 | 1.75 | 2.23 | 2.62 | 63 | 3:03:00 | | | | | | | | | | |


Appendix F
Catchment Characteristic Input for
MP02A-A1 to A8 and AA-AE
(Information Extracted from Mike11 RR Model)
&
Modelling settings in Mike 11 for Wetland
Restoration Area

Catchment Characteristic Input in Mike 11 Hydraulic Model

Pre-Development Drainage Network

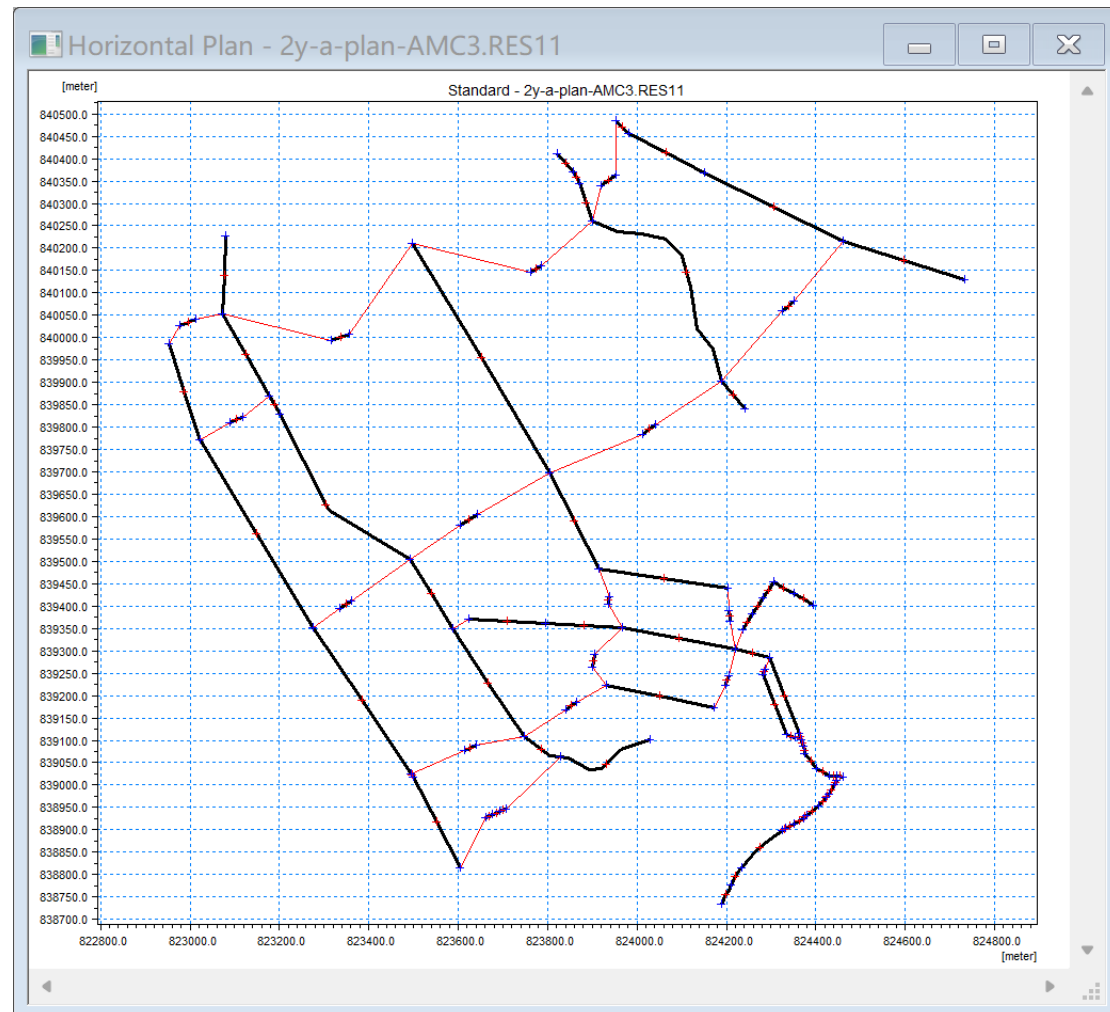

Post-Development Drainage Network

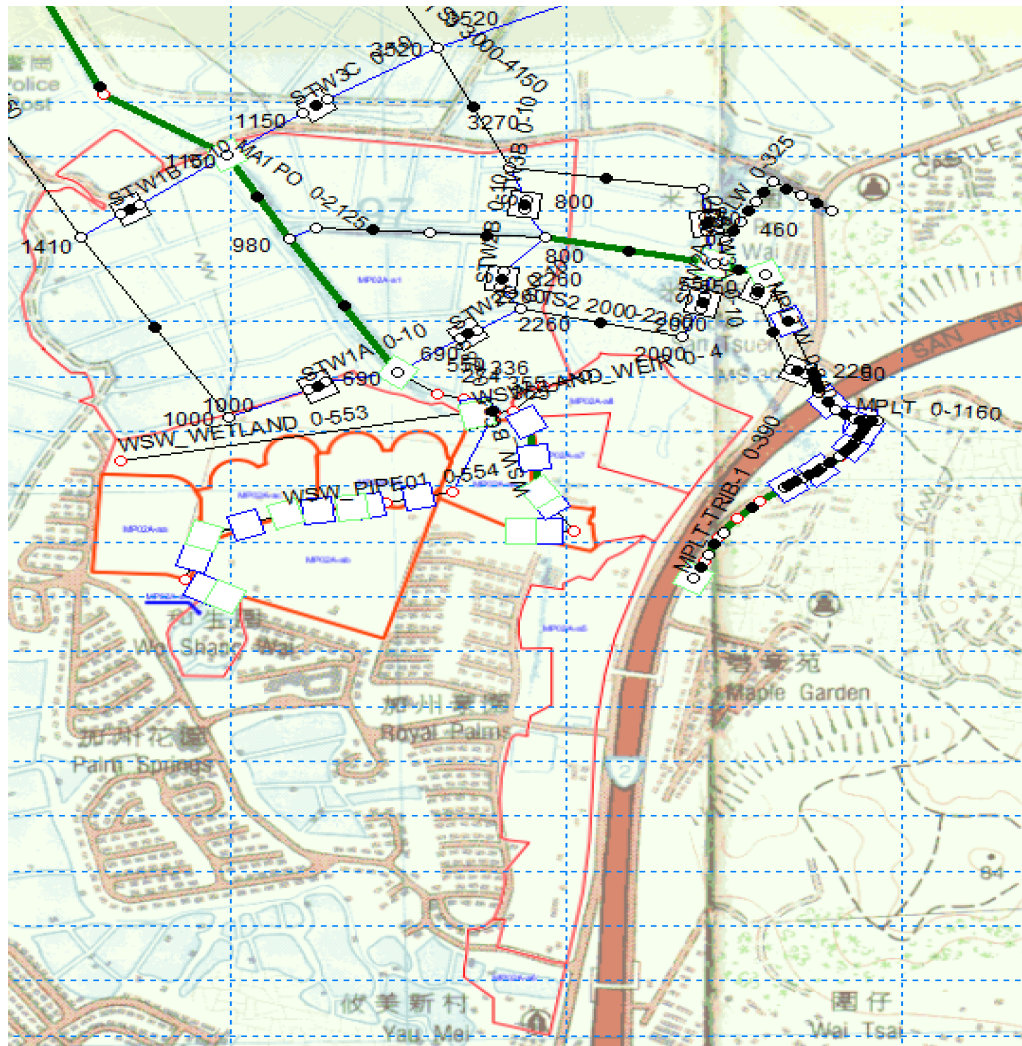

Catchment Characteristic Input in Mike 11 Hydraulic Model

Pre-Development Condition of Catchment MP02A-A1 to A8

(Areal reduction factors of 0.82 and AMC 3 as example)

MIKE Zero - [Plan2011-81rf-AMC3_2y - Modified]

File Edit Grid View Parameters Layers Basin Work Area Window Help

Catchments NAM UHM SMAP Urban FEH DRIFT Timeseries

B01A-A

Adjustment and Baseflow

Area adjustment

Baseflow

Hydrograph

SCS dimensionless

Enlargement and Loss Model

SCS method Curve

Initial

Lag Time

Curve number method Lag Time

Hydraulic

Slope

Curve

Overview

| | Name | Method | AreaAF | Baseflow | InitLoss | ConstLos | RunoffC | LossCurv | InitialAM | LagTime | HLength | Slope | LagCurve | Rainfall | Effective | Basin | Basin | Time of | f1 | Rsa |
|-----|----------|--------|--------|----------|----------|----------|---------|----------|-----------|---------|---------|-------|----------|----------|-----------|-------|-------|---------|----|-----|
| 218 | MP02A-A1 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 100 | 3 | 0.3 | 0.44 | 0.34 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 219 | MP02A-A4 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 90 | 3 | 4.18 | 1.03 | 0.02 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 220 | MP02A-A5 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 85 | 3 | 1.48 | 0.94 | 0.2 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 221 | MP02A-A6 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 85 | 3 | 1.94 | 1.1 | 0.15 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 222 | MP02A-A7 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 85 | 3 | 0.52 | 0.48 | 0.55 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 223 | MP02A-A8 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 85 | 3 | 0.68 | 0.53 | 0.38 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Ready No Tracking Mode NUM

MIKE Zero - [Plan2011-81rf-AMC3_2y - Modified]

File Edit Grid View Parameters Layers Basin Work Area Window Help

Catchments NAM UHM SMAP Urban FEH DRIFT Timeseries

B01A-A

Adjustment and Baseflow

Area adjustment

Baseflow

Hydrograph

SCS dimensionless

Enlargement and Loss Model

SCS method Curve

Initial

Lag Time

Curve number method Lag Time

Hydraulic

Slope

Curve

Overview

| | Name | Method | AreaAF | Baseflow | InitLoss | ConstLos | RunoffC | LossCurv | InitialAM | LagTime | HLength | Slope | LagCurve | Rainfall | Effective | Basin | Basin | Time of | f1 | Rsa |
|-----|----------|--------|--------|----------|----------|----------|---------|----------|-----------|---------|---------|-------|----------|----------|-----------|-------|-------|---------|----|-----|
| 220 | MP02A-A5 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 85 | 3 | 1.48 | 0.94 | 0.2 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 221 | MP02A-A6 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 85 | 3 | 1.94 | 1.1 | 0.15 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 222 | MP02A-A7 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 85 | 3 | 0.52 | 0.48 | 0.55 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 223 | MP02A-A8 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 85 | 3 | 0.68 | 0.53 | 0.38 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 224 | MP02A-A2 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 85 | 3 | 0.114 | 0.16 | 2 | 85 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 225 | MP02A-A3 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 85 | 3 | 0.114 | 0.16 | 2 | 85 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Ready No Tracking Mode NUM

Catchment Characteristic Input in Mike 11 Hydraulic Model

Post-Development Condition of Catchment MP02A-AA to AE

(Areal reduction factors of 0.82 and AMC 3 as example)

MIKE Zero - [Plan2011-81rf-AMC3_200y - Modified]

File Edit Grid View Parameters Layers Basin Work Area Window Help

Catchments NAM UHM SMAP Urban FEH DRIFT Timeseries

B01A-A

Adjustment and Baseflow

Area adjustment 0.82

Baseflow 0

Hydrograph

SCS dimensionless

Enlargement and Loss Model

SCS method Curve 62

Initial 3

Lag Time

Curve number method Lag Time Calculate 0.55

Hydraulic 2.45

Slope 25

Curve 62

Overview

| | Name | Method | AreaAF | Baseflow | InitLoss | ConstLos | RunoffC | LossCurv | InitialAM | LagTime | HLength | Slope | LagCurve | Rainfall | Effective | Basin | Basin | Time of | f1 | Rsa |
|-----|----------|--------|--------|----------|----------|----------|---------|----------|-----------|---------|---------|-------|----------|----------|-----------|-------|-------|---------|----|-----|
| 224 | MP02A-A9 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 100 | 3 | 0.09 | 0.01 | 0.01 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 225 | MP02A-AA | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 91 | 3 | 0.0903 | 0.16 | 2 | 91 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 226 | MP02A-AB | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 91 | 3 | 0.0903 | 0.16 | 2 | 91 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 227 | MP02A-AC | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 91 | 3 | 0.0903 | 0.16 | 2 | 91 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 228 | MP02A-AD | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 91 | 3 | 0.0903 | 0.16 | 2 | 91 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 229 | MP02A-AE | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 91 | 3 | 0.0298 | 0.04 | 2 | 91 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Catchment Characteristic Input in Mike 11 Hydraulic Model in Previous

Approved DIA in March 2024

Post-Development Condition of Catchment MP02A-AA to AE

(Areal reduction factors of 0.82 and AMC 3 as example)

MIKE Zero - [Plan2011-81rf-AMC3_2y - Modified]

File Edit Grid View Parameters Layers Basin Work Area Window Help

Catchments NAM UHM SMAP Urban FEH DRIFT Timeseries

B01A-A

Adjustment and Baseflow

Area adjustment 0.82

Baseflow 0

Hydrograph

SCS dimensionless

Enlargement and Loss Model

SCS method Curve 62

Initial 3

Lag Time

Curve number method Lag Time Calculate 0.55

Hydraulic 2.45

Slope 25

Curve 62

Overview


| | Name | Method | AreaAF | Baseflow | InitLoss | ConstLos | RunoffC | LossCurv | InitialAM | LagTime | HLength | Slope | LagCurve | Rainfall | Effective | Basin |
|-----|----------|--------|--------|----------|----------|----------|---------|----------|-----------|---------|---------|-------|----------|----------|-----------|-------|
| 215 | SWS8 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 79 | 3 | 8.89 | 6.9 | 0.2 | 8 | 0 | 0 | 0 |
| 216 | SWS9 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 49 | 3 | 6.81 | 5 | 1 | 6 | 0 | 0 | 0 |
| 217 | I01A-C | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 67 | 3 | 0.43 | 1.78 | 19 | 0 | 0 | 0 | 0 |
| 218 | MP02A-A1 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 100 | 3 | 0.3 | 0.44 | 0.34 | 0 | 0 | 0 | 0 |
| 219 | MP02A-A4 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 90 | 3 | 4.18 | 1.03 | 0.02 | 4 | 0 | 0 | 0 |
| 220 | MP02A-A5 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 85 | 3 | 1.48 | 0.94 | 0.2 | 1 | 0 | 0 | 0 |
| 221 | MP02A-A6 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 85 | 3 | 1.94 | 1.1 | 0.15 | 1 | 0 | 0 | 0 |
| 222 | MP02A-A7 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 85 | 3 | 0.52 | 0.48 | 0.55 | 0 | 0 | 0 | 0 |
| 223 | MP02A-A8 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 85 | 3 | 0.68 | 0.53 | 0.38 | 0 | 0 | 0 | 0 |
| 224 | MP02A-A9 | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 100 | 3 | 0.09 | 0.01 | 0.01 | 0 | 0 | 0 | 0 |
| 225 | MP02A-AA | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 90 | 3 | 0.0942 | 0.16 | 2 | 90 | 0 | 0 | 0 |
| 226 | MP02A-AB | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 90 | 3 | 0.0942 | 0.16 | 2 | 90 | 0 | 0 | 0 |
| 227 | MP02A-AC | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 90 | 3 | 0.0942 | 0.16 | 2 | 90 | 0 | 0 | 0 |
| 228 | MP02A-AD | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 90 | 3 | 0.0942 | 0.16 | 2 | 90 | 0 | 0 | 0 |
| 229 | MP02A-AE | SCS di | 0.82 | 0 | 0 | 0 | 0.75 | 90 | 3 | 0.0311 | 0.04 | 2 | 90 | 0 | 0 | 0 |

Appendix G

Hydrograph of Wetland Restoration Area


Hydrograph of Wetland Restoration Area

2yr Rainstorm Event, AMC3, RF=1.0

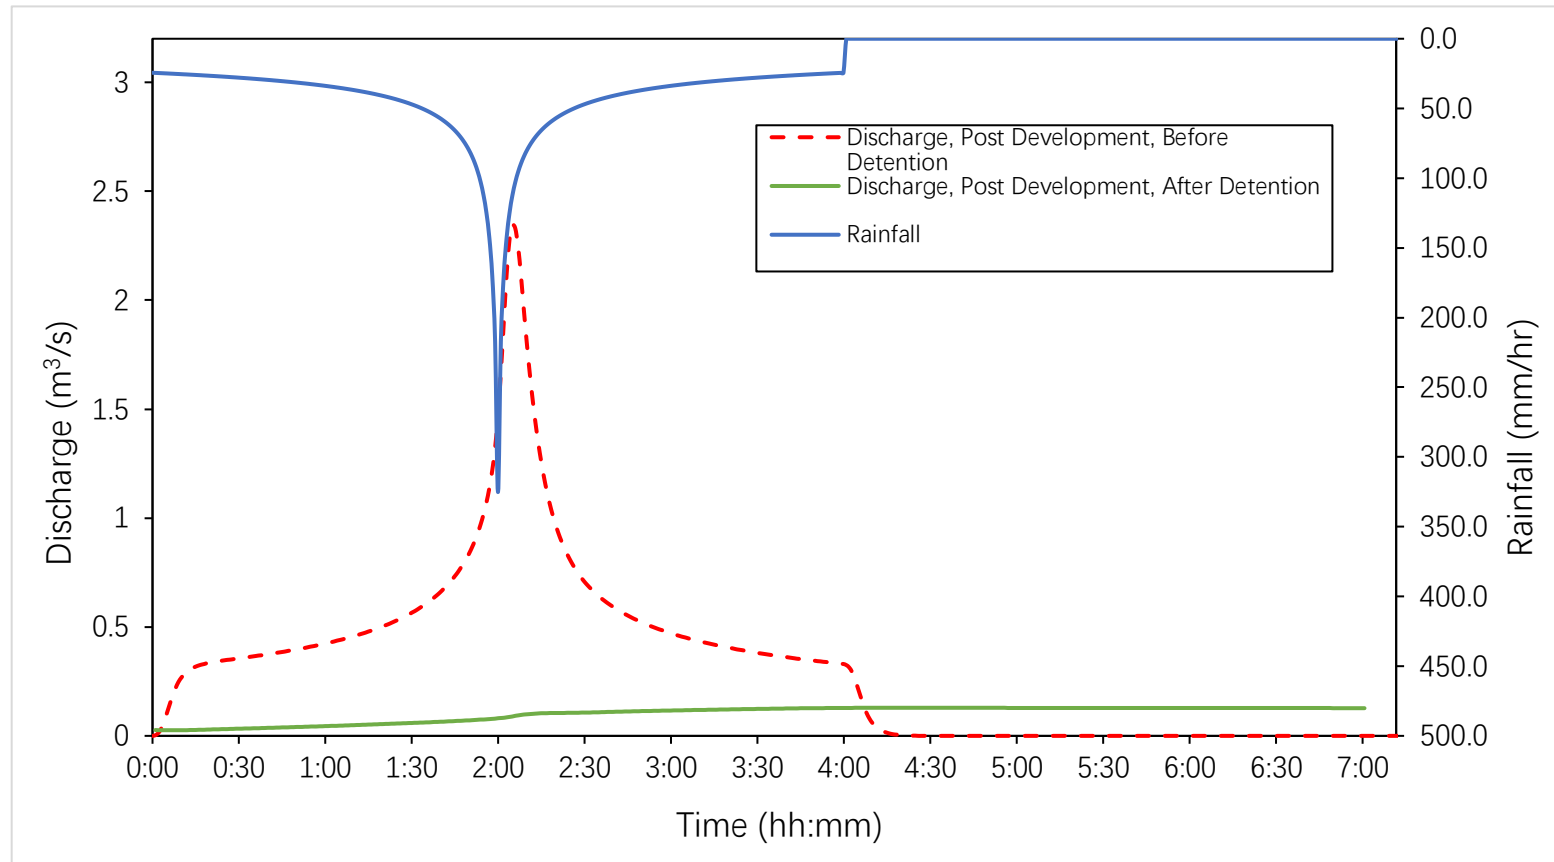


Hydrograph of Wetland Restoration Area

10yr Rainstorm Event, AMC3, RF=1.0

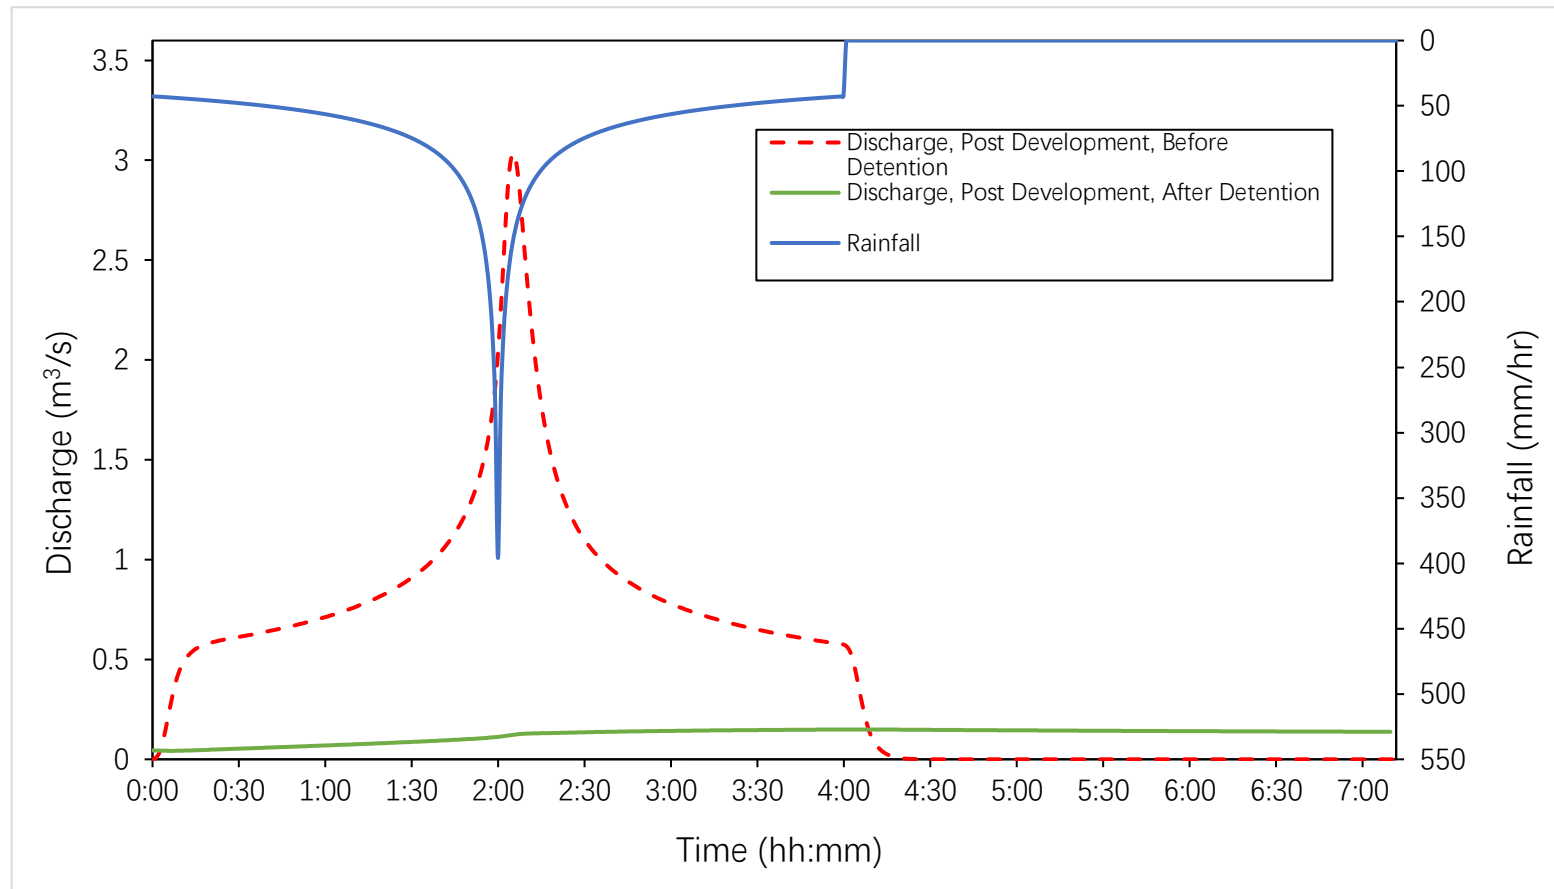


Hydrograph of Wetland Restoration Area

50yr Rainstorm Event, AMC3, RF=1.0

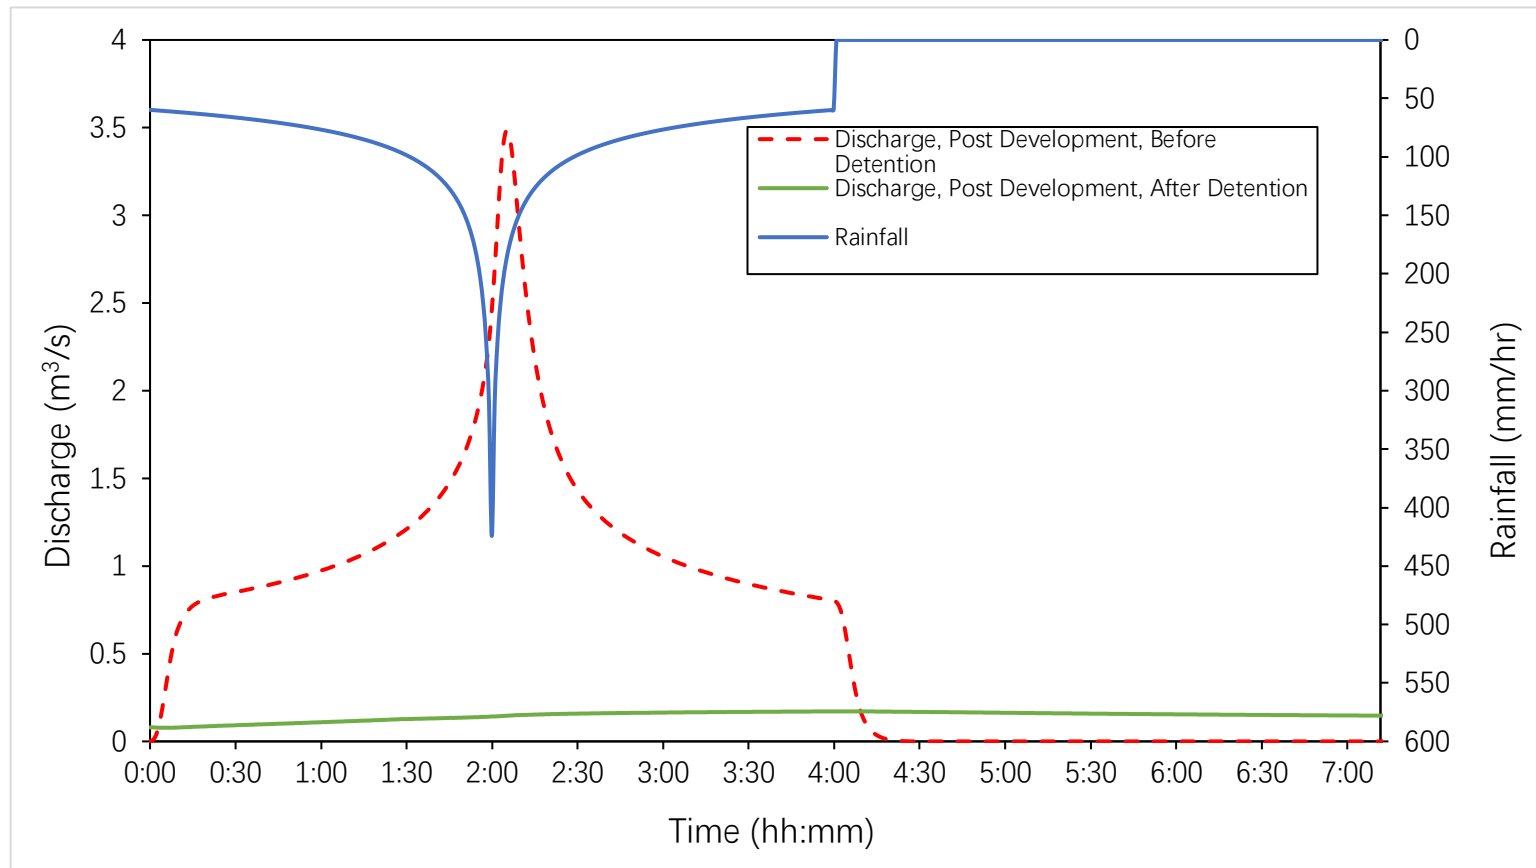

Hydrograph of Wetland Restoration Area

200yr Rainstorm Event, AMC3, RF=1.0

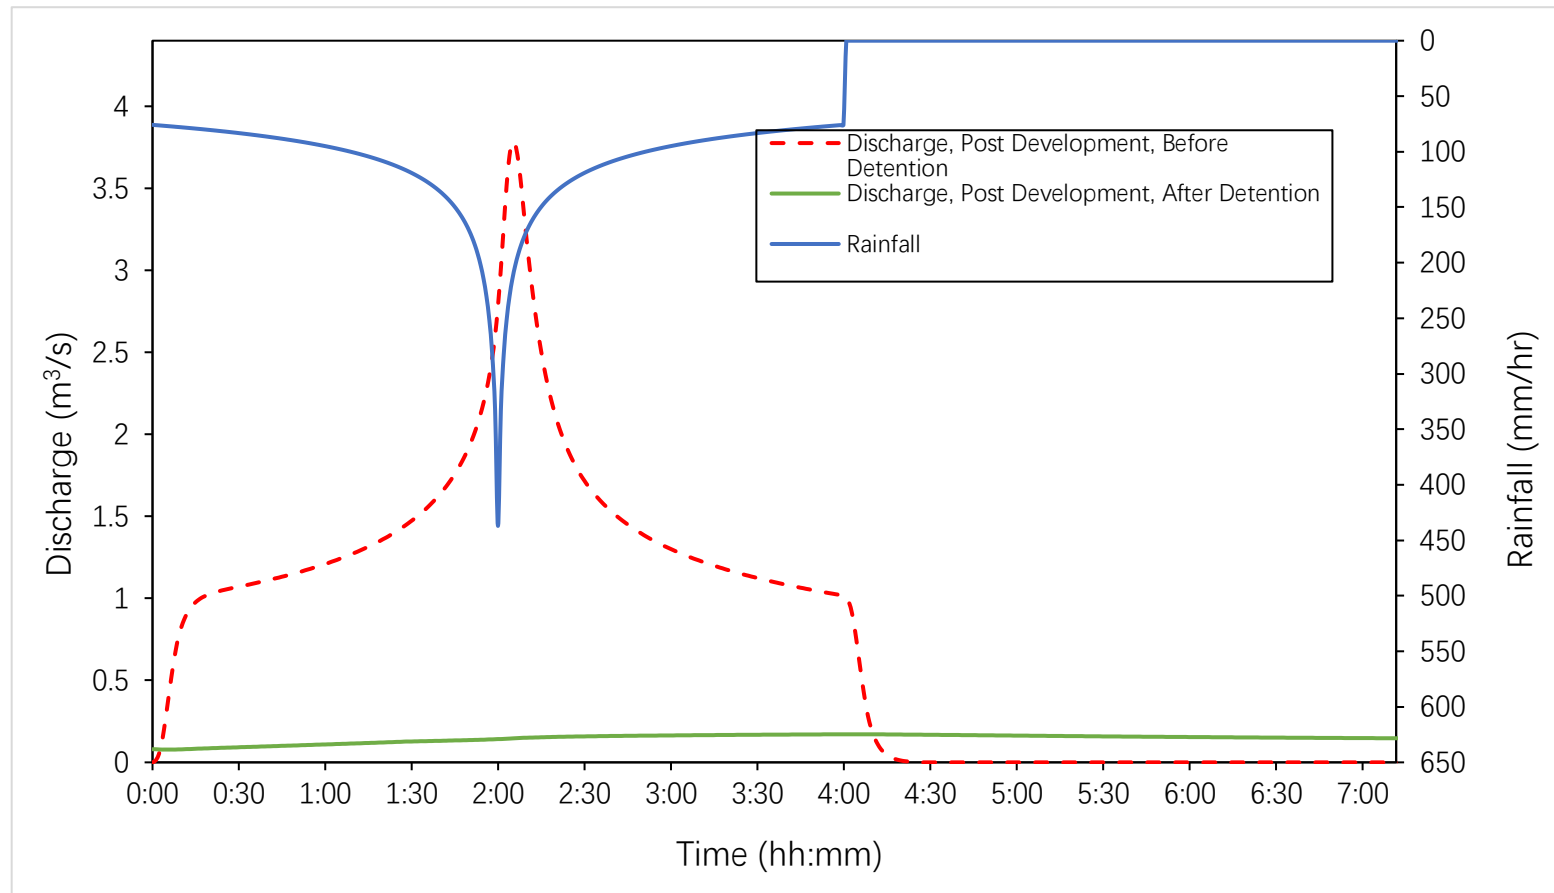


Appendix H

Hydrograph of the Proposed Development


Hydrograph of Proposed Development

2yr Rainstorm Event, AMC3, RF=1.0

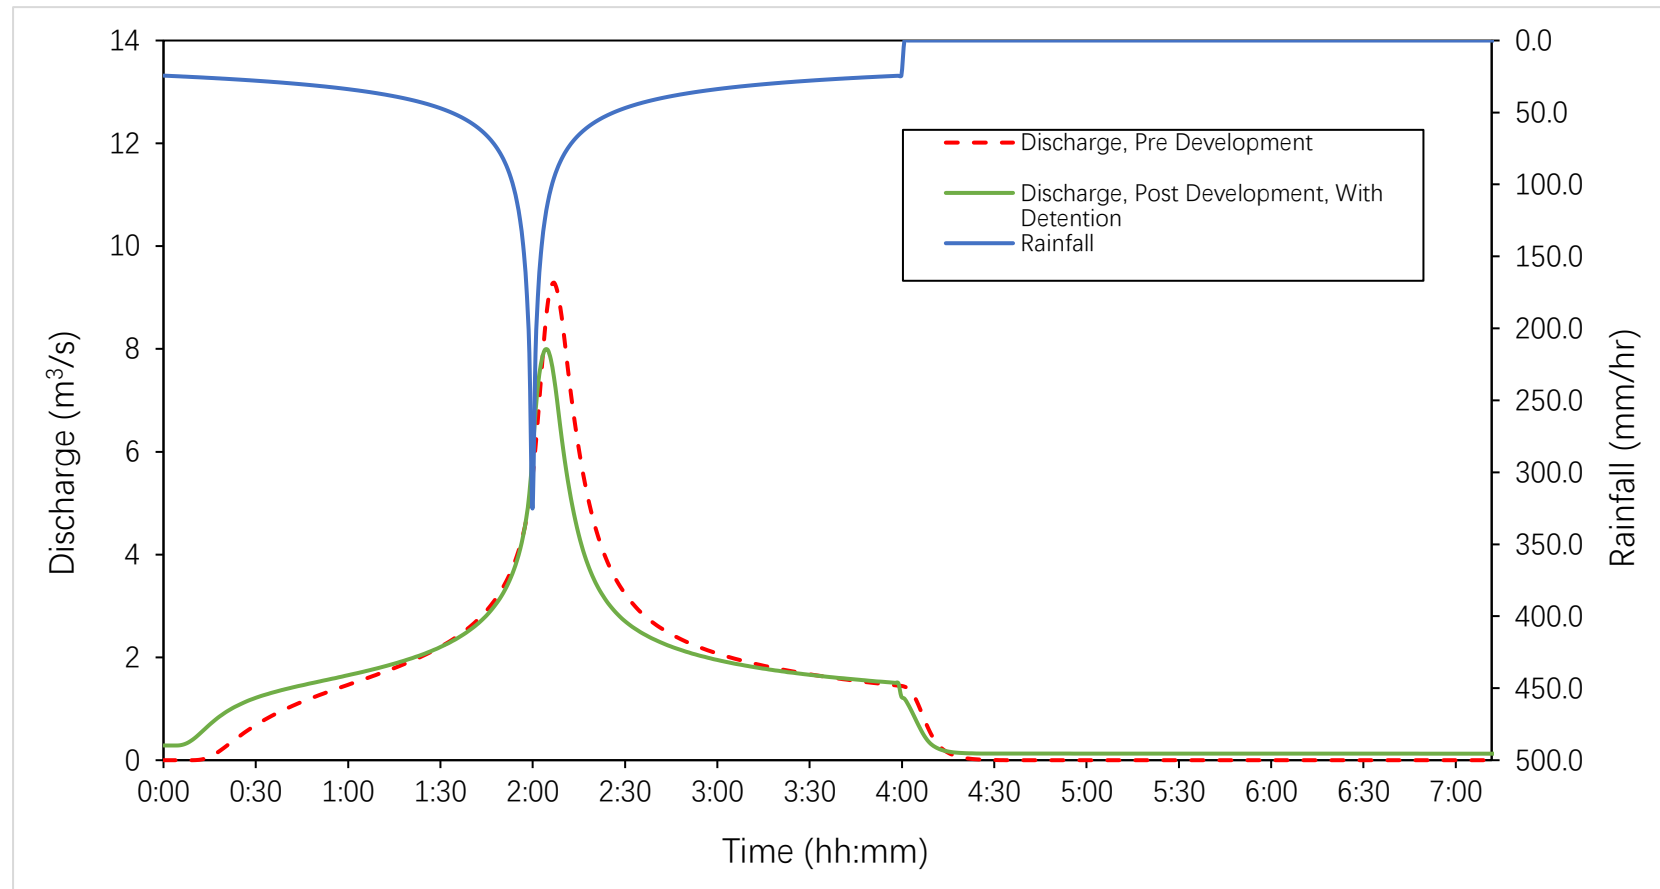


Hydrograph of Proposed Development

10yr Rainstorm Event, AMC3, RF=1.0

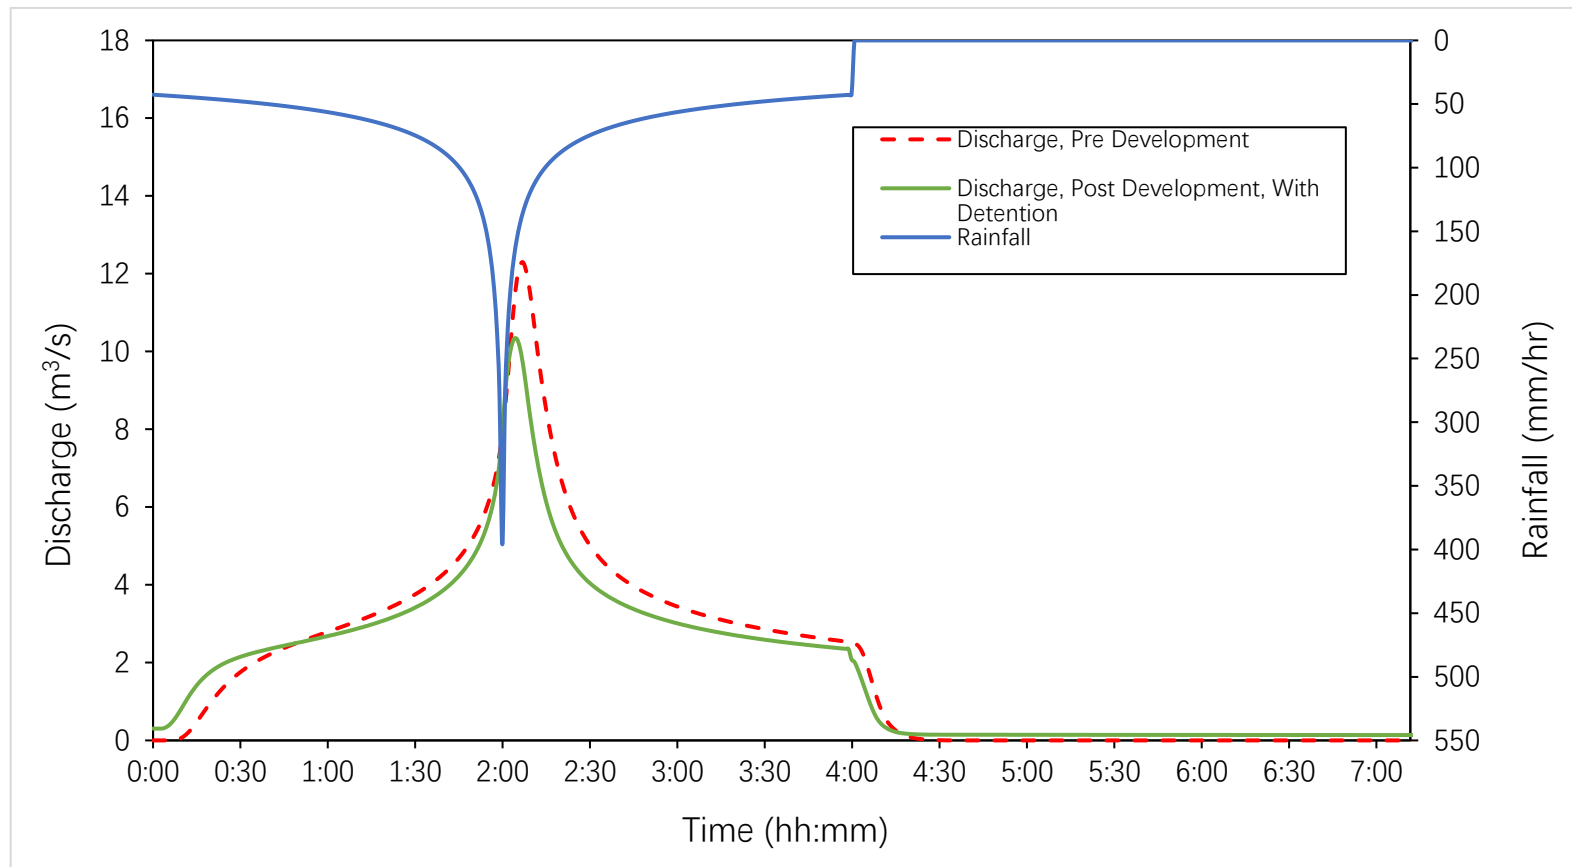


Hydrograph of Proposed Development

50yr Rainstorm Event, AMC3, RF=1.0

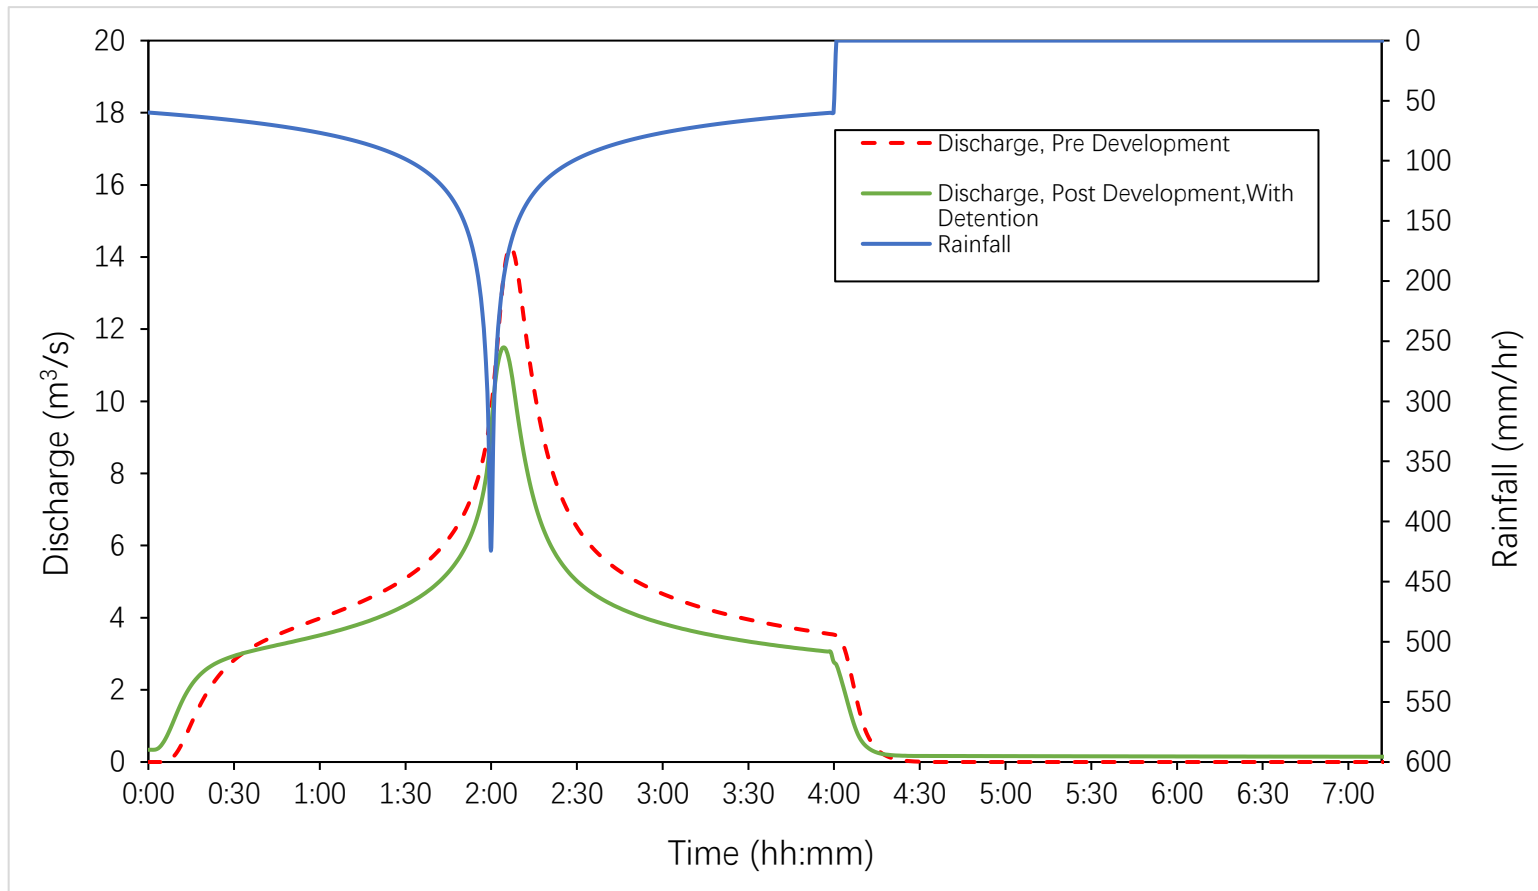

Hydrograph of Proposed Development

200yr Rainstorm Event, AMC3, RF=1.0

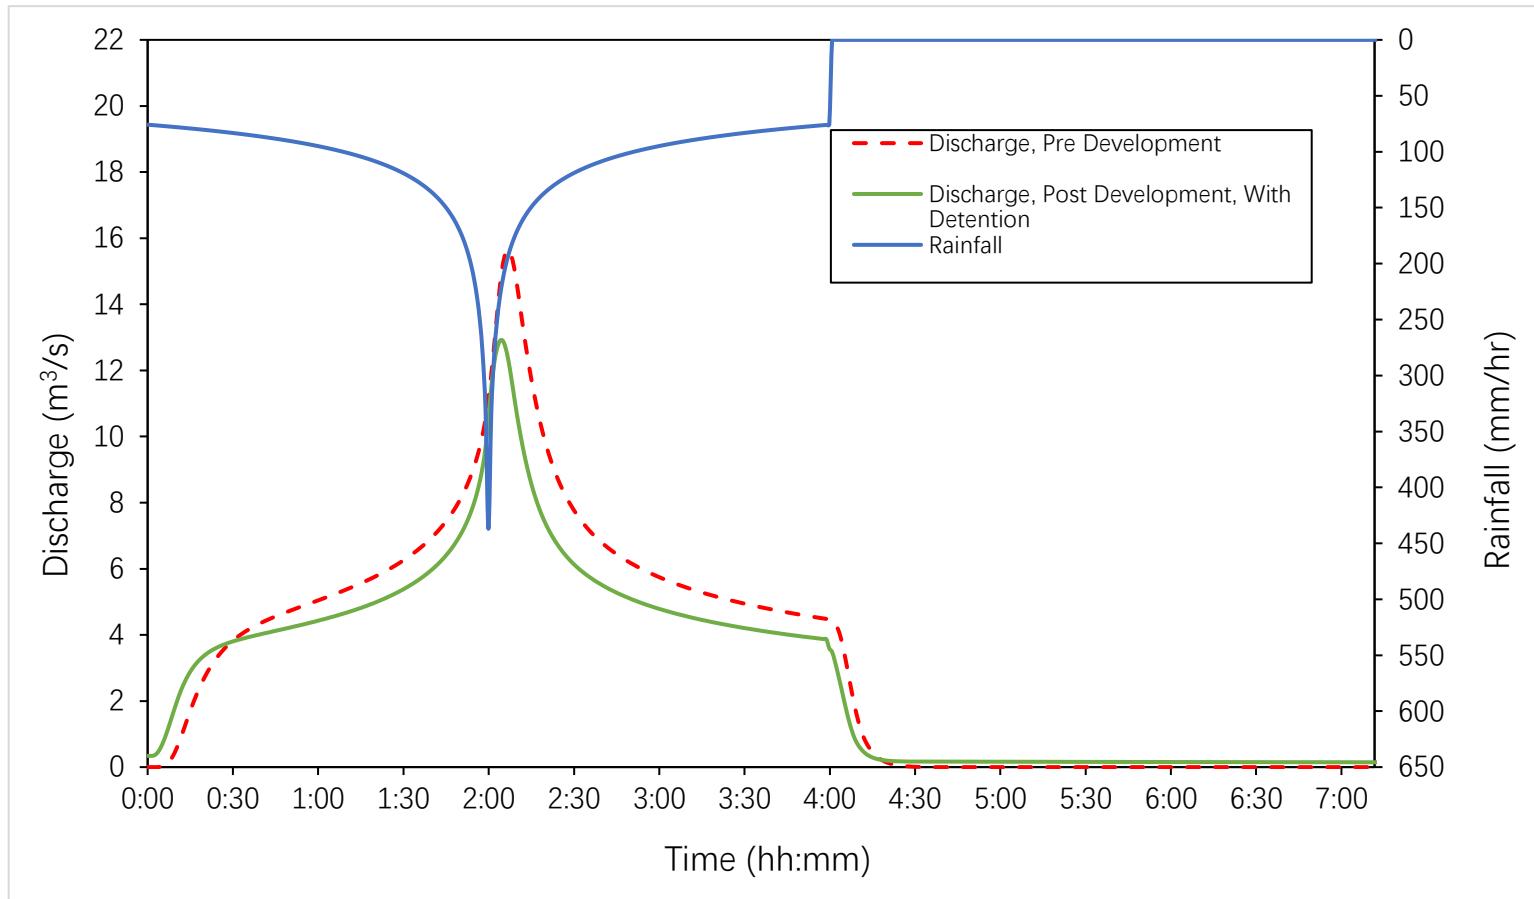

Appendix I

Summary of Hydrodynamic Modelling Results (AMC3, Scenario C)

| Pre-Development (AMC3) | | | | | | | | |
|--|----------|---------------------|-----------|----------------------|-----------|----------------------|------------|-----------------------|
| River Chainage/ Max Water Level (m) | 2c (mPD) | Freeboard for 2c(m) | 10c (mPD) | Freeboard for 10c(m) | 50c (mPD) | Freeboard for 50c(m) | 200c (mPD) | Freeboard for 200c(m) |
| MAI PO 0 | 3.568 | 4.572 | 3.742 | 4.398 | 3.835 | 4.305 | 3.890 | 4.250 |
| MAI PO 490 | 3.562 | 4.578 | 3.738 | 4.402 | 3.830 | 4.310 | 3.883 | 4.257 |
| MAI PO 490 | 3.562 | 4.578 | 3.738 | 4.402 | 3.830 | 4.310 | 3.883 | 4.257 |
| MAI PO 690 | 3.562 | 4.578 | 3.734 | 4.406 | 3.827 | 4.313 | 3.880 | 4.260 |
| MAI PO 690 | 3.562 | 4.578 | 3.734 | 4.406 | 3.827 | 4.313 | 3.880 | 4.260 |
| MAI PO 980 | 3.556 | 4.584 | 3.730 | 4.410 | 3.822 | 4.318 | 3.875 | 4.265 |
| MAI PO 980 | 3.556 | 4.584 | 3.730 | 4.410 | 3.822 | 4.318 | 3.875 | 4.265 |
| MAI PO 1150 | 3.522 | 4.618 | 3.716 | 4.424 | 3.812 | 4.328 | 3.865 | 4.275 |
| MAI PO 1150 | 3.522 | 4.618 | 3.716 | 4.424 | 3.812 | 4.328 | 3.865 | 4.275 |
| MAI PO 1620 | 3.280 | 4.860 | 3.687 | 4.453 | 3.809 | 4.331 | 3.867 | 4.273 |
| MAI PO 1630 | 3.039 | 5.101 | 3.444 | 4.696 | 3.725 | 4.415 | 3.818 | 4.322 |
| MAI PO 1630 | 3.039 | 5.101 | 3.444 | 4.696 | 3.725 | 4.415 | 3.818 | 4.322 |
| MAI PO 1880 | 2.736 | 5.404 | 3.306 | 4.834 | 3.656 | 4.484 | 3.756 | 4.384 |
| MAI PO 1180 | 2.736 | 5.404 | 3.306 | 4.834 | 3.656 | 4.484 | 3.756 | 4.384 |
| MAI PO 2125 | 2.366 | 5.774 | 3.098 | 5.042 | 3.396 | 4.744 | 3.400 | 4.740 |

| Post-Development (AMC3) | | | | | | | | |
|--|----------|----------------------|-----------|----------------------|-----------|----------------------|------------|-----------------------|
| River Chainage/ Max Water Level (m) | 2c (mPD) | Freeboard for 2c (m) | 10c (mPD) | Freeboard for 10c(m) | 50c (mPD) | Freeboard for 50c(m) | 200c (mPD) | Freeboard for 200c(m) |
| MAI PO 0 | 3.548 | 4.592 | 3.732 | 4.408 | 3.835 | 4.305 | 3.890 | 4.250 |
| MAI PO 274 | 3.548 | 4.592 | 3.732 | 4.408 | 3.836 | 4.304 | 3.889 | 4.251 |
| MAI PO 274 | 3.548 | 4.592 | 3.732 | 4.408 | 3.836 | 4.304 | 3.889 | 4.251 |
| MAI PO 336 | 3.548 | 4.592 | 3.732 | 4.408 | 3.834 | 4.306 | 3.889 | 4.251 |
| MAI PO 336 | 3.548 | 4.592 | 3.732 | 4.408 | 3.834 | 4.306 | 3.889 | 4.251 |
| MAI PO 355 | 3.548 | 4.592 | 3.731 | 4.409 | 3.834 | 4.306 | 3.888 | 4.252 |
| MAI PO 355 | 3.548 | 4.592 | 3.731 | 4.409 | 3.834 | 4.306 | 3.888 | 4.252 |
| MAI PO 690 | 3.545 | 4.595 | 3.727 | 4.413 | 3.827 | 4.313 | 3.878 | 4.262 |
| MAI PO 690 | 3.545 | 4.595 | 3.727 | 4.413 | 3.827 | 4.313 | 3.878 | 4.262 |
| MAI PO 980 | 3.537 | 4.603 | 3.722 | 4.418 | 3.822 | 4.318 | 3.874 | 4.266 |
| MAI PO 980 | 3.537 | 4.603 | 3.722 | 4.418 | 3.822 | 4.318 | 3.874 | 4.266 |
| MAI PO 1150 | 3.425 | 4.715 | 3.707 | 4.433 | 3.811 | 4.329 | 3.864 | 4.276 |
| MAI PO 1150 | 3.425 | 4.715 | 3.707 | 4.433 | 3.811 | 4.329 | 3.864 | 4.276 |
| MAI PO 1620 | 3.299 | 4.841 | 3.676 | 4.464 | 3.809 | 4.331 | 3.867 | 4.273 |
| MAI PO 1630 | 3.048 | 5.092 | 3.430 | 4.710 | 3.722 | 4.418 | 3.816 | 4.324 |
| MAI PO 1630 | 3.048 | 5.092 | 3.430 | 4.710 | 3.722 | 4.418 | 3.816 | 4.324 |
| MAI PO 1880 | 2.744 | 5.396 | 3.287 | 4.853 | 3.652 | 4.488 | 3.755 | 4.385 |
| MAI PO 1880 | 2.744 | 5.396 | 3.287 | 4.853 | 3.652 | 4.488 | 3.755 | 4.385 |
| MAI PO 2125 | 2.366 | 5.774 | 3.098 | 5.042 | 3.396 | 4.744 | 3.400 | 4.740 |

Note:

- 1) The Lowest Levee Level from River Chainage from MAI PO 0 to MAIPO 2125 is 8.14mPD.
- 2) Freeboard = The Lowest Levee Level - Max Water Level

Appendix J

Hydraulic Analysis of the Proposed Drainage Pipe Network

Hydraulic Analysis of the Proposed Drainage Pipe Network at

Mai Po 355 (WSW_PIPE01), the location is shown in Figure 6

Extracted from MIKE11 model

Freeboard of Drainage Pipe at Mai Po 355 (WSW_PIPE01 554)

| Design ARI Events | Max water level (mPD) | Freeboard (m) |
|-------------------|-----------------------|---------------|
| 2A | 3.504 | 3.296 |
| 2C | 3.548 | 3.252 |
| 10A | 3.684 | 3.116 |
| 10B | 3.712 | 3.088 |
| 10C | 3.732 | 3.068 |
| 50A | 3.771 | 3.029 |
| 50B | 3.936 | 2.864 |
| 50C | 3.834 | 2.966 |
| 200A | 3.824 | 2.976 |
| 200B | 4.145 | 2.655 |
| 200C | 3.888 | 2.912 |

Note:

- 1) The average ground level of the drainage manhole is approximate 6.8mPD.
- 2) Freeboard = Ground Level - Max Water Level

Appendix K

Hydraulic Analysis of the Proposed 3.5m(W) x 2.5m(H) Box Culvert

**Hydraulic Analysis of the Proposed 3.5m(W) × 2.5m(H) Box Culvert at
MAI PO 274 (WSW_BC01 283), the location is shown in Figure 6**

Extracted from MIKE11 model

Freeboard of Box Culvert at MAI PO 274 (WSW_BC01 283)

| Design ARI Events | Max water level (mPD) | Freeboard (m) |
|--------------------------|------------------------------|----------------------|
| 2A | 3.504 | 3.296 |
| 2C | 3.546 | 3.254 |
| 10A | 3.685 | 3.115 |
| 10B | 3.712 | 3.088 |
| 10C | 3.732 | 3.068 |
| 50A | 3.771 | 3.029 |
| 50B | 3.937 | 2.863 |
| 50C | 3.836 | 2.964 |
| 200A | 3.826 | 2.974 |
| 200B | 4.145 | 2.655 |
| 200C | 3.889 | 2.911 |

Note:

- 1) The average ground level of the box culvert is approximate 6.8mPD.
- 2) Freeboard = Ground Level - Max Water Level

Appendix L

Current Spot Level

