

Appendix 6

Noise Impact Assessment

Prepared for

Free Ocean Investments Limited

Prepared by

Ramboll Hong Kong Limited

**S16 PLANNING APPLICATION PROPOSED MINOR
RELAXATION OF PLOT RATIO AND BUILDING HEIGHT
RESTRICTIONS FOR THE PROPOSED RESIDENTIAL
DEVELOPMENT (FLAT) WITH SHOP AND SERVICES USE AT
LOTS. 531 RP, 532 S.D. RP AND 532 RP IN DD 130 AND THE
ADJOINING GOVERNMENT LAND, LAM TEI, TUEN MUN**

NOISE IMPACT ASSESSMENT REPORT

Date

November 2025

Prepared by

Simon Lai
Senior Environmental Consultant

Signed



Approved by

Billy Fan
Principal Consultant

Signed



Project Reference

ASLLT130EI00

Document No.

R9921_v1.0

No part of this document may be reproduced or transmitted, in any form or by any means electronic, mechanical, photographic, recording or otherwise, or stored in a retrieval system of any nature without the written permission of Ramboll Hong Kong Ltd, application for which shall be made to Ramboll Hong Kong Ltd, 21/F, BEA Harbour View Centre, 56 Gloucester Road, Wan Chai, Hong Kong.

Disclaimer: This report is made on behalf of Ramboll Hong Kong Ltd. No individual is personally liable in connection with the preparation of this report. By receiving this report and acting on it, the client or any third party relying on it accepts that no individual is personally liable in contract, tort or breach of statutory duty (including negligence).

Ramboll Hong Kong Limited

21/F, BEA Harbour View Centre
56 Gloucester Road, Wan Chai, Hong KongTel: (852) 3465 2888
Fax: (852) 3465 2899
Email: hkinfo@ramboll.com

\\aphkfps3\Drive Q\Projects\ASLLT130EI00\04 Deliverables\01 NIA Report\R9921_v1.0.docx

CHAPTERS

	Page
1. INTRODUCTION	1-1
1.1 Project Background	1-1
1.2 Objectives	1-1
1.3 Report Structure	1-2
2. SITE AND PROPOSED DEVELOPMENT	2-1
2.1 Site Location and Its Environs	2-1
2.2 Proposed Development Scheme	2-1
3. ROAD TRAFFIC NOISE IMPACT ASSESSMENT	3-1
3.1 Introduction	3-1
3.2 Assessment Criteria and Guidelines	3-1
3.3 Assessment Methodology	3-1
3.4 Noise Sensitive Receivers	3-1
3.5 Predicted Road Traffic Noise Impact Assessment Results (Base Case Scenario)	3-1
3.6 Proposed Road Traffic Noise Mitigation Measures	3-2
3.7 Road Traffic Impact Assessment Result (Mitigated Case Scenario)	3-3
3.8 Conclusion	3-3
4. RAILWAY NOISE IMPACT ASSESSMENT	4-1
4.1 Introduction	4-1
4.2 Assessment Criteria and Guidelines	4-1
4.3 Environmental Condition and Railway Operational Characteristics	4-1
4.4 Assessment Methodology	4-2
4.5 Noise Sensitive Receivers	4-3
4.6 Railway Noise Impact Assessment Results (Base Case Scenario)	4-3
4.7 Proposed Railway Noise Mitigation Measures	4-3
4.8 Railway Noise Impact Assessment Results (Mitigated Case Scenario)	4-4
4.9 Conclusion	4-4
5. FIXED NOISE IMPACT ASSESSMENT	5-1
5.1 Introduction	5-1
5.2 Criteria and Guidelines	5-1
5.3 Assessment Methodology	5-1
5.4 Identification of Fixed Noise Sources	5-2
5.5 Noise Sensitive Receivers	5-2
5.6 Assessment Result without Noise Mitigation Measures (Base Scenario)	5-3
5.7 Impact due to Future Fixed Noise Sources of the Proposed Development	5-3
5.8 Conclusion	5-3
6. CONCLUSION	6-1

TABLES

Table 2.1	Development Schedule of the Proposed Development	2-1
Table 4.1	Acceptable Railway Noise Levels for NSRs.....	4-1
Table 4.2	Adopted Source Terms for CadnaA.....	4-2
Table 5.1	Acceptable Railway Noise Levels for NSRs.....	5-1

FIGURES

Figure 2.1	Application Site Location and Its Environs
Figure 3.1	Locations of Representative Noise Sensitive Receivers for Road Traffic Noise Impact Assessment
Figure 3.2	Proposed Road Traffic Noise Mitigation Measures
Figure 4.1	Applicable Area Sensitivity Rating for Individual Facades
Figure 4.2	Locations of the Identified Rail Track within 300m Assessment Area
Figure 4.3	Locations of Representative Noise Sensitive Receivers for Railway Noise Impact Assessment
Figure 4.4	Proposed Railway Noise Mitigation Measures
Figure 5.1	Locations of Identified Fixed Noise Sources for Fixed Noise Impact Assessment
Figure 5.2	Locations of Representative Noise Sensitive Receivers for Fixed Noise Impact Assessment
Figure 6.1	Proposed Overall Noise Mitigation Measures

APPENDICES

Appendix 2.1	Master Layout Plan, Floor Plans and Section Plan of the Proposed Development
Appendix 3.1	Traffic Forecast of Year 2046
Appendix 3.2	Predicted Road Traffic Noise Impact Assessment Results (Base Case Scenario)
Appendix 3.3	Proposed Acoustic Window (Baffle Type) and Enhanced Acoustic Balcony (Baffle Type)
Appendix 3.4	Referenced Configurations of Acoustic Window (Baffle Type) and Enhanced Acoustic Balcony (Baffle Type)
Appendix 3.5	Predicted Road Traffic Noise Impact Assessment Results (Mitigated Case Scenario)
Appendix 3.6	Schedule of Road Traffic Noise Mitigation Measures
Appendix 4.1	Information Extracted from Approved EA report for Approved Rezoning Application (Application No.: Y/TM-LTYY/11)
Appendix 4.2	Information Extracted from Approved EA report for Approved EIA report for Development at San Hing Road and Hong Po Road, Tuen Mun (AEIAR-227/2020)

Appendix 4.3	Details of Derivation of Model Inputs
Appendix 4.4	Predicted Railway Noise Impact Assessment Result (Base Case Scenario)
Appendix 4.5	Predicted Railway Noise Impact Assessment Result (Mitigated Case Scenario)
Appendix 4.6	Proposed Railway Noise Mitigation Measures Schedule
Appendix 5.1	Information Extracted from Approved EA report for Approved Rezoning Application (Application No.: Y/TM-LTTY/11)
Appendix 5.2	On-Site Survey for Verification of Fixed Noise Sources
Appendix 5.3	Detailed Fixed Noise Impact Assessment
Appendix 6.1	Proposed Overall Noise Mitigation Measures Schedule

1. INTRODUCTION

1.1 Project Background

- 1.1.1 This Planning Application is prepared and submitted on behalf of Free Ocean Investments Limited ("the Applicant") to seek approval from the Town Planning Board ("TPB") under Section 16 of the Town Planning Ordinance for the Proposed Minor Relaxation of Plot Ratio and Building Height Restriction for the Residential Development with Shop and Services at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and adjoining Government Land in Lam Tei ("Application Site"/the "Site"). The Application Site falls within "Commercial" ("C") zone and area shown as Road on the Draft Lam Tei and Yick Yuen Outline Zoning Plan ("Draft OZP") No. S/TM-LTTY/13.
- 1.1.2 TPB approved a similar application for minor relaxation of Plot Ratio and Building Height Restrictions for a proposed residential development with shop and services at the Site (TPB Ref.: A/TM-LTTY/426) on 24 June 2022. In order to support the planning application, a Noise Impact Assessment Report (the Approved NIA Report) has been submitted and approved by Environmental Protection Department. Subsequent to the approval of the aforementioned planning application, the Applicant has lodged the land exchange application to the Lands Department to kick-start the approved development. For better management of the residual unmanned land near the Site, and as negotiated with the Lands Department, the Application Site has been modified to include the unmanned land and road works in relation to the proposed run in/out for the Proposed Residential Development. Whilst the resultant development scheme involves material changes to the approved scheme, a fresh Section 16 Planning Application is therefore required.
- 1.1.3 Ramboll Hong Kong Limited is commissioned to conduct a Noise Impact Assessment (NIA) for the support of the planning application.

1.2 Objectives

- 1.2.1 This NIA covers the following aspects:
- i. Assess the potential railway noise impacts generated from Tuen Ma Line (TML) (previously known as West Rail Line (WRL)) and Light Rail Transit (LRT) on the representative Noise Sensitive Receivers (NSRs) for the latest Master Layout Plan (MLP) of the proposed development;
 - ii. Assess the fixed noise / industrial noise impacts associated with the surrounding temporary industrial uses on the representative NSRs for the latest MLP of the proposed development;
 - iii. Assess the potential road traffic noise impact from roads within 300 m from the Development Boundary of the Application Site on the NSRs for the latest MLP of the proposed development;
 - iv. To propose noise mitigation measures for mitigating the railway noise impact in order to comply with the standards of the Hong Kong Planning Standards and Guidelines (HKPSG) and *"Technical Memorandum for the Assessment of Noise from Places Other Than Domestic Premises, Public Spaces or Construction Sites"* (IND-TM)

- v. To review and update the noise mitigation measures proposed in Approved NIA report of the S16 Planning Application (Application No.: A/TM-LTTY/426) for mitigating the traffic noise impact in order to comply with the standards of the HKPSG.

1.3 Report Structure

1.3.1 The remaining chapters of this report are shown below:

Section 2 – Site and Proposed Development

Section 3 – Road Traffic Noise Impact Assessment

Section 4 – Railway Noise Impact Assessment

Section 5 – Fixed Noise Impact Assessment

Chapter 6 – Conclusion

2. SITE AND PROPOSED DEVELOPMENT

2.1 Site Location and Its Environs

- 2.1.1 The Application Site is currently vacant and situated at San Hing Tsuen, Lam Tei bounded by Castle Peak Road – Lam Tei Section to the southeast, TML viaduct and LRT tracks to the northwest. To the north is the existing residential development, Lingrade Garden separated by an open space. Some temporary carparks and the village houses are located to the west of the Application Site separated by a nullah. The Application Site area is about 2,200 m². The Application Site Location and its environs are shown in **Figure 2.1**.

2.2 Proposed Development Scheme

- 2.2.1 The proposed development consists of one 20-storey residential tower with car parking, landscape gardens and shop. The development schedule of the proposed development is listed in **Table 2.1**.

Table 2.1 Development Schedule of the Proposed Development

Floor	Uses
G/F	Car parking, E/M Plant Rooms, Lobby, Landscaping Area and Shop
1/F	Car parking and E/M Plant Room
2/F	Recreational Facilities
3/F – 19/F	Residential Units

- 2.2.2 The updated master layout plan, typical floor plan and sectional view are presented in **Appendix 2.1**.
- 2.2.3 As mentioned above, the Application Site is located between Castle Peak Road – Lam Tei Section and TML viaduct. Setbacks of the proposed development from Castle Peak Road – Lam Tei Section and TML should be maintained as far as practicable. With the design of non-noise sensitive uses (such as car parking, E/M Plant Rooms, landscaping area, recreational facilities, etc.) on G/F to 2/F, longer distances between the noise sensitive receivers of the residential units and Castle Peak Road – Lam Tei Section, TML and viaduct and LRT tracks can be provided in order to reduce the noise impacts from the road, TML and LRT.

3. ROAD TRAFFIC NOISE IMPACT ASSESSMENT

3.1 Introduction

- 3.1.1 The proposed development is noise sensitive and subject to traffic noise impact from the surrounding roads during the operational stage. This section aims to assess the noise impacts and propose mitigation measures, where necessary, to reduce the road traffic noise impact to comply with relevant standard.

3.2 Assessment Criteria and Guidelines

- 3.2.1 Noise standards are recommended in Chapter 9, "Environment", of the Hong Kong Planning Standards and Guidelines (HKPSG) for planning against possible noise impact from road traffic.
- 3.2.2 For the Proposed Development, only dwellings will rely on openable window for ventilation purpose. The clubhouse and the shop will be provided with air-conditioning system and will not be provided with any openable windows / openings for ventilation.
- 3.2.3 According to the guidelines, the criterion for road traffic noise impact on domestic premises (habitable rooms) is $L_{10(1\text{-hour})}$ 70dB(A). This criterion applies to uses which rely on openable windows for ventilation.

3.3 Assessment Methodology

- 3.3.1 In this assessment, the potential noise impact arising from nearby existing and future road carriageways on the proposed development has been assessed. It involved the prediction of future noise impacts on Noise Sensitive Receivers (NSRs) arising from traffic flows along existing and future road carriageways situated in the vicinity of the Application Site. Calculation of predicted road traffic noise was based on the worst case peak hour traffic flows projected within a 15-year period from the target completion date (i.e. Year 2046) of the proposed development. For worst-case scenario evaluation, the assessment year was chosen to be year 2046, which has the maximum forecasted traffic flow within the 15-year period. The year 2046 traffic forecast data is prepared by project traffic consultant and attached in **Appendix 3.1**. Endorsement of the traffic forecast from Transport Department will be provided once available.
- 3.3.2 The U.K. Department of Transport's procedure "Calculation of Road Traffic Noise" (CRTN) has been applied to predict the hourly $L_{10(1\text{-hour})}$ noise levels generated from road traffic at selected representative NSRs. Practicable environmental mitigation measures have been recommended, where necessary. The predicted noise levels were compared with the relevant HKPSG noise criterion (i.e. $L_{10(1\text{-hour})}$ 70dB(A)).

3.4 Noise Sensitive Receivers

- 3.4.1 All residential dwellings with openable windows/doors of habitable room (noise sensitive use) intended for prescribed ventilation purposes have been assigned assessment points. All assessment points were taken at 1.2m above the floor and 1m away from the facade of openable windows in rooms of sensitive use (living rooms and bedrooms). **Figure 3.1** shows the locations of the NSRs for road traffic noise impact assessment.

3.5 Predicted Road Traffic Noise Impact Assessment Results (Base Case Scenario)

- 3.5.1 As mentioned in **Section 2.2.3**, setback of the proposed development from Castle Peak Road – Lam Tei Section has been maintained as far as practicable. The noise sensitive receivers of the residential units have been located further way from Castle

Peak Road – Lam Tei Section as far as practicable with the provision of the design of non-noise sensitive uses (such as car parking, E/M Plant Rooms, landscaping area, recreational facilities, etc.) on G/F to 2/F in order to reduce the road traffic noise impact from the road. The base case scenario is defined as the scheme to reflect the aforementioned design but without further direct noise mitigation measures.

- 3.5.2 According to the predicted noise level for the base case scenario, road traffic noise exceedances are found at the location close to Castle Peak Road – Lam Tei Section. Noise mitigation measures are therefore recommended for the proposed development based on this scenario to attenuate the road traffic noise impact.
- 3.5.3 There are 238 out of 336 residential flat units with noise exceedance at the Application Site, equivalent to a compliance level of 29%. The maximum predicted road traffic noise level for residential flat is $L_{10(1\text{-hour})}$ 81 dB(A). AM peak scenario is represented as the worst case scenario. Detailed result is presented in **Appendix 3.2**. Noise mitigation measures are therefore recommended for the proposed development based on this scenario to attenuate the road traffic noise impact.

3.6 Proposed Road Traffic Noise Mitigation Measures

- 3.6.1 The following noise mitigation measures have been considered and adopted where appropriate. The noise mitigation measures incorporated into the building layout design (including podium) were assessed.

1.5m High Solid Wall

- 3.6.2 The application of 1.5m high solid walls are proposed on 3/F to reduce road traffic noise impact from Castle Peak Road – Lam Tei Section to the NSRs at lower levels. The solid walls have been included in the road traffic noise model.

Enhanced Acoustic Balcony (Baffle Type) [EAB(BT)]

- 3.6.3 "Application of Innovative Noise Mitigation Designs in Planning Private Residential Developments against Road Traffic Noise Impact" (ProPECC PN 5/23) issued by EPD is referred in this planning application. For EAB(BT) with solid parapet at the front (and 70% permeability fence on the side), sound absorptive material (SAM) applied at balcony ceiling, and inner sliding door with gap width of 100mm and overlapping length of at least 100mm, a noise reduction of 8 dB(A) and 9 dB(A) are achievable with reference to room area of 14 m² and 18 m² respectively. Further, addition of SAM of Noise Reduction Coefficient (NRC) ≥ 0.7 at top and outer opening side of the mullion can offer an additional 1.5 dB(A) reduction. Altogether, 9.5 dB(A) (for room area of 14 m²) is assumed as the maximum noise reduction and adopted in this study for habitable room of residential tower using EAB(BT).

Acoustic Window (Baffle Type) [AW(BT)]

- 3.6.4 According to ProPECC PN 5/23, there are configurations of AW(BT) with opening of around 0.5 m² (600mm x 870mm) and 1.1 m² (750mm x 1500mm), inner sliding door with gap width of 100mm to 175mm and overlapping length of at least 100mm with the referenced room area of 8m² and 18m². Noise reduction of 6 dB(A) and 7dB(A) are achievable. Further, addition of SAM of NRC ≥ 0.7 at top and outer opening side of the mullion can offer an additional 1.5 dB(A). Moreover, additional 1 dB(A) reduction can offer for tilting the AW(BT) with not less than 30° horizontal incident angle to the dominant line source. Additional 1 dB(A) and 2 dB(A) reduction can offer for adding 1.5m long full-height noise effective fin while tilting not less than 30 degree and not less than 60 degree respectively. Altogether, 11.5 dB(A) is assumed as the maximum noise reduction and adopted in this study for habitable room of residential towers using AW(BT).

- 3.6.5 The design of these innovative measures is shown in **Appendix 3.3**. The configuration of noise reduction of these innovative measures and noise reduction after adjustment for improvement measures, room size, etc. are shown in **Appendix 3.4**.

Acoustic Fin and Sound Absorption Material

- 3.6.6 In order to further reduce the view angle between the noise sensitive receivers and the major carriageways and in turn road traffic noise impact, acoustic fins of 0.2m(L) to 1.5m(L) are proposed to mitigate the adverse noise impact. Sound absorption material (SAM) would also be applied to the surface of acoustic fins adjacent to ventilation opening to avoid multi-reflection effects. Noise reduction due to use of vertical fin is determined based on approach of CRTN but capped to not more than 3 dB(A).

Sound Absorption Material

- 3.6.7 It is noted that some NSRs are located with reflective façade surface nearby (e.g. just aside a façade/fin surface), and hence inducing possible multiple noise reflection effect. In order to avoid the potential multiple noise reflection effect at NSRs, sound absorptive material (SAM) is proposed to the building façade at the surface facing the opening where necessary.

3.7 Road Traffic Impact Assessment Result (Mitigated Case Scenario)

- 3.7.1 According to the assessment result under mitigated scenario in **Appendix 3.5**, the predicted results at all NSRs could comply with relevant standard. No adverse road traffic noise impact on the proposed development is anticipated. A schedule of noise mitigation measures is shown in **Appendix 3.6**. It is worth noted that this exercise aims to demonstrate the technical feasibility of minimising road traffic noise impact. The type and extent of noise mitigation measures are subject to finetuning in future.

3.8 Conclusion

- 3.8.1 Road traffic noise impact assessment has been carried out for the proposed development.
- 3.8.2 All practical and effective noise mitigation measures have been explored, which include setback, 0.2m - 1.5m acoustic fins with sound absorption material, acoustic window (baffle type), enhanced acoustic balcony (baffle type), 1.5m high solid wall, self-closing door, fixed glazing with maintenance window and sound absorption material.
- 3.8.3 With the implementation of the proposed mitigation measures, the road traffic noise compliance level of the residential flats would be increased from 29% (base case scenario) to 100% (mitigated case scenario). No exceedance is found when adopting the proposed noise mitigation measures. No adverse road traffic noise impact is anticipated to the proposed development.

4. RAILWAY NOISE IMPACT ASSESSMENT

4.1 Introduction

- 4.1.1 The proposed development is noise sensitive and subject to potential railway noise from Tuen Ma Line (TML) and Light Rail Transit (LRT) during the operational stage. This section aims to assess the railway noise impacts and propose mitigation measures, where necessary, to reduce the railway noise impact to comply with relevant standards.

4.2 Assessment Criteria and Guidelines

- 4.2.1 The railway noise impacts from TML or LRT operations are governed by the "Technical Memorandum on Noise from Places other than Domestic Premises, Public Places or Construction Sites" (IND-TM) issued under the Noise Control Ordinance (NCO).
- 4.2.2 According to the IND-TM, the airborne noise shall comply with the Acceptable Noise Level (ANL) which depends on the Area Sensitivity Rating (ASR).
- 4.2.3 As mentioned in **Section 2.1.1**, the Application Site is bounded by the Castle Peak Road – Lam Tei Section located to east of the Application Site. According to "Annual Traffic Census" issued by Transport Department (TD) from Year 2023, the annual average daily traffic flow of Castle Peak Road – Lam Tei Section is in excess of 30,000. Therefore, Castle Peak Road – Lam Tei Section is considered as an Influencing Factor (IF) in accordance with the IND-TM.
- 4.2.4 As the area around the Application Site is being developed including the proposed development area at San Hing Road and Hong Po Road and the site at Residential (Group A) Zone (2), the type of area for the Application Site is considered as "Type (iv) Area other than those above" which will be affected by the Influencing Factors (IFs), the area sensitivity rating of the assessment points facing the Castle Peak Road – Lam Tei Section is defined as "C". For the Noise Sensitive Receivers (NSRs) facing the TML/ LRT, it will be indirectly affected/ not affected by the IFs and the area sensitivity rating is defined as "B". The noise standards for the railway noise is tabulated in **Table 4.1** below. The applicable ASR for each

Table 4.1 Acceptable Railway Noise Levels for NSRs

Time Period	ANL in IND-TM, Leq(30min), dB(A)	
	ASR "B"	ASR "C"
Day and Evening (0700 to 2300 hours)	65	70
Night (2300 to 0700 hours)	55	60

- 4.2.5 Besides the IND-TM, the Hong Kong Planning Standards and Guideline (HKPSG) also provides planning noise standards of 65 dB(A) Leq(24-hour) and 85 dB(A) Lmax (2300 to 0700 hours) for assessing railway noise impact.
- 4.2.6 ANL for night-time (i.e. 55 dB(A) for ASR"B" and 60 dB(A) for ASR"C") is basically regarded as the most stringent criterion. Should the ANL of 55 dB(A) for ASR"B" and 60 dB(A) for ASR"C" for night-time period be complied with, all other noise criteria as mentioned above should be met.

4.3 Environmental Condition and Railway Operational Characteristics

- 4.3.1 The Application Site is situated in close proximity to TML and LRT. The railway line of TML in the vicinity is in the form of twin viaduct, which is about 19m aboveground.

For twin viaduct, there are parapets on two sides but no barrier structure between 2 railway line. In addition to the standard parapet wall, it is observed that a section of railway line is covered by a noise enclosure. The section of LRT near Lam Tei LRT Station is at-grade.

- 4.3.2 The operational information for TML and LRT is referred to the information from MTRC extracted from the Approved EA report for Approved Rezoning Application (Application No.: Y/TM-LTTY/11). The extracted correspondences from MTRC are provided in **Appendix 4.1**.

4.4 Assessment Methodology

- 4.4.1 Railway noise impact arisen from TML and LRT has been predicted with reference to "Calculation of Railway Noise (1995)" published by the UK Department of Transport. A noise prediction software, CadnaA, is used to model and predict the railway noise impact. For TML, the source term information is based on the Approved EIA report for Development at San Hing Road and Hong Po Road, Tuen Mun (AEIAR-227/2020). The extracted information is provided in **Appendix 4.2**. For LRT, the source term information is based on the Approved EA report for Approved Rezoning Application. The extracted information is provided in **Appendix 4.1**. Applying with relevant correction factors and operation parameters, the train noise source terms are derived as the model inputs (in terms of Leq (30min) and Leq (24hr)) to CadnaA are summarised in **Table 4.2**. The details of the derivation of the model inputs are shown in **Appendix 4.3**.

Table 4.2 Adopted Source Terms for CadnaA

Noise Source Term	TML Northbound	TML Southbound	LRT Northbound	LRT Southbound
Leq (30min) – Day & Evening Time Periods	66.3 dB(A)	65.6 dB(A)	LN4: 63.3 dB(A) LN5: 67.3 dB(A) LN6-LN8: 62.6 dB(A) LN9-LN15: 65.3 dB(A)	LS4: 60.1 dB(A) LS5: 61.8 dB(A) LS6-LS8: 57.2 dB(A) LS9-LS15: 62.9 dB(A)
Leq (30min) – Night-Time Period	64.9 dB(A)	64.3 dB(A)	LN4: 63.9 dB(A) LN5: 67.9 dB(A) LN6-LN8: 63.2 dB(A) LN9-LN15: 65.9 dB(A)	LS4: 60.7 dB(A) LS5: 62.4 dB(A) LS6-LS8: 57.8 dB(A) LS9-LS15: 63.5 dB(A)
Leq (24hr)	62.1 dB(A)	61.4 dB(A)	LN4: 60.8 dB(A) LN5: 64.8 dB(A) LN6-LN8: 60.1 dB(A) LN9-LN15: 62.8 dB(A)	LS4: 57.6 dB(A) LS5: 59.3 dB(A) LS6-LS8: 54.7 dB(A) LS9-LS15: 60.4 dB(A)

Noise Source Term (Structure-reradiated Noise)	TML Non-Enclosed Structure-reradiated Noise	TML Fully-Enclosed Structure-reradiated Noise	LRT Non-Enclosed Structure reradiated Noise
Leq (30min) – Day & Evening Time Periods	47.7 dB(A)	51.9 dB(A)	45.0 dB(A)
Leq (30min) – Night-Time Period	46.4 dB(A)	50.6 dB(A)	45.2 dB(A)
Leq (24hr)	43.6 dB(A)	47.8 dB(A)	42.4 dB(A)

- 4.4.2 For TML, the data of Lmax from the Approved EIA report has been referred and adopted. The extracted information is provided in **Appendix 4.2**. For LRT, the data of Lmax from the Approved EA report has been referred and adopted. The extracted information is provided in **Appendix 4.1**. The prediction of the Lmax at the noise sensitive receivers has been considered poor track correction (or track deterioration correction) (+3.0dB(A)), façade correction (+2.5dB(A)), and air absorption correction ($C_{air} = 0.2 - 0.008 \times d$ where d = distance between segment and receiver).

4.5 Noise Sensitive Receivers

- 4.5.1 The proposed development itself is considered as noise sensitive receiver (NSR) given that the noise sensitive rooms such as living/dining rooms and bedrooms will rely on opened windows for ventilation which will be subject to railway noise impact. Representative NSRs have been selected to assess the railway noise impact. Other NSRs have no line of sight to TML or LRT have not been selected due to the blockage by structure of the residential tower of the proposed development. The NSRs are selected at 1m away from the façade of the openable window/door opening at 1.2m above the floor slab of the unit. Locations of the representative NSRs are shown in **Figure 4.3**.

4.6 Railway Noise Impact Assessment Results (Base Case Scenario)

- 4.6.1 The noise sensitive receivers of the residential units have been located further way from LRT as far as practicable with the provision of the design of non-noise sensitive uses (such as car parking, E/M Plant Rooms, landscaping area, recreational facilities, etc.) on G/F to 2/F in order to reduce the railway noise impact from LRT. In addition, the noise enclosure of the viaduct of TML has also been included in the noise model. The base case scenario is defined as the scheme to reflect the aforementioned design and the noise enclosure of the viaduct.
- 4.6.2 The railway noise impact assessment result under base case scenario is summarized in **Appendix 4.4**. According to the result, exceedances are found for $Leq(30min)$ during night time. The maximum predicted noise level for $Leq(30min)$ during night time is are up to 58dB(A).

4.7 Proposed Railway Noise Mitigation Measures

Fixed Glazing with or without Maintenance Window

- 4.7.1 For those window façade that are not necessary to serve ventilation purpose yet exposed to adverse railway noise, Fixed Glazing with or without Maintenance Window is proposed. The fixed glazing will be equipped with well gasketed maintenance window, if any, and a removable handle or key lock system to ensure the maintenance window remains locked except for cleaning and maintenance purpose.

Acoustic Window / Enhanced Acoustic Balcony (Baffle Type) (AW(BT) / EAB(BT))

- 4.7.2 Innovative noise mitigation measures are being explored in recent years. Acoustic window (baffle type) and enhanced acoustic balcony (baffle type) have been adopted for numerous residential developments for attenuating road traffic noise. In general, AW(BT) and EAB(BT) consist of two layers of window/ door with openings at offset location to reduce noise penetrating into the units.
- 4.7.3 Since EPD's Practice Note on Application of Innovative Noise Mitigation Designs in Planning Private Residential Developments against Road Traffic Noise Impact (hereafter referred as "EPD-PN") provides noise reduction level with respect to road traffic noise only, the purchaser intends to design the AW(BT) and EAB(BT) to mitigate the railway noise impact. The mock-up test will be conducted at the project early stage

for assessment purpose (with some buffer during design stage), and conduct commissioning test before occupation. It is noted that details of AW(BT) and EAB(BT) specific to the Proposed Development will be designed later and a mock-up test for the specific design will be conducted to demonstrate the noise reduction effectiveness. The relevant testing methodology will be submitted to EPD for review before conducting the mock-up test.

- 4.7.4 The proposed railway noise mitigation measures are shown in **Figure 4.4**.

4.8 Railway Noise Impact Assessment Results (Mitigated Case Scenario)

- 4.8.1 The predicted noise level at the representative NSRs for mitigated case scenario is presented in **Appendix 4.5**. The noise reduction of the AW(BT) and EAB(BT) is assumed -3 dB(A) in the assessment. With the proposed mitigation measures in place, all NSRs comply with railway noise standard. No exceedance is found. Proposed railway noise mitigation measures schedule is summarized in **Appendix 4.6**.

4.9 Conclusion

- 4.9.1 Railway noise impact assessment has been carried out for the proposed development.
- 4.9.2 Practical and effective noise mitigation measures have been explored, which include building setback, podium, fixed glazing with or without maintenance window, acoustic window (baffle type) and enhanced acoustic balcony (baffle type).
- 4.9.3 After mitigation, the railway noise impact assessment result reveals that all noise sensitive receivers would comply with the railway noise standard. Therefore, the proposed development would not subject to any adverse railway noise impact.
- 4.9.4 The applicant will design the AW(BT) and EAB(BT) to mitigate the noise impact. The mock-up test will be conducted at the project early stage for assessment purpose (with some buffer during design stage), and conduct commissioning test before occupation. The relevant testing methodology will be submitted to EPD for review before conducting the mock-up test. Sufficient buffer will be provided during mock-up test, which the exact configuration and attenuation will be included in the mock-up test report for agreement. Updated noise impact assessment based on mock-up test result will be submitted afterwards.

5. FIXED NOISE IMPACT ASSESSMENT

5.1 Introduction

- 5.1.1 The proposed development is noise sensitive and subject to potential fixed noise from surrounding sites for car repairing and storage uses (if any) during the operational stage. This section aims to assess the fixed noise impact and propose mitigation measures, where necessary.

5.2 Criteria and Guidelines

- 5.2.1 Under the Noise Control Ordinance (NCO), noise criteria for fixed noise sources are stipulated in the "Technical Memorandum for the Assessment of Noise from Places other than Domestic Premises, Public Places or Construction Sites" (IND-TM).
- 5.2.2 Based on the classification in the IND-TM, the Area Sensitive Rating of "B" is applicable where the identified NSRs are indirectly affected/ not affected by IF (i.e. Castle Peak Road – Lam Tei Section) and Area Sensitive Rating of "C" is applicable where the identified NSRs are directly affected by IFs in the type of area considered as "Type (iv) Area other than those above". Therefore, the noise standards for this fixed noise impact assessment as tabulated in **Table 5.1** should be followed.

Table 5.1 Acceptable Railway Noise Levels for NSRs

Time Period	ANL in IND-TM, Leq(30min), dB(A)	
	ASR "B"	ASR "C"
Day and Evening (0700 to 2300 hours)	65	70
Night (2300 to 0700 hours)	55	60

5.3 Assessment Methodology

- 5.3.1 Assessment of noise impact arising from fixed noise sources has been based on standard acoustic principles and procedures given in the IND-TM. Noise impacts due to individual noise sources are calculated and logarithmically summed at each NSR to represent the overall impacts:

$$\sum PNL_i = \sum [SWL_i + C_{distance} + C_{barrier} + C_{impulse} + C_{tonality} + C_{barrier} + C_{facade}]$$

where

- PNL_i = Predicted noise level, i.e. the overall sound pressure level arising from individual noise sources after various corrections
- SWL_i = Derived sound power level of individual noise sources from measured noise levels
- $C_{distance}$ = Correction for distance attenuation (for simplicity, only horizontal distance is considered in this study)
- $C_{barrier}$ = Correction (-10 dB(A)) for substantial shielding by building structure
- $C_{impulse}$ = According to the nature of the identified noise sources in the surrounding, noise of impulsive nature is not expected. No correction is recommended
- $C_{tonality}$ = Correction for tonality as in IND-TM, if applicable
- C_{facade} = Correction (+3 dB(A)) for façade reflection at receiver

5.4 Identification of Fixed Noise Sources

- 5.4.1 Based on onsite observation, the noise environment is dominated by road traffic. There are heavy traffic along Castle Peak Road – Lam Tei Section immediate to the Application Site.
- 5.4.2 On the other hand, by referring to the section of the fixed noise impact assessment in the Approved Environmental Assessment (EA) report for the Approved Rezoning Application (Application No.: Y/TM-LTY/11), several fixed noise sources (S1 to S8) were identified including car repairing workshops, logistic companies and ice manufacturing. With reference to the Approved EIA report for Development at San Hing Road and Hong Po Road, Tuen Mun (AEIAR-227/2020), the population intake at San Hing Road Site will be in year 2031. Therefore, the identified fixed noise sources (i.e. S4 to S8) within San Hing Road Site will not be existed and considered in this fixed noise impact assessment. The information of the identified fixed noise sources is extracted from the Approved EA report and shown in **Appendix 5.1**.
- 5.4.3 Based on onsite survey conducted on 31 October 2025, except S3, other identified fixed noise sources are still valid. The details of the onsite survey is provided in **Appendix 5.2**. For S3, as the site is being used for material storage, the loading and unloading activity using forklift is still valid for the use of fixed noise impact assessment. The locations of the identified fixed noise sources are shown in **Figure 5.1**. During the onsite survey, no other fixed noise sources was identified.
- 5.4.4 Furthermore, as referred to the approved noise impact assessment (NIA) report for the Approved S16 Planning Application (Application No.: A/TM-LTY/426), the operation of Wing Hing Meat Roasting Factory is carried out between 6:00 a.m. to 6:00 p.m. All works for the meat roasting are conducted within the factory. It was observed that the loading and unloading to/from the lorry and light good vehicle are conducted by hand, no powered mechanical equipment is involved. Besides, no other noise source was observed during site surveys.
- 5.4.5 As advised by Vegetable Marketing Organization, the operation of the Lam Tei Vegetable Collection Depot is carried out between 7:00 a.m. and 10:30 a.m. from Monday to Saturday only. Such operation involves in weighing vegetable in a tray with a scale, which then are moved onto the light good vehicle by hand. Only two staff, one light good vehicle and one scale are involved in the whole processing.
- 5.4.6 Besides, farmers' market for selling vegetable is held every Sunday between 7:00 a.m. and 4:00 p.m. The activities involve in setting tables and selling vegetable. There is no sound amplifier involved.
- 5.4.7 Lam Tei Vegetable Depot involved in weighing vegetable in a tray with a scale, which then were moved onto the lorry by hand. The whole process did not involve any powered mechanical equipment. Furthermore, the activities mainly were carried out within the structure with metal cover.
- 5.4.8 Based on the above information and the previous site observations, no adverse noise impact arising from Lam Tei Vegetable Collection Depot on the proposed development is anticipated.

5.5 Noise Sensitive Receivers

- 5.5.1 A number of representative Noise Sensitive Receivers (NSRs), corresponding to habitable rooms which are likely to be subject to worst noise impact were selected for the assessment. All assessment points were taken at 1 m away from the façade of openable windows of rooms of sensitive use (living room, bedroom).

Figure 5.2 illustrates the locations of the selected representative NSRs for fixed noise impact assessment.

5.6 Assessment Result without Noise Mitigation Measures (Base Scenario)

- 5.6.1 **Appendix 5.3** shows the noise strength of identified noise sources and predicted noise level at the selected NSRs. According to the assessment results, the predicted noise levels at all selected NSRs would comply with relevant standards without noise mitigation. No adverse fixed noise impact on the proposed development is anticipated.

5.7 Impact due to Future Fixed Noise Sources of the Proposed Development

- 5.7.1 The Proposed Development will inevitably contain noisy facilities such as ventilation system, fan system and HVAC (for clubhouse and proposed on-site sewage treatment plant). However, in this early planning stage, building services consultant/contractor has not been engaged and there is absence of any detail regarding potential noisy facilities. In all circumstances, the requirement under the HKPSG is fully observed (i.e. acceptable noise level minus 5 decibels). In future detailed design of the project, same requirement will be imposed so that the relevant noise standard will be met by various means such as selection of quiet equipment, use of shielding device, acoustic louvers, silencers, semi/full-enclosure. Upon availability of details of fixed noise sources, the assessment of fixed noise impact can be conducted with respect to the said planning approval condition. With abundance of direct noise mitigation measures to control and suppressed the generated noise level, no adverse noise impact due to operation of potentially noisy facilities of the Proposed Development is anticipated.

5.8 Conclusion

- 5.8.1 According to the result of fixed noise impact assessment, no adverse fixed noise impact due to surrounding fixed noise sources on the proposed development is anticipated. No noise mitigation is considered necessary.
- 5.8.2 This is in early planning stage of the study so that there is no detail of future fixed noise sources onsite available. With abundance of direct noise mitigation measures to control and suppressed the generated fixed noise level, no adverse noise impact due to operation of potentially noisy facilities of the proposed development is anticipated.

6. CONCLUSION

- 6.1.1 The Noise Impact Assessment (NIA) was undertaken to evaluate the potential noise impacts arising from the nearby railway, fixed plants and road traffic upon the proposed development.
- 6.1.2 The road traffic noise impact from Castle Peak Road – Lam Tei Section can be reduced by adopting 0.2m - 1.5m acoustic fins with sound absorption material, acoustic window (baffle type), enhanced acoustic balcony (baffle type), 1.5m high solid wall, self-closing door, fixed glazing with maintenance window and sound absorption material. The compliance rate of road traffic noise for mitigated case scenario would be 100% with the implementation of the proposed road traffic noise mitigation measures.
- 6.1.3 The railway noise impact from TML and LRT can be reduced by adopting AW(BT), EAB(BT) and fixed glazing with maintenance window. After mitigation, the railway noise impact assessment result reveals that all noise sensitive receivers would comply with the railway noise standard. Therefore, the proposed development would not subject to any adverse railway noise impact with the implementation of the proposed railway noise mitigation measures.
- 6.1.4 The overall noise mitigation measures are shown in **Figure 6.1** and the proposed overall noise mitigation measures schedule is summarized in **Appendix 6.1**.
- 6.1.5 According to the result of fixed noise impact assessment, no adverse fixed noise impact due to surrounding fixed noise sources on the proposed development is anticipated. No noise mitigation is considered necessary.

Figures

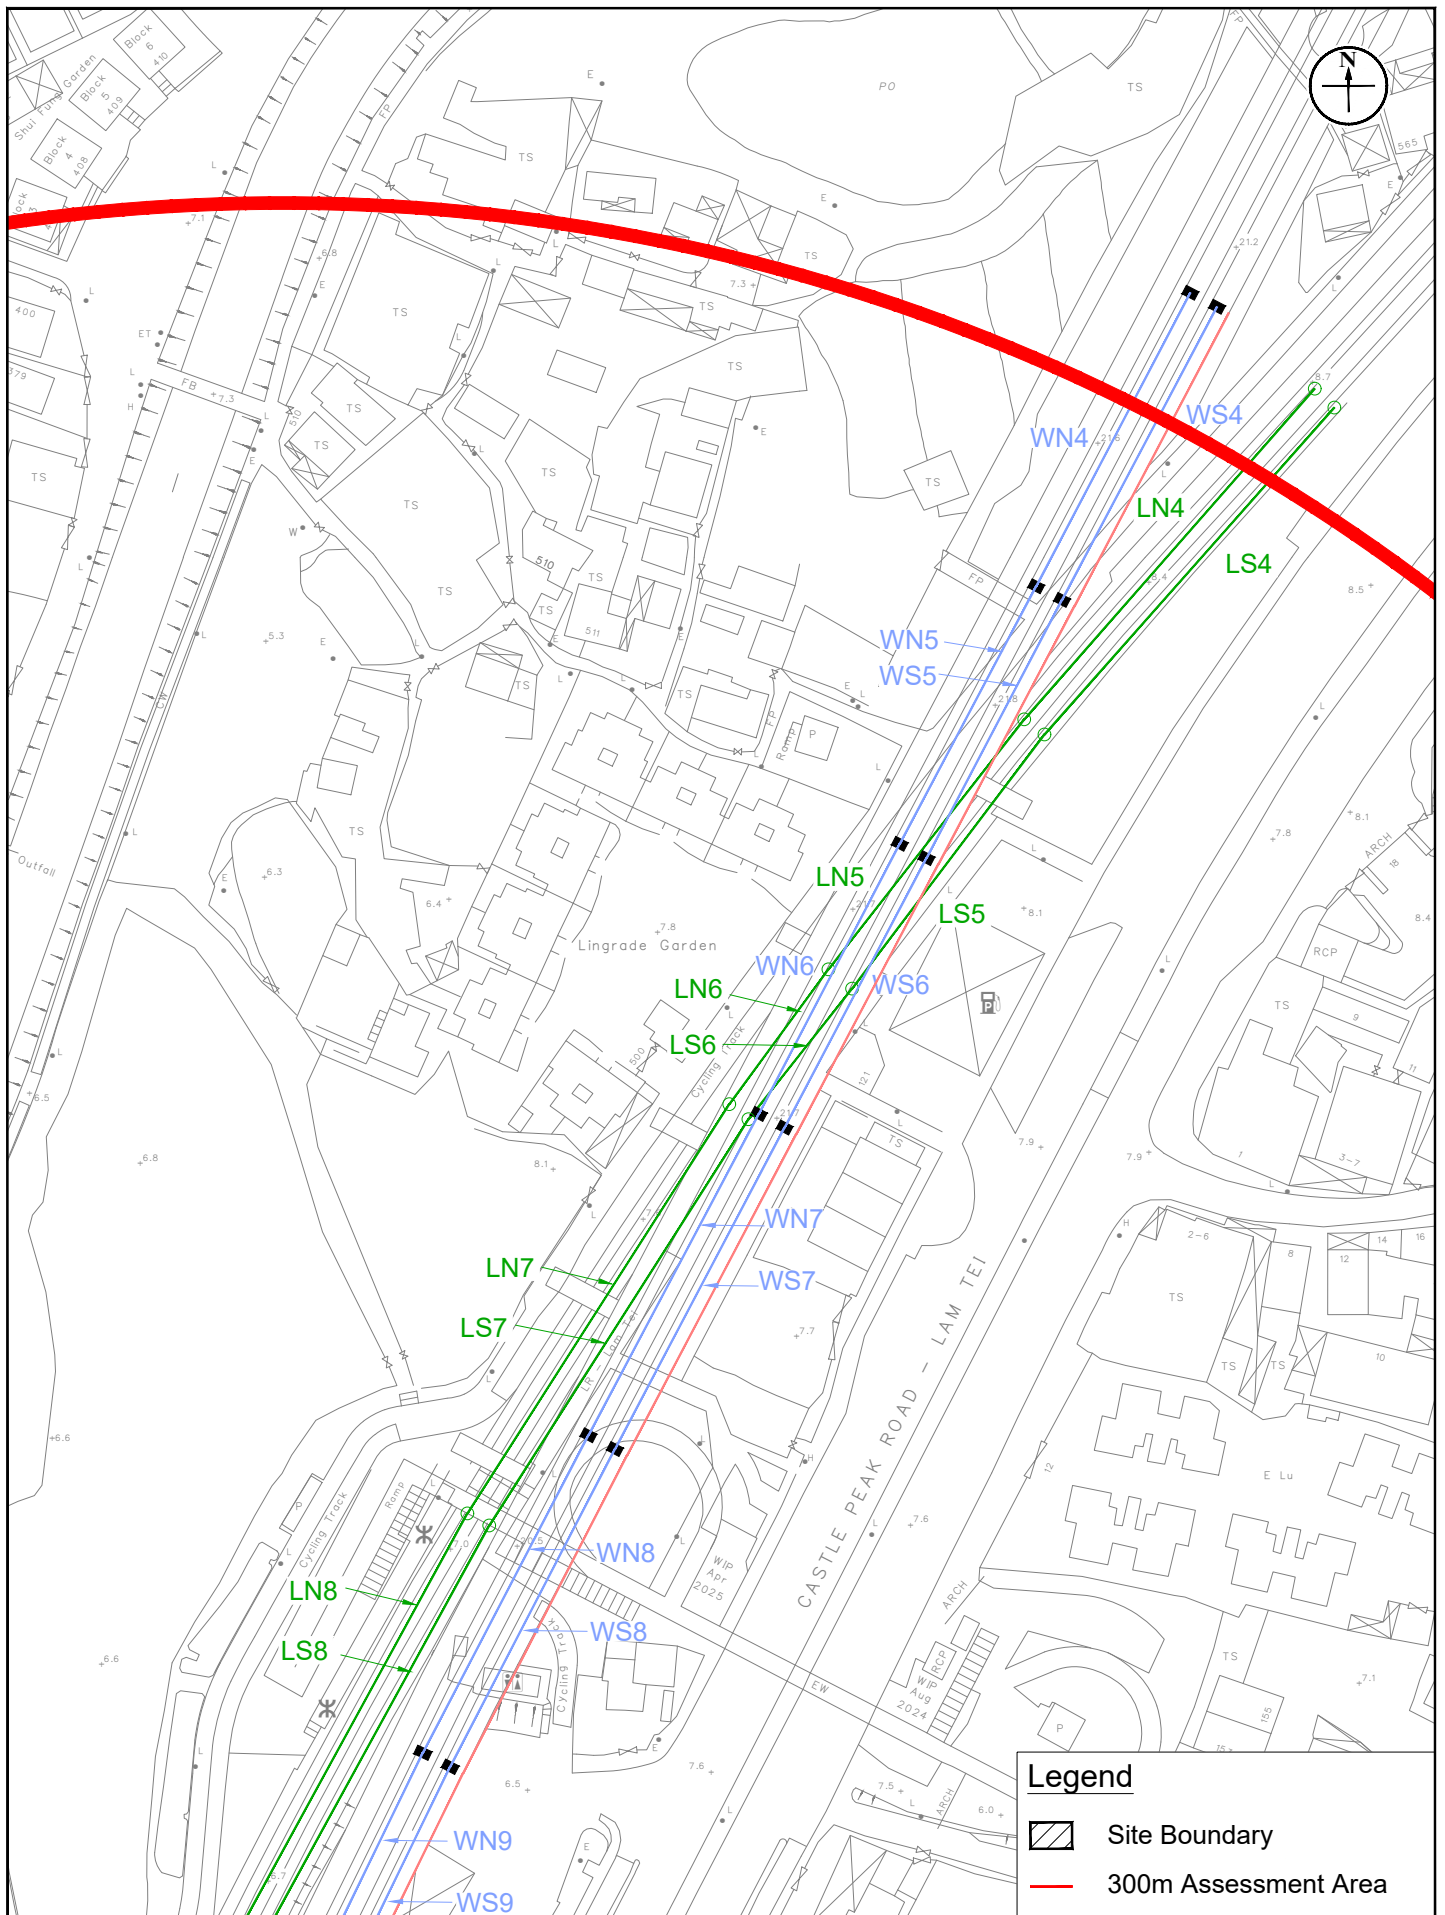


Figure: 4.2d

Title: Locations of the Identified Rail Track within 300m Assessment Area (Zoom In 3)

Project: S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for the Proposed Residential Development (Flat) with Shop and Services Use at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei Tuen Mun


RAMBOLL

Drawn by: MW

Checked by: CC

Rev.: 1.0

Date: Oct 2025

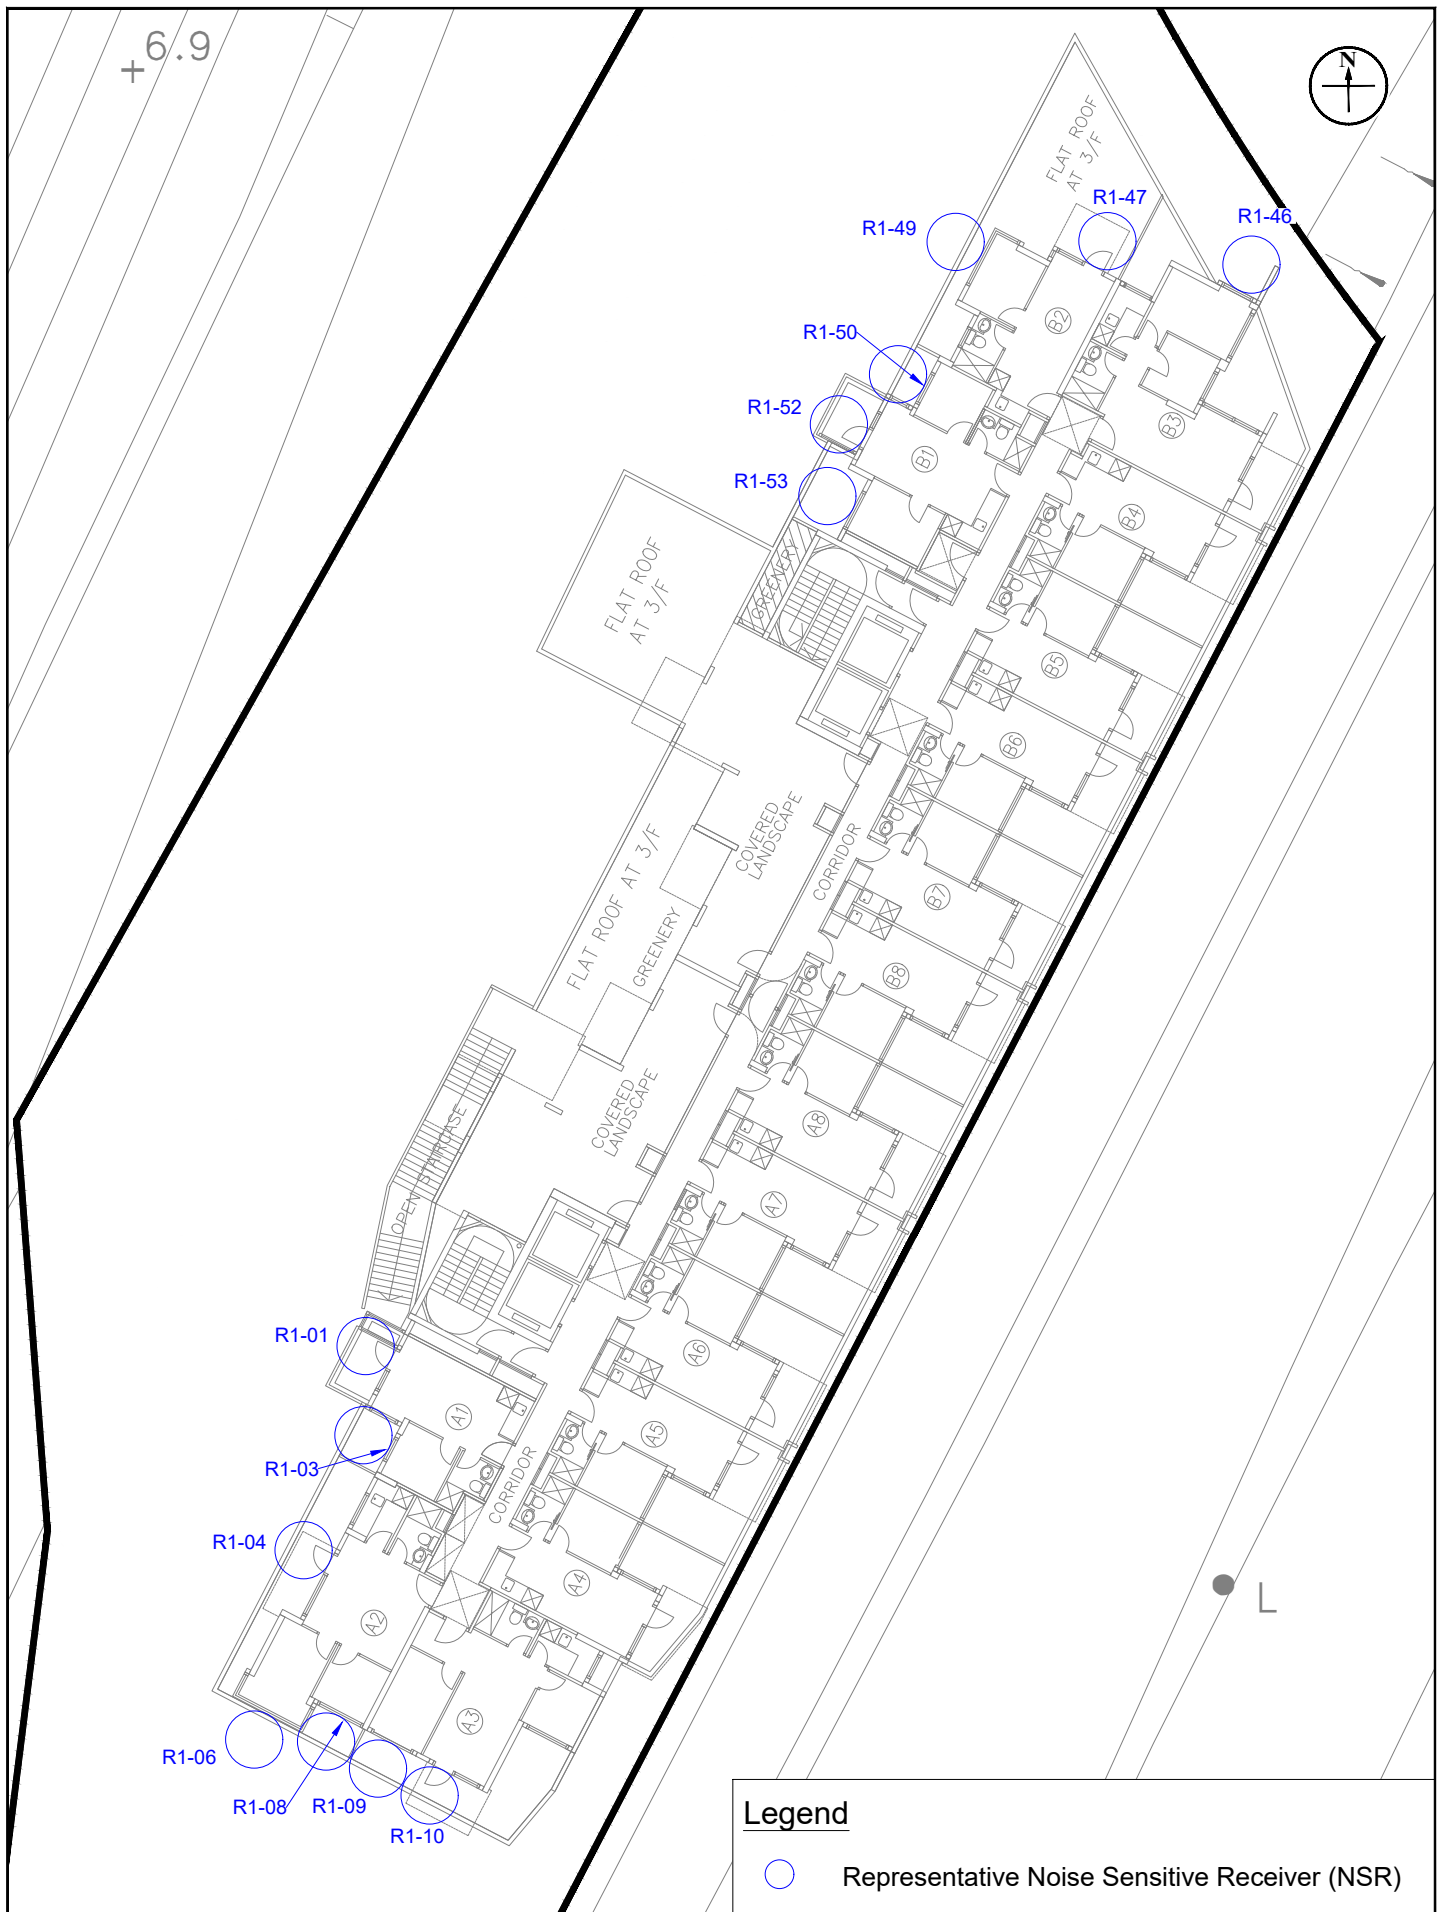

Legend	
	Representative Noise Sensitive Receiver (NSR)

Figure: 4.3a			
Title: Proposed Railway Noise Mitigation Measures (3/F)		Drawn by: MW	
		Checked by: CC	
		Rev.: 1.0	
Project: S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for the Proposed Residential Development (Flat) with Shop and Services Use at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei Tuen Mun		Date: Oct 2025	

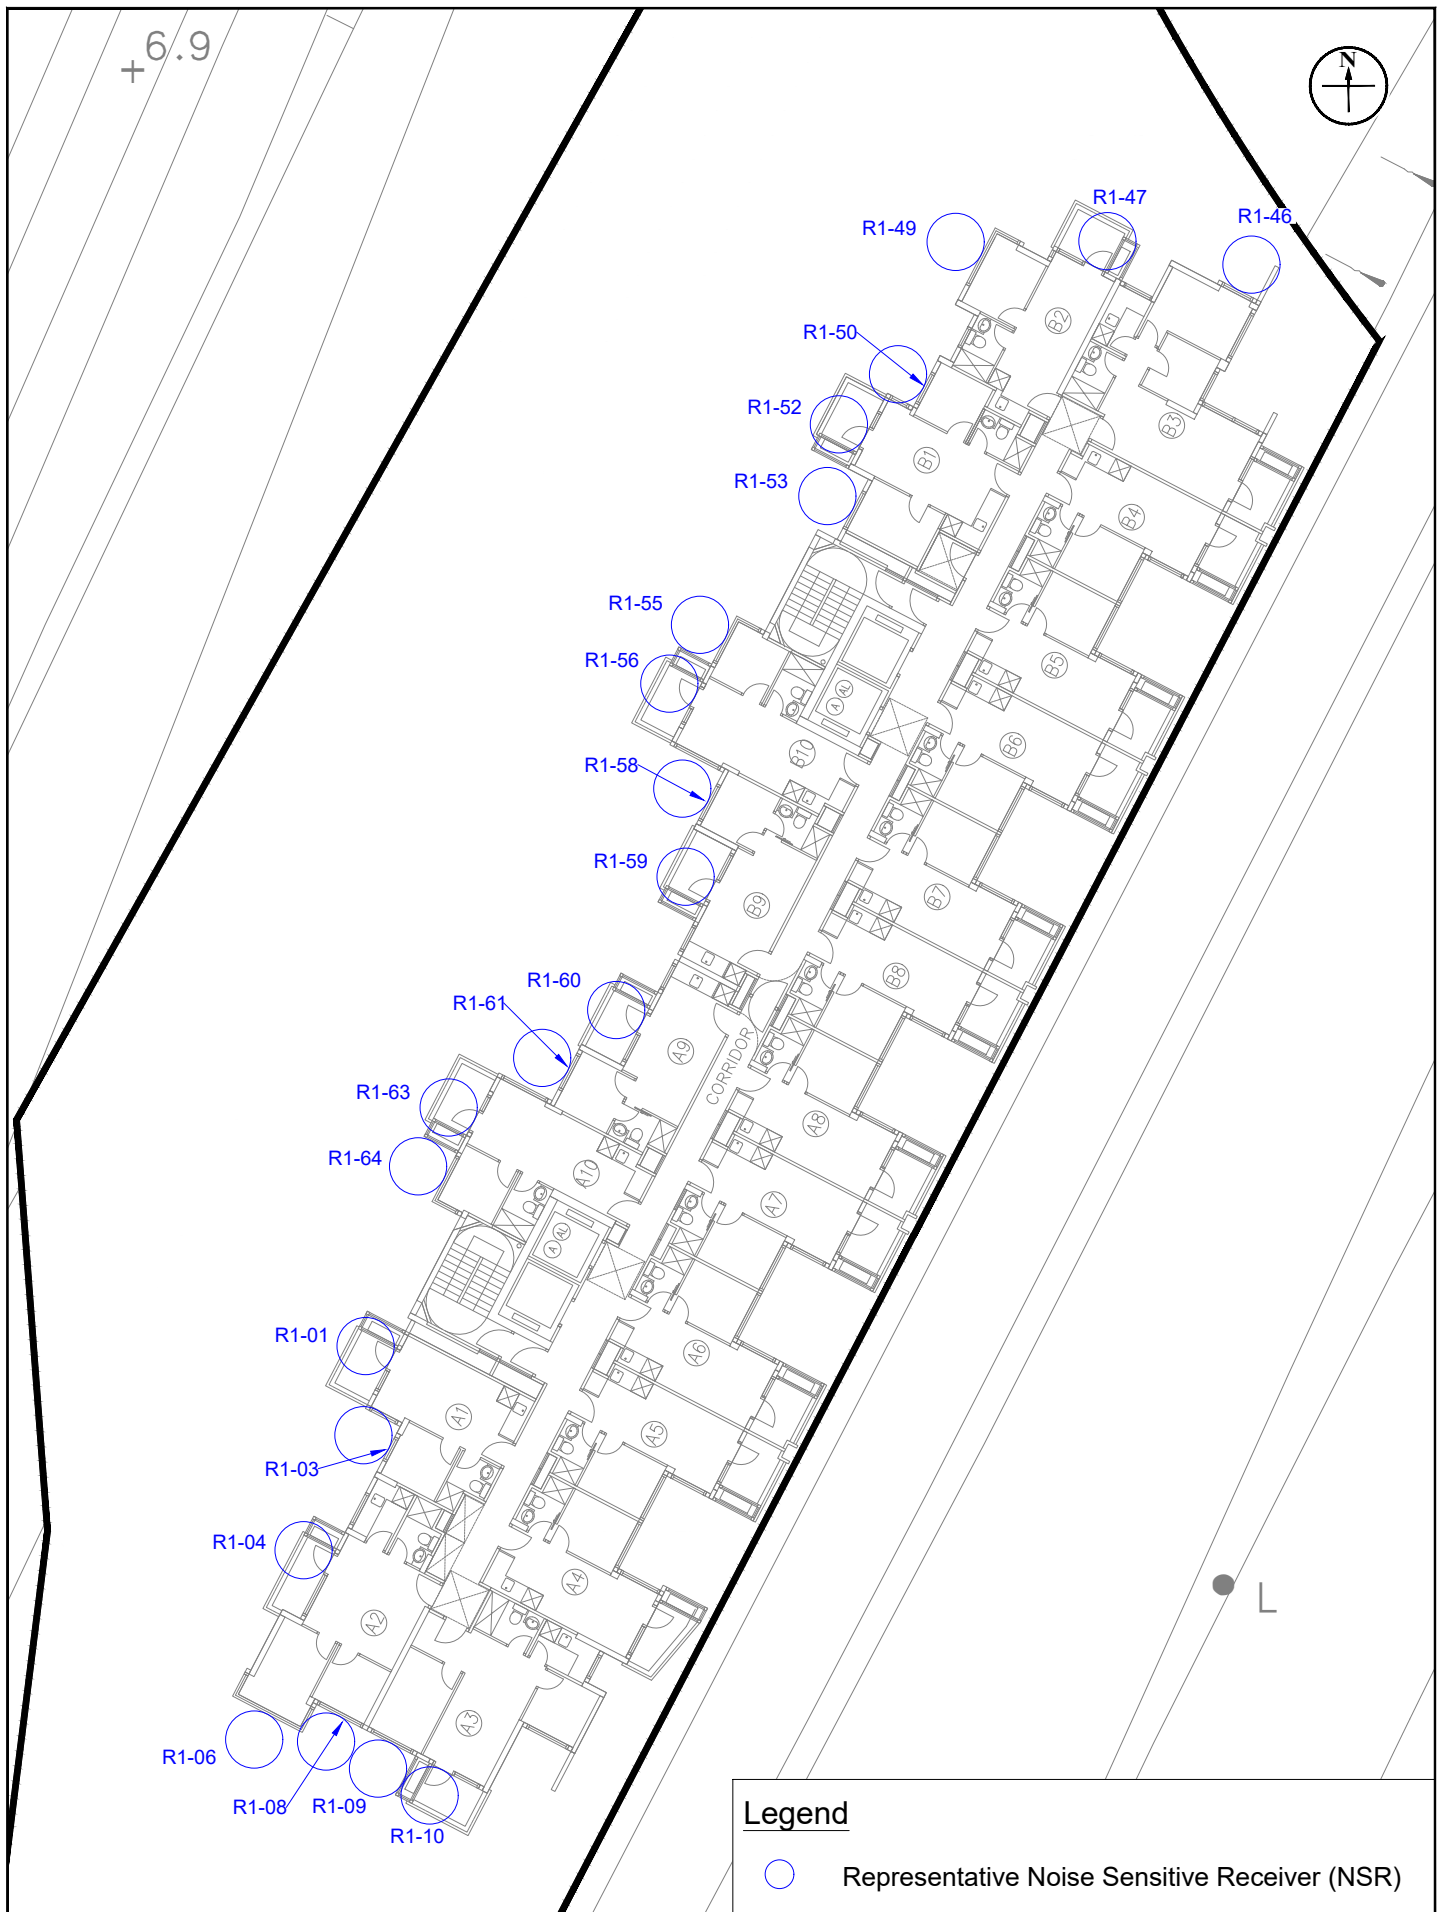


Figure: 4.3b		RAMBOLL	
Title: Proposed Railway Noise Mitigation Measures (4/F - 19/F)		Drawn by: MW	
		Checked by: CC	
Project: S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for the Proposed Residential Development (Flat) with Shop and Services Use at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei Tuen Mun		Rev.: 1.0	
		Date: Oct 2025	

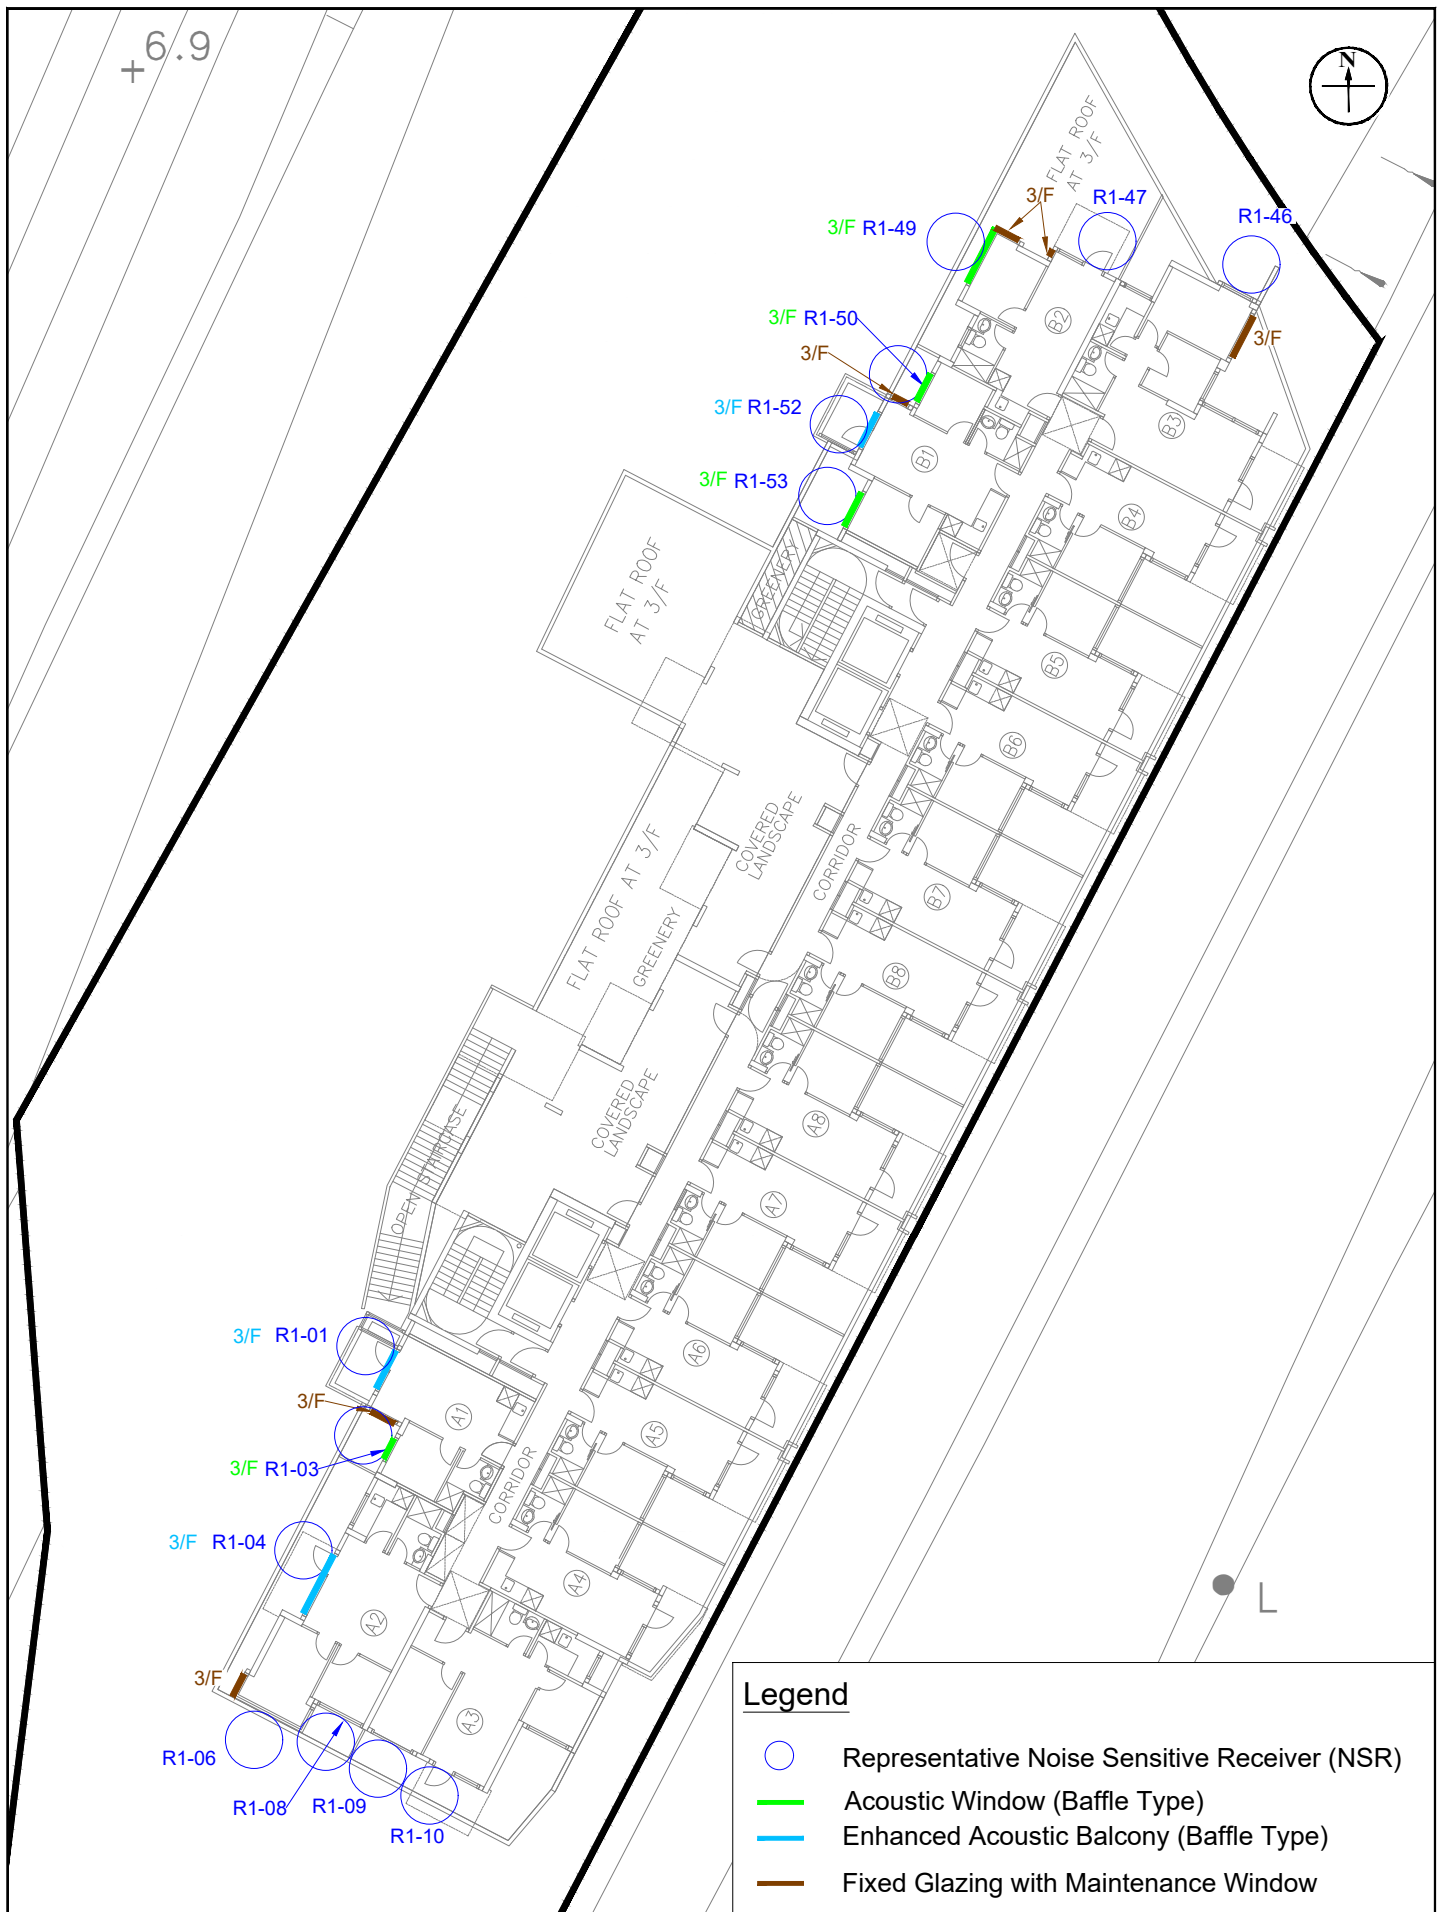


Figure: 4.4a

Title: Proposed Railway Noise Mitigation Measures (3/F)

Project: Proposed Residential Development at Lot Nos. 531 RP, 532 S.D RP and 532 RP in D.D. 130 and Adjoining Government Land, Lam Tei, Tuen Mun

RAMBOLL

Drawn by: MW

Checked by: BF

Rev.: 1.0

Date: Oct 2025

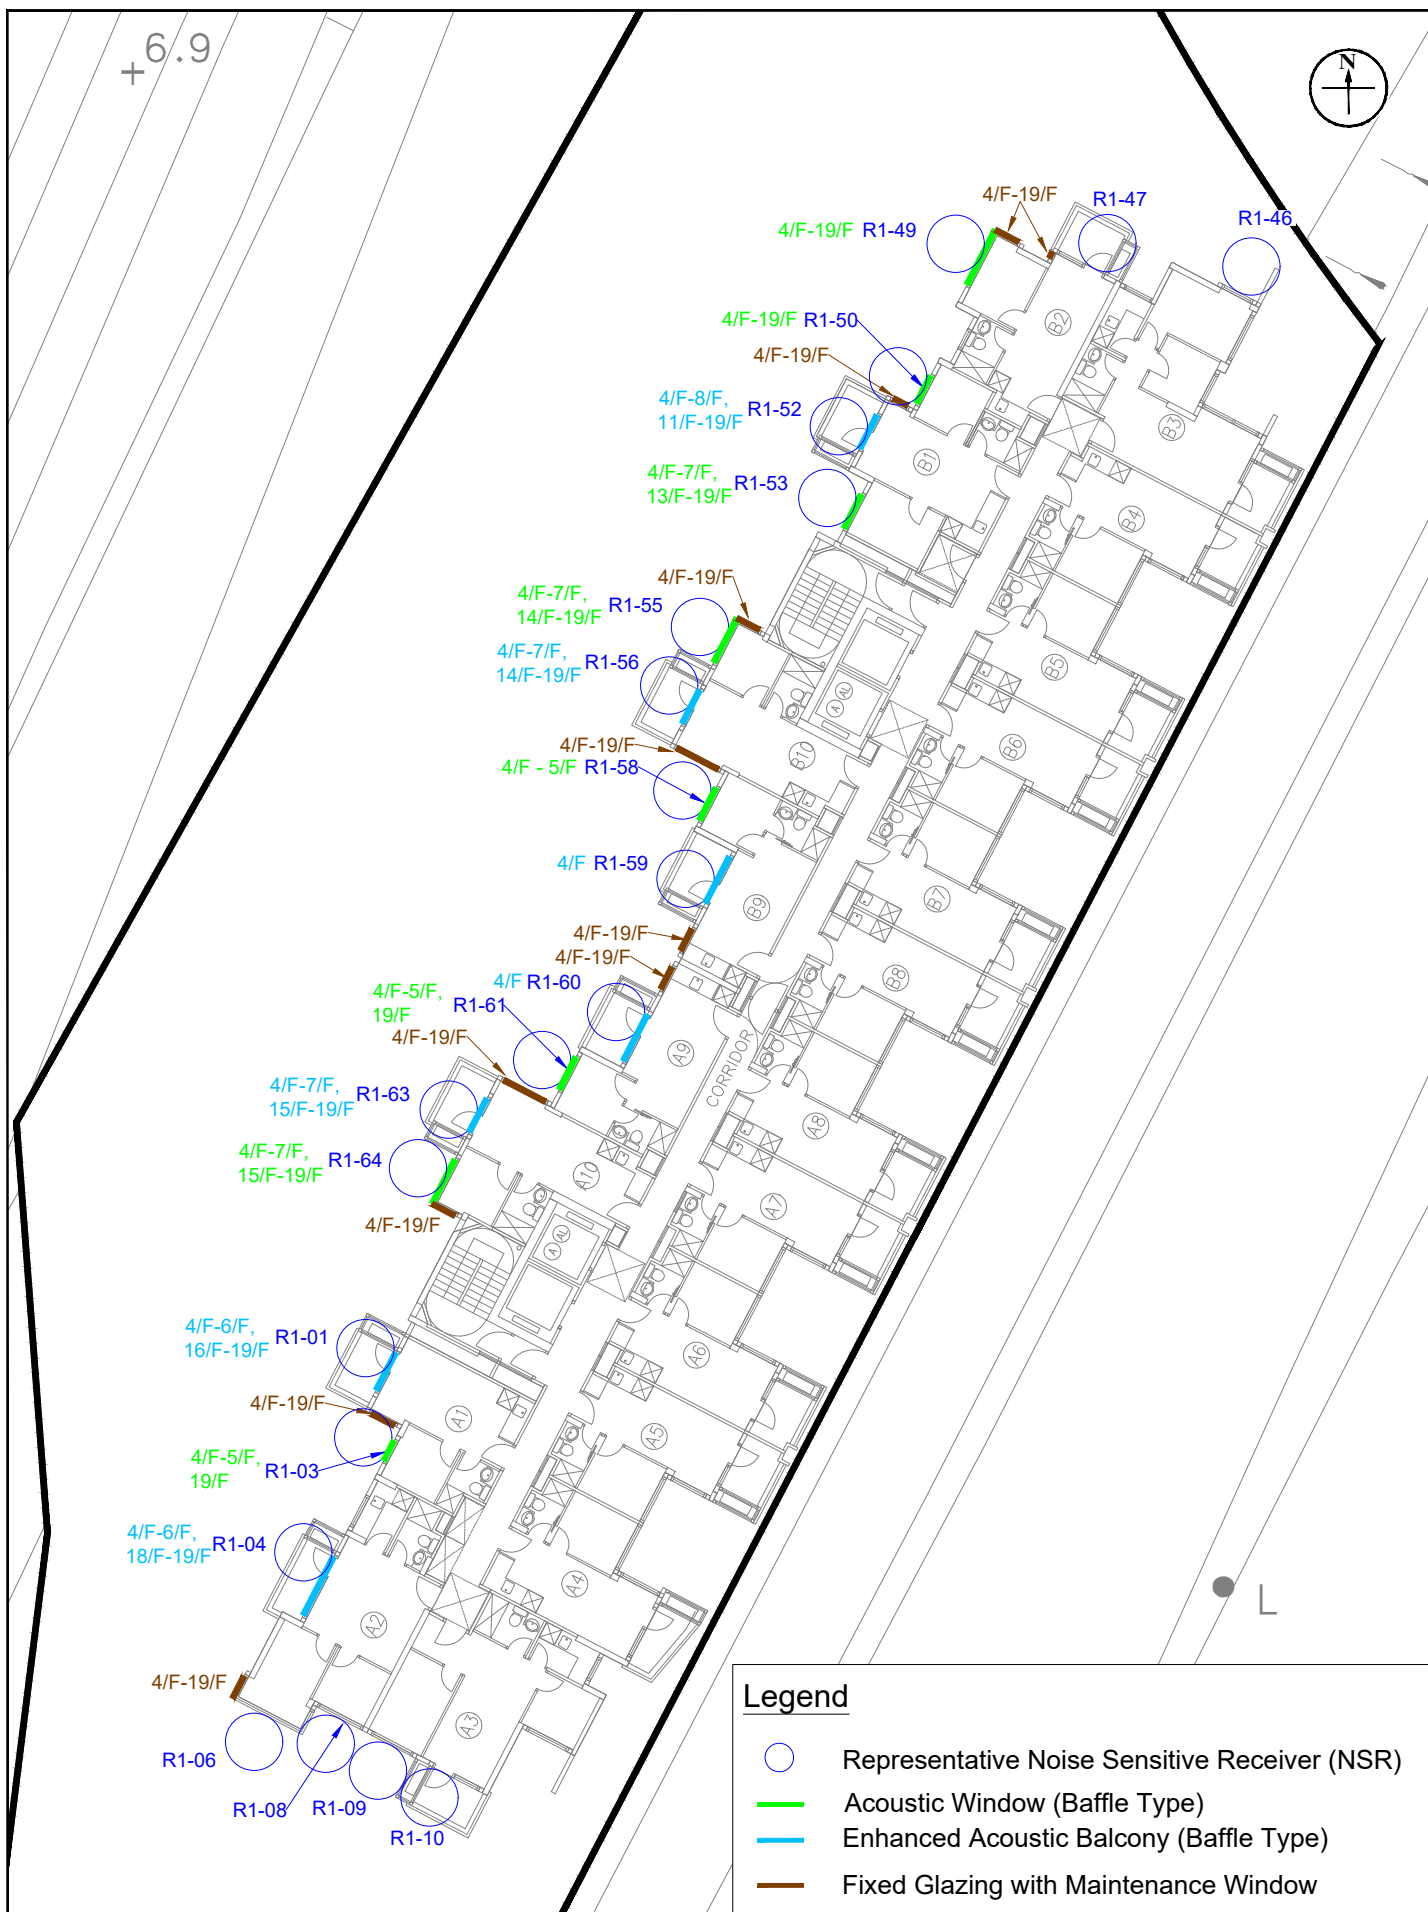


Figure: 4.4b

Title: Proposed Railway Noise Mitigation Measures (4/F - 19/F)

Project: Proposed Residential Development at Lot Nos. 531 RP, 532 S.D RP and 532 RP in D.D. 130 and Adjoining Government Land, Lam Tei, Tuen Mun

RAMBOLL

Drawn by: MW

Checked by: BF

Rev.: 1.0

Date: Oct 2025

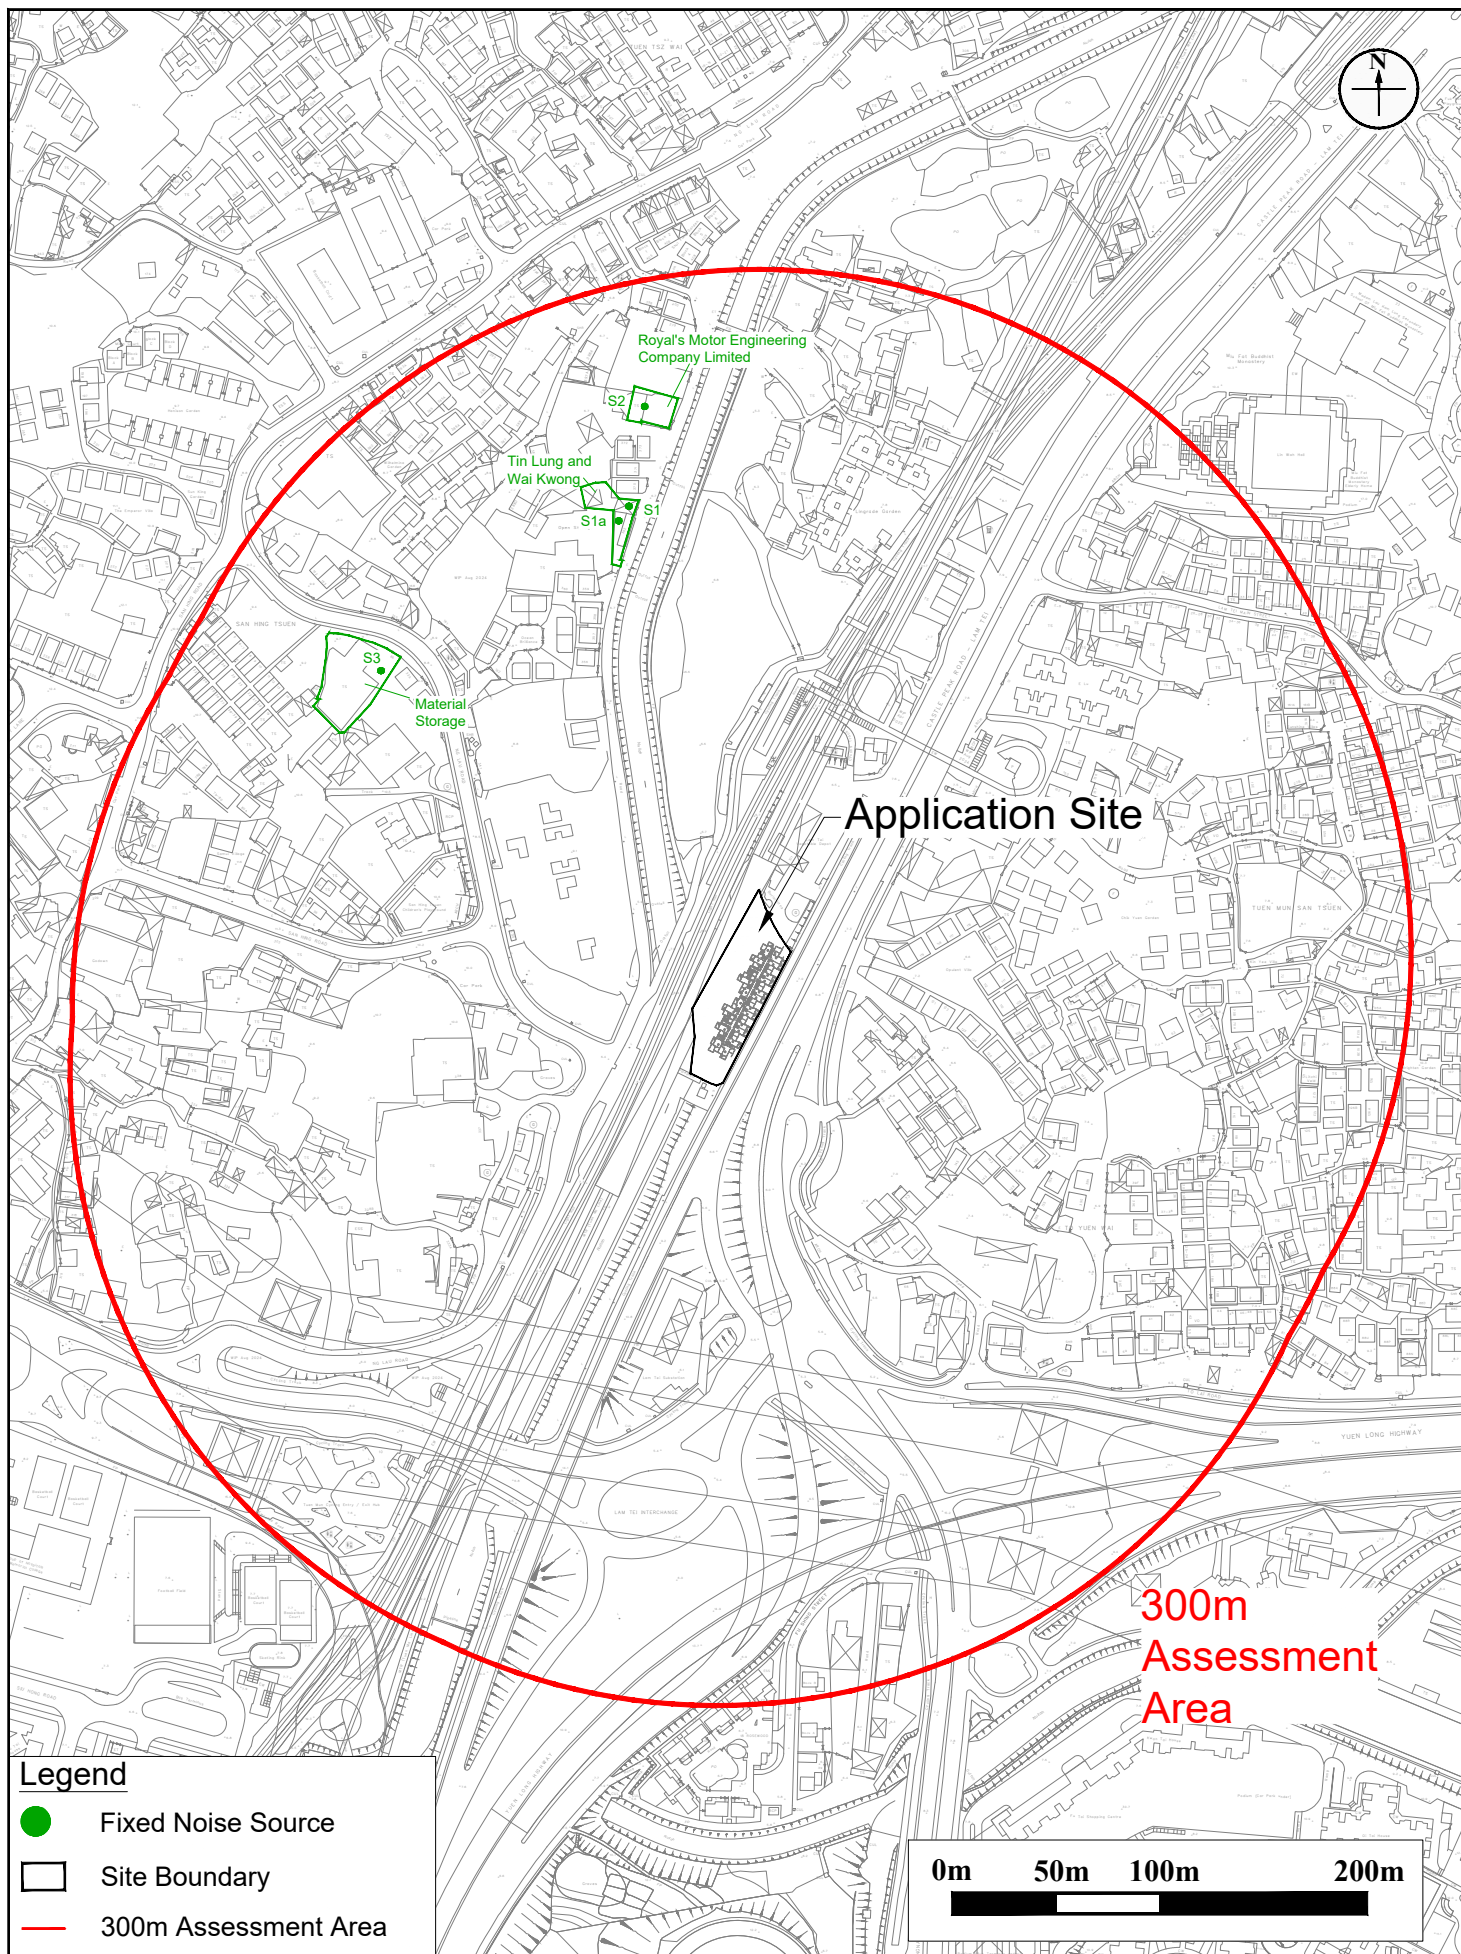


Figure: 5.1a

Title: Locations of Identified Fixed Noise Sources for Fixed Noise Impact Assessment

RAMBOLL


Drawn by: CM


Checked by: CC

Project: S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for the Proposed Residential Development (Flat) with Shop and Services Use at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei Tuen Mun

Rev.: 1.0

Date: Oct 2025

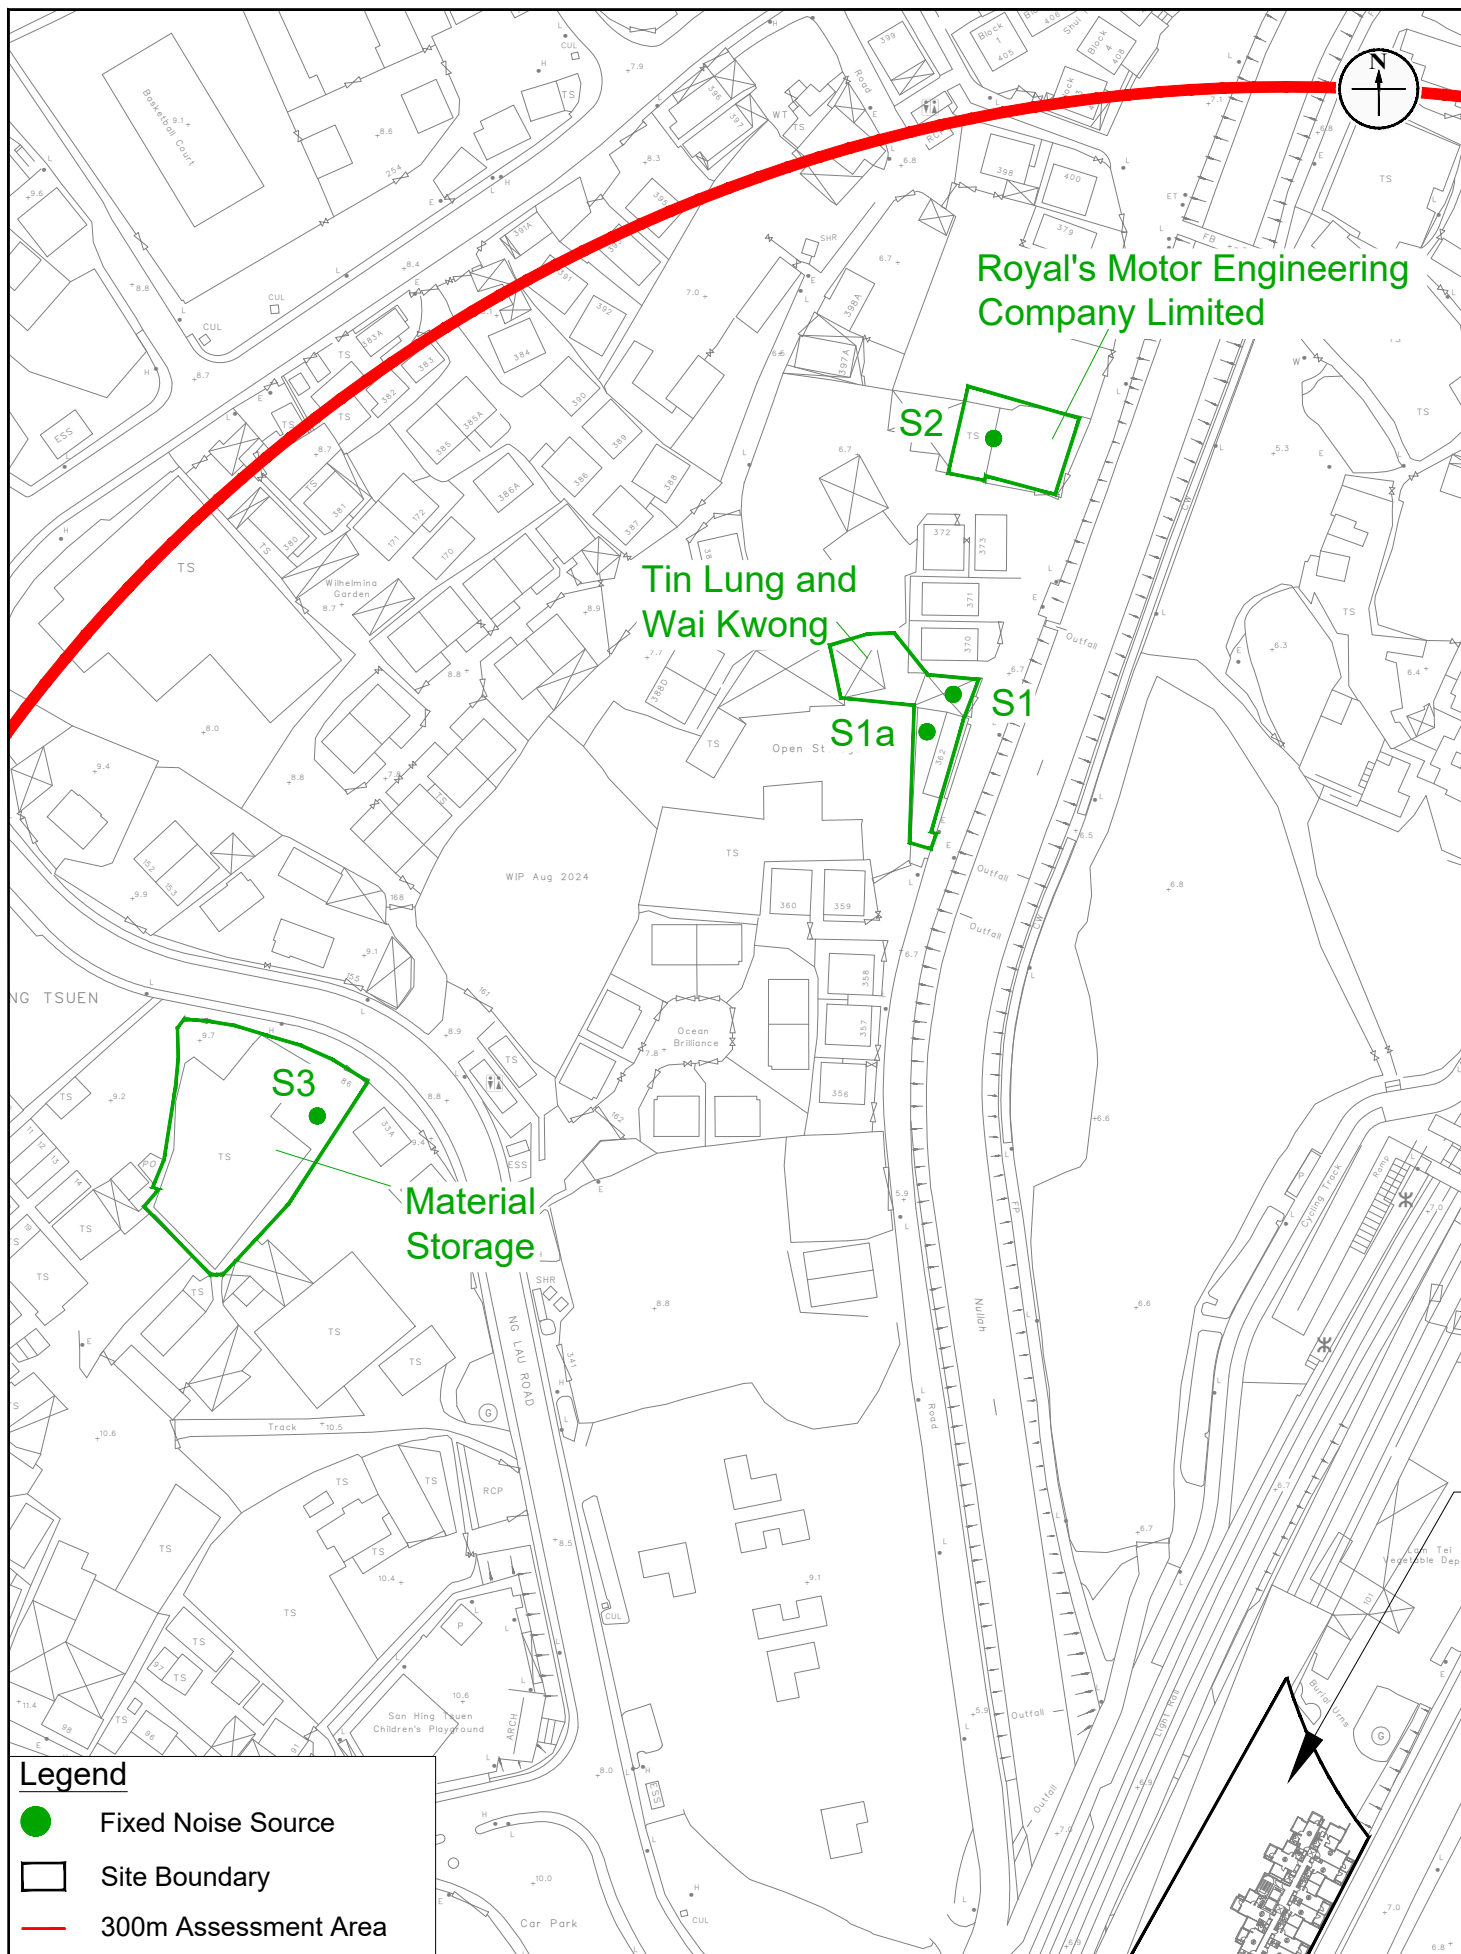

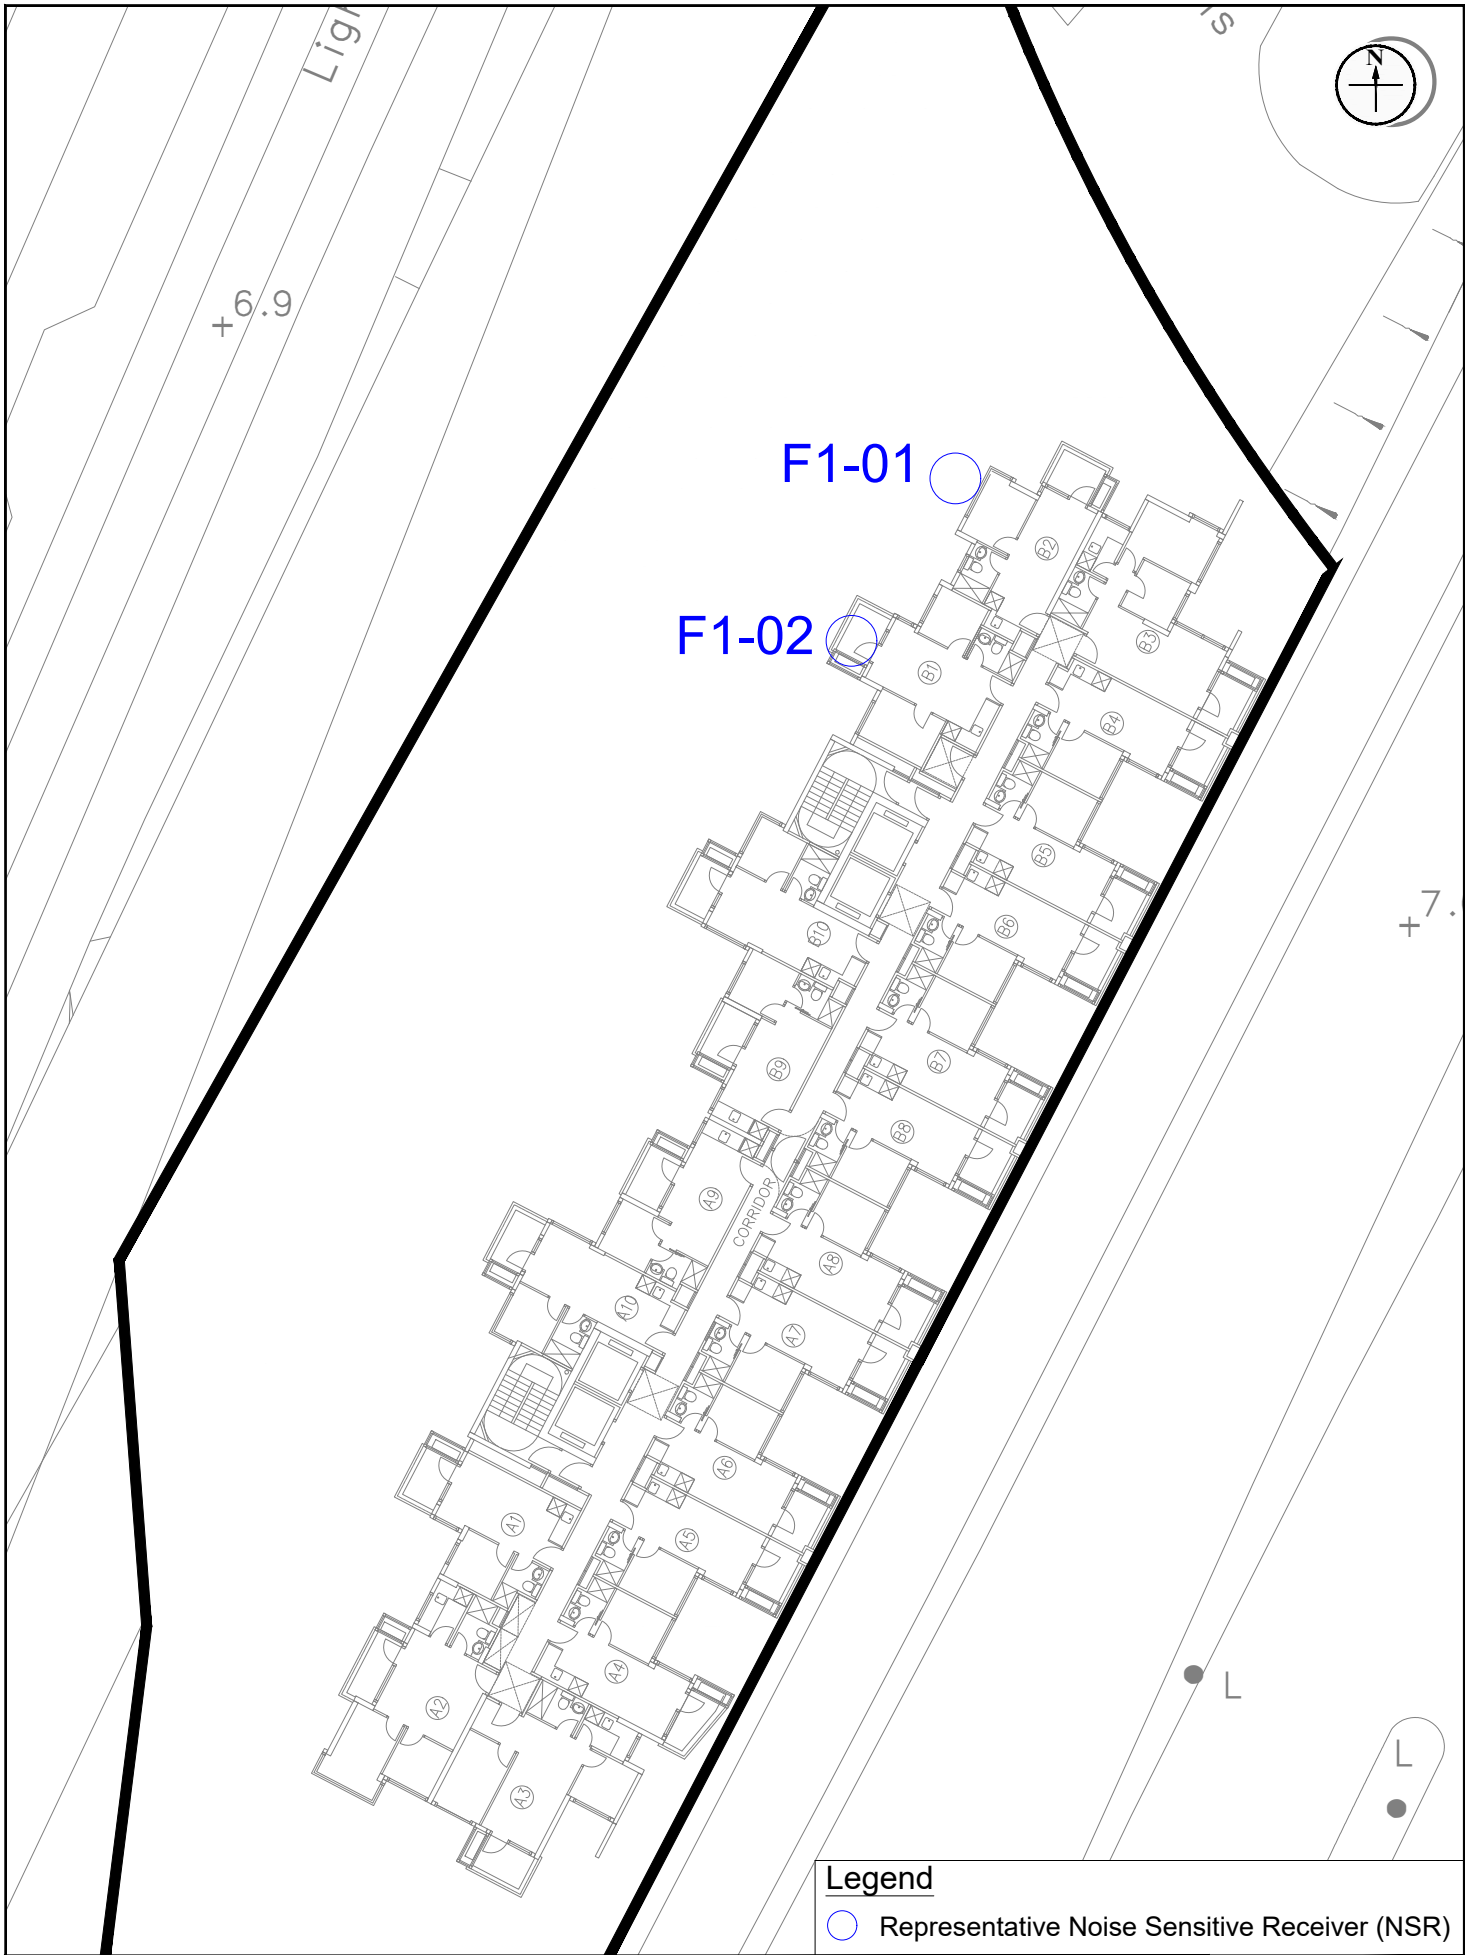


Legend	
	Representative Noise Sensitive Receiver (NSR)

Figure: 5.2			
Title:	Locations of Representative Noise Sensitive Receivers for Fixed Noise Impact Assessment	Drawn by: CM	
		Checked by: CC	
Project:	S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for the Proposed Residential Development (Flat) with Shop and Services Use at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei Tuen Mun	Rev.: 1.0	
		Date: Oct 2025	

Legend

- Acoustic Window (Baffle Type)
- Enhanced Acoustic Balcony (Baffle Type)
- Fixed Glazing with Maintenance Window
- Acoustic Fin
- 1.5m high Solid Wall at 3/F Flat Roof
- - - Sound Absorption Material applied except Window Opening Area (3/F)

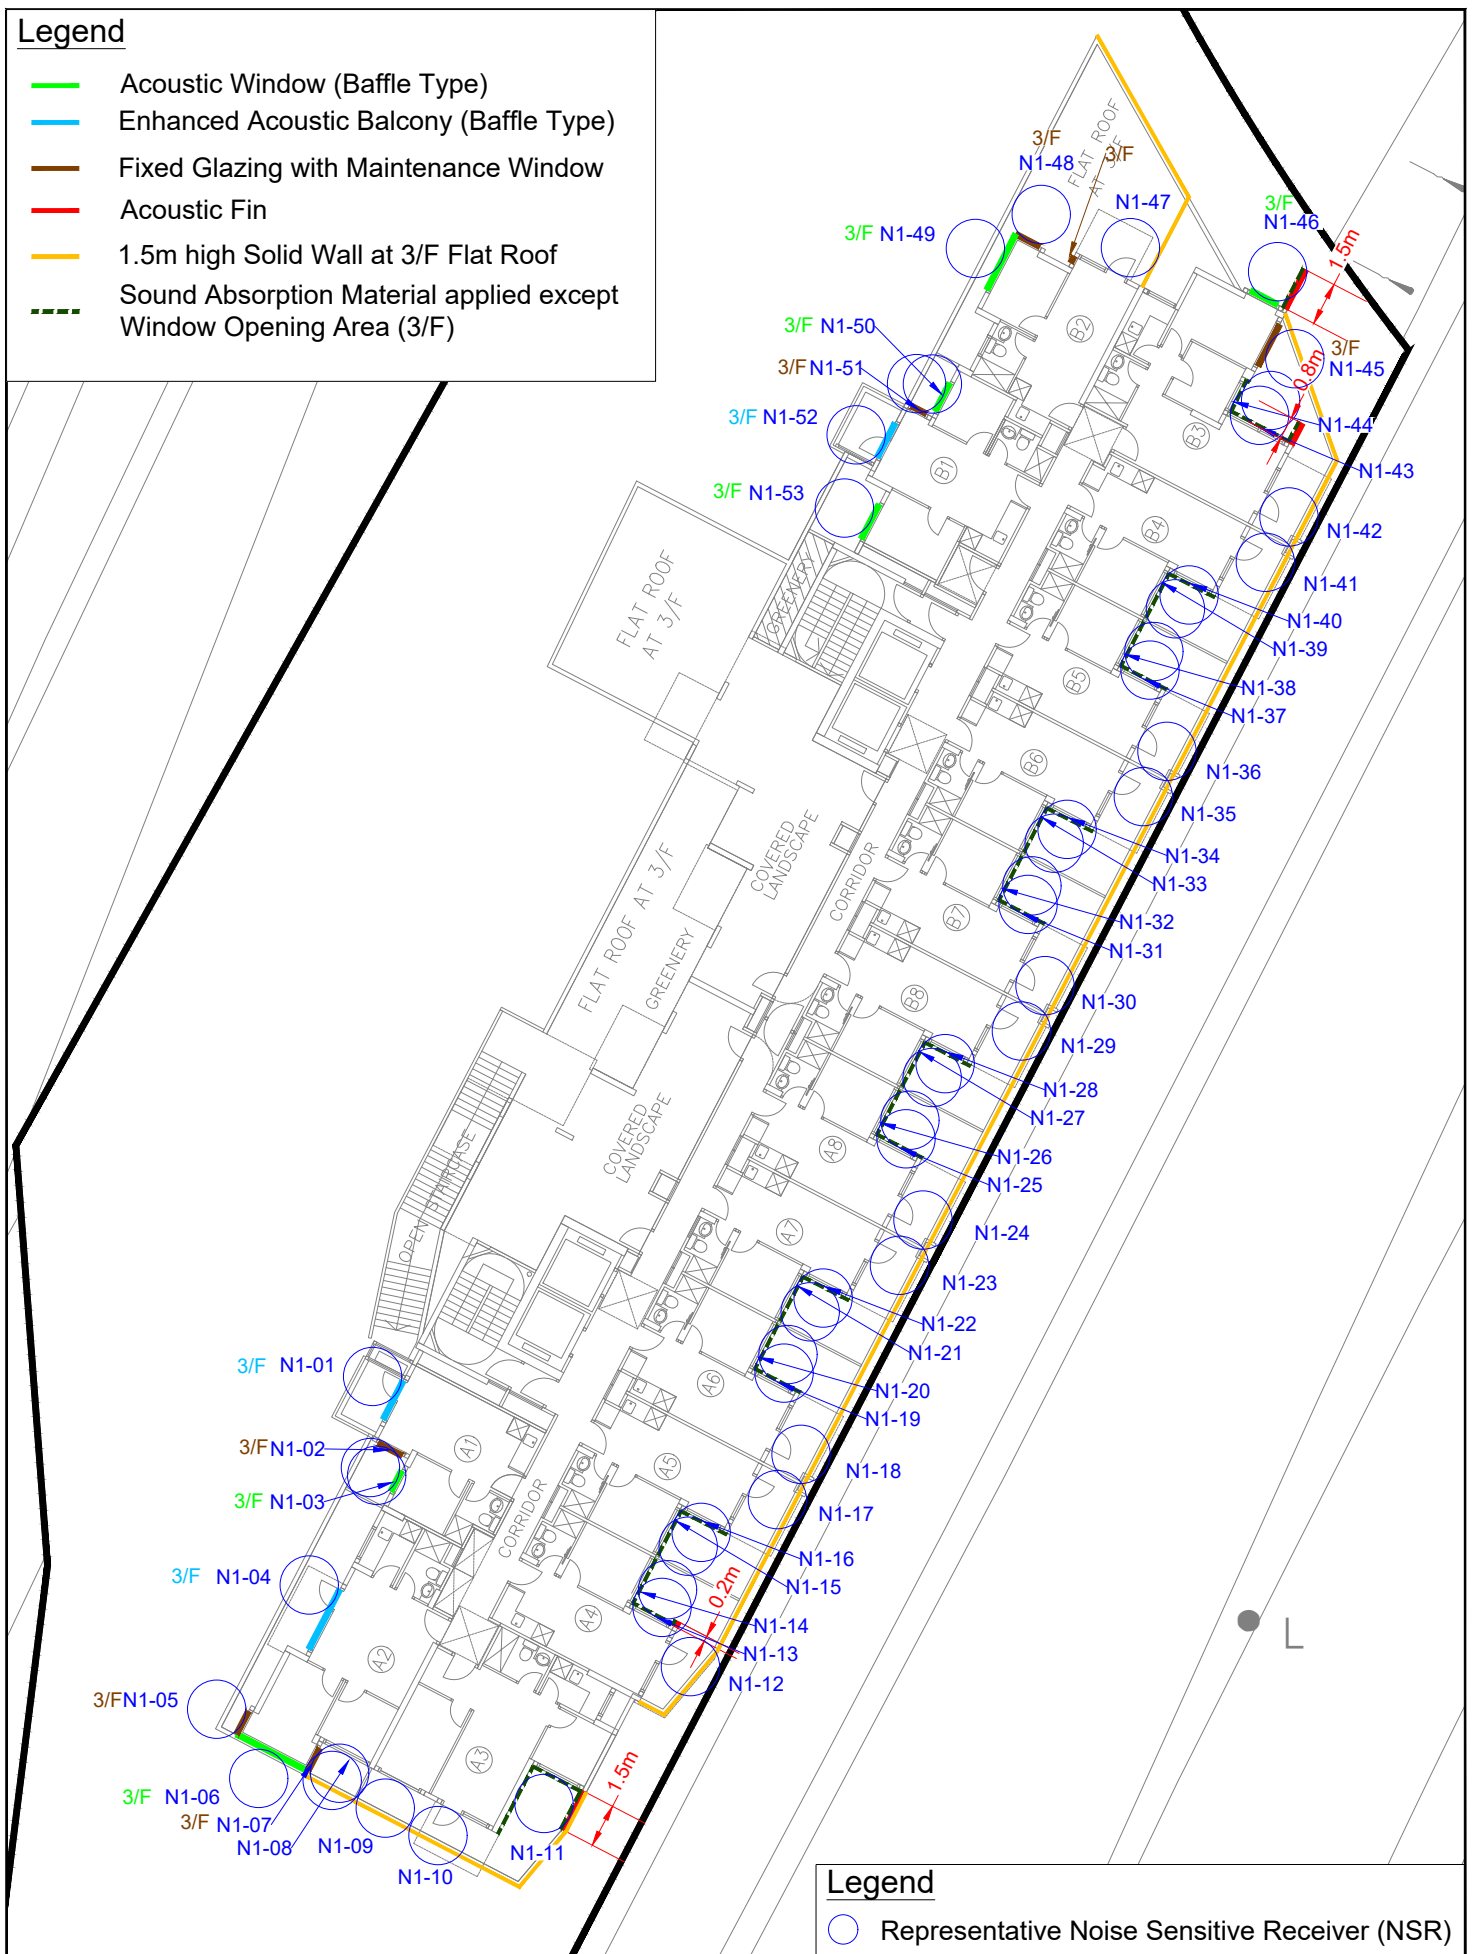

Legend

- Representative Noise Sensitive Receiver (NSR)

Figure: 6.1a

Title: Proposed Overall Noise Mitigation Measures (3/F)

Project: S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for the Proposed Residential Development (Flat) with Shop and Services Use at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei Tuen Mun

RAMBOLL

Drawn by: CM

Checked by: BF

Rev.: 1.0

Date: Oct 2025

Legend

- Acoustic Window (Baffle Type)
- Enhanced Acoustic Balcony (Baffle Type)
- Fixed Glazing with Maintenance Window
- Self-Closing Door
- Acoustic Fin
- Sound Absorption Material applied except Window Opening Area (4/F-19/F)

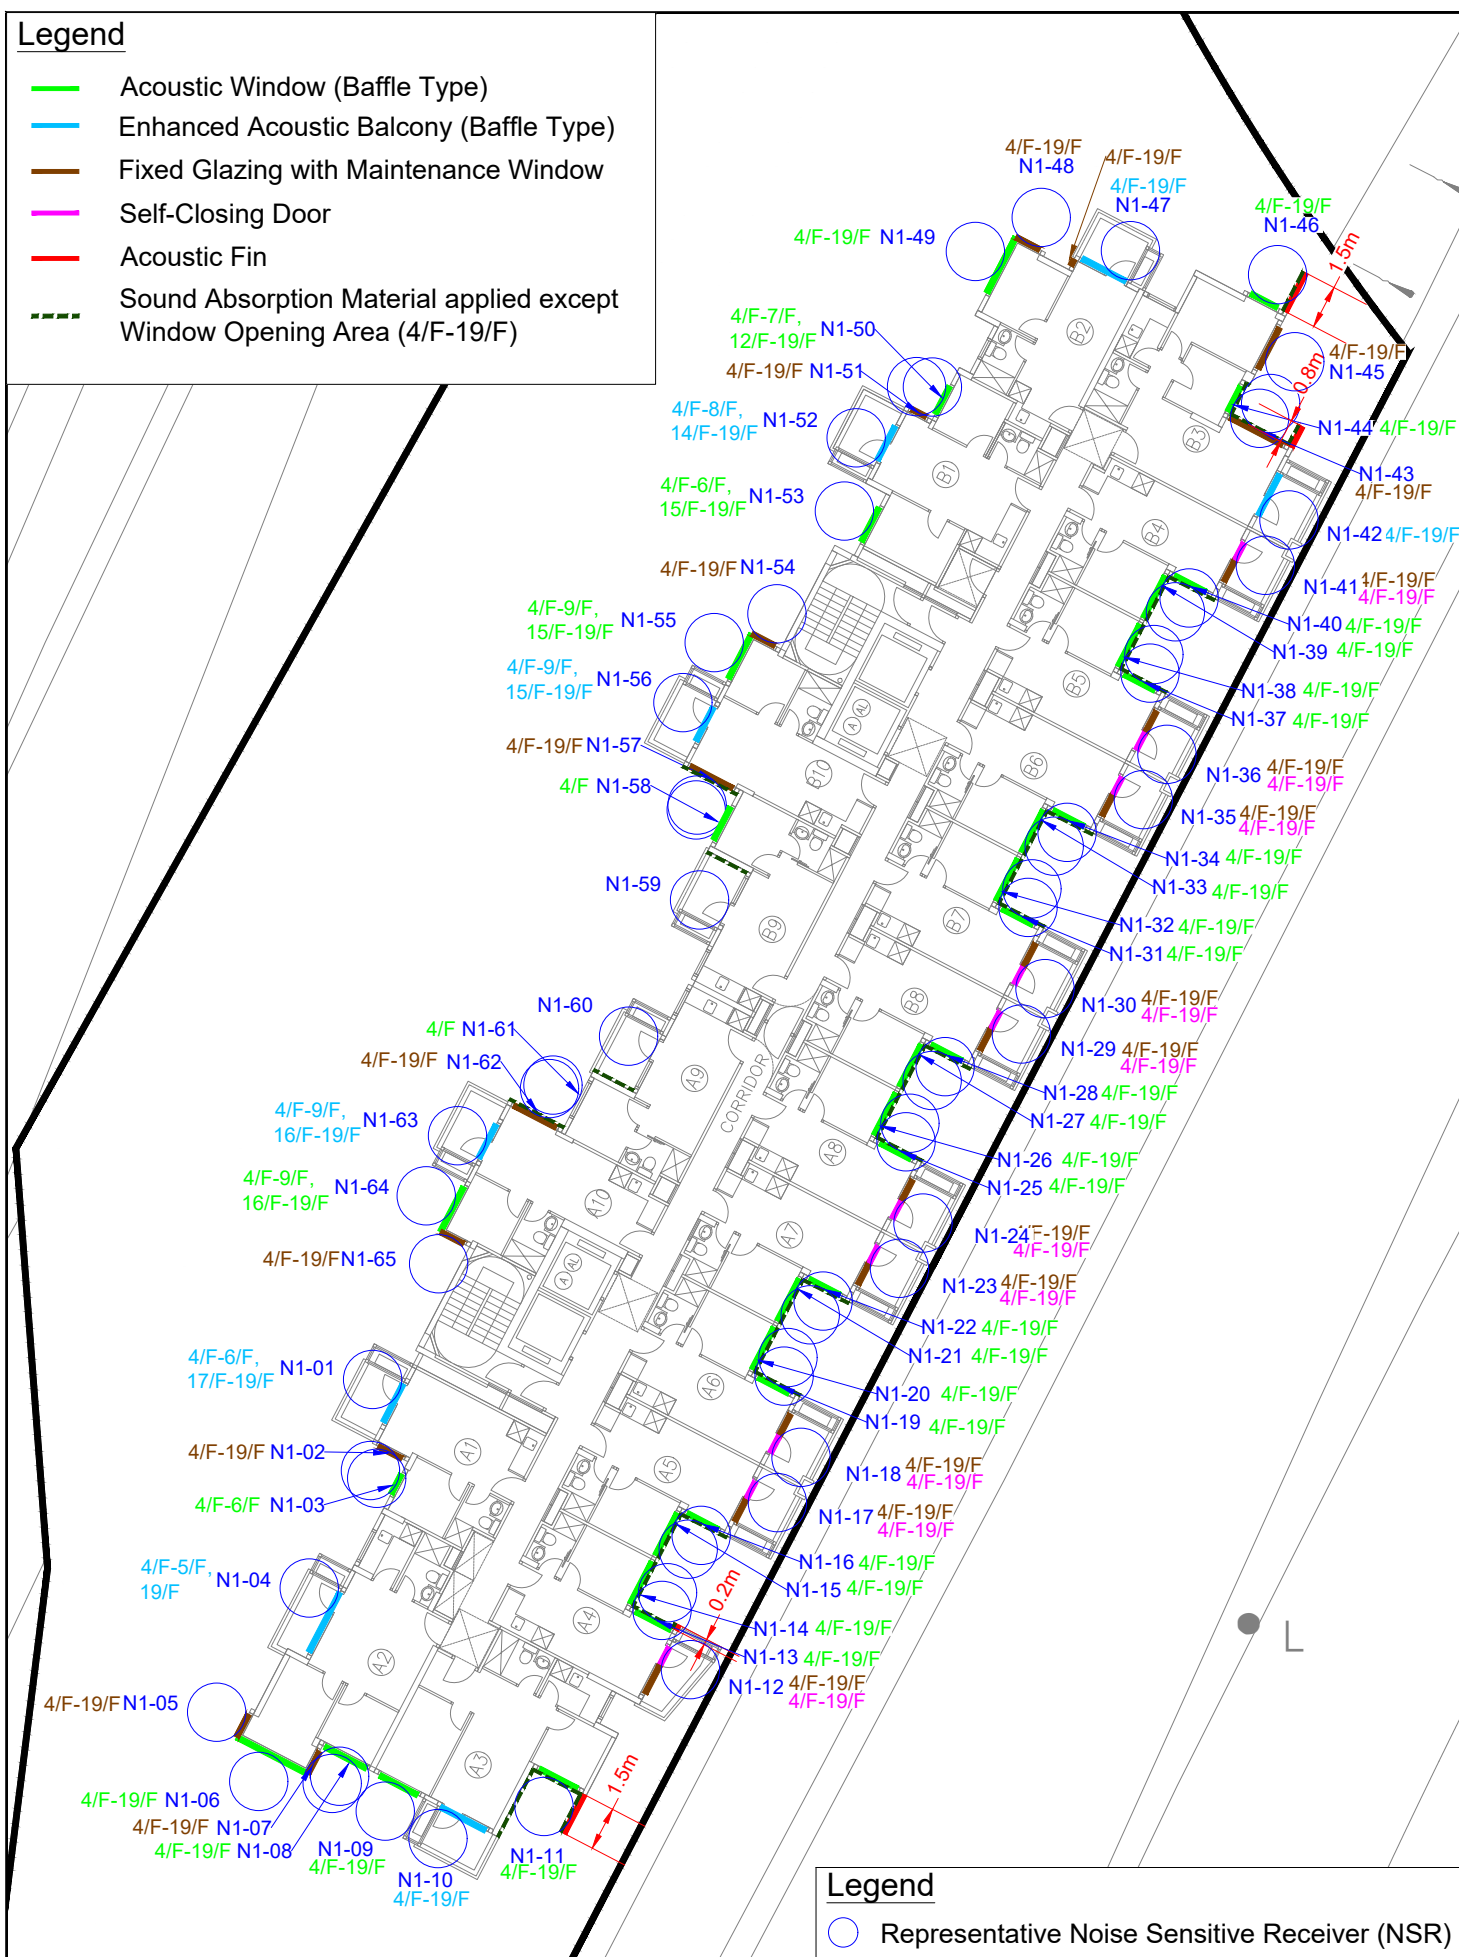


Figure: 6.1b

Title: Proposed Road Traffic Noise Mitigation Measures (4/F - 19/F)

Project: S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for the Proposed Residential Development (Flat) with Shop and Services Use at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei Tuen Mun

RAMBOLL

Drawn by: CM

Checked by: BF

Rev.: 1.0

Date: Oct 2025

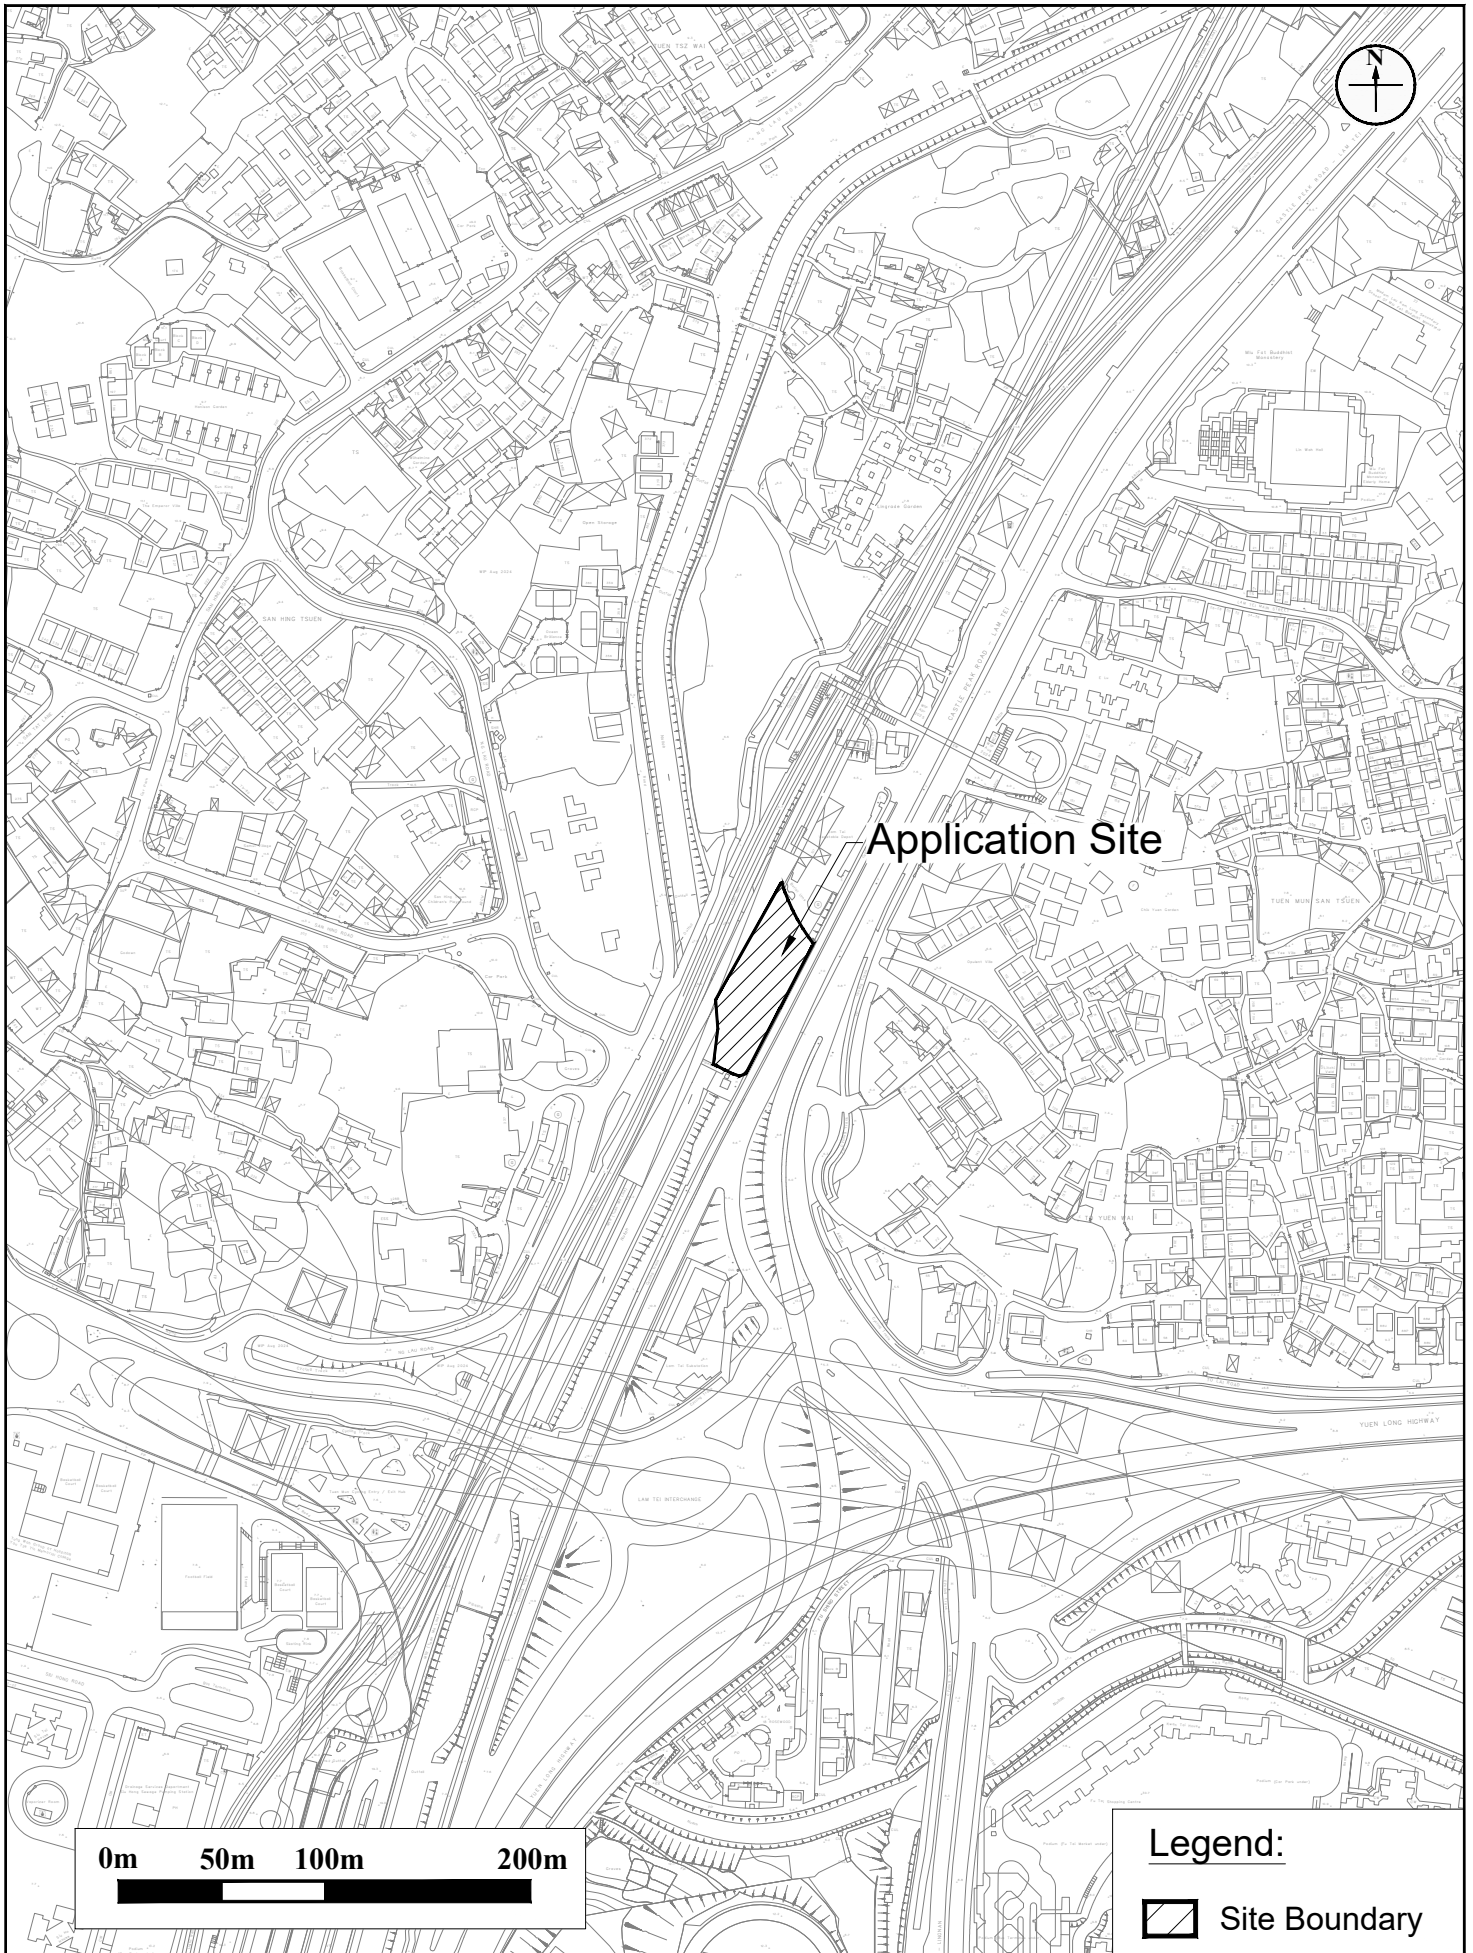


Figure: 2.1	
Title: Application Site Location and Its Environs	
Project: S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for the Proposed Residential Development (Flat) with Shop and Services Use at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei Tuen Mun	Drawn by: CM Checked by: CC
	Rev.: 1.0 Date: Oct 2025

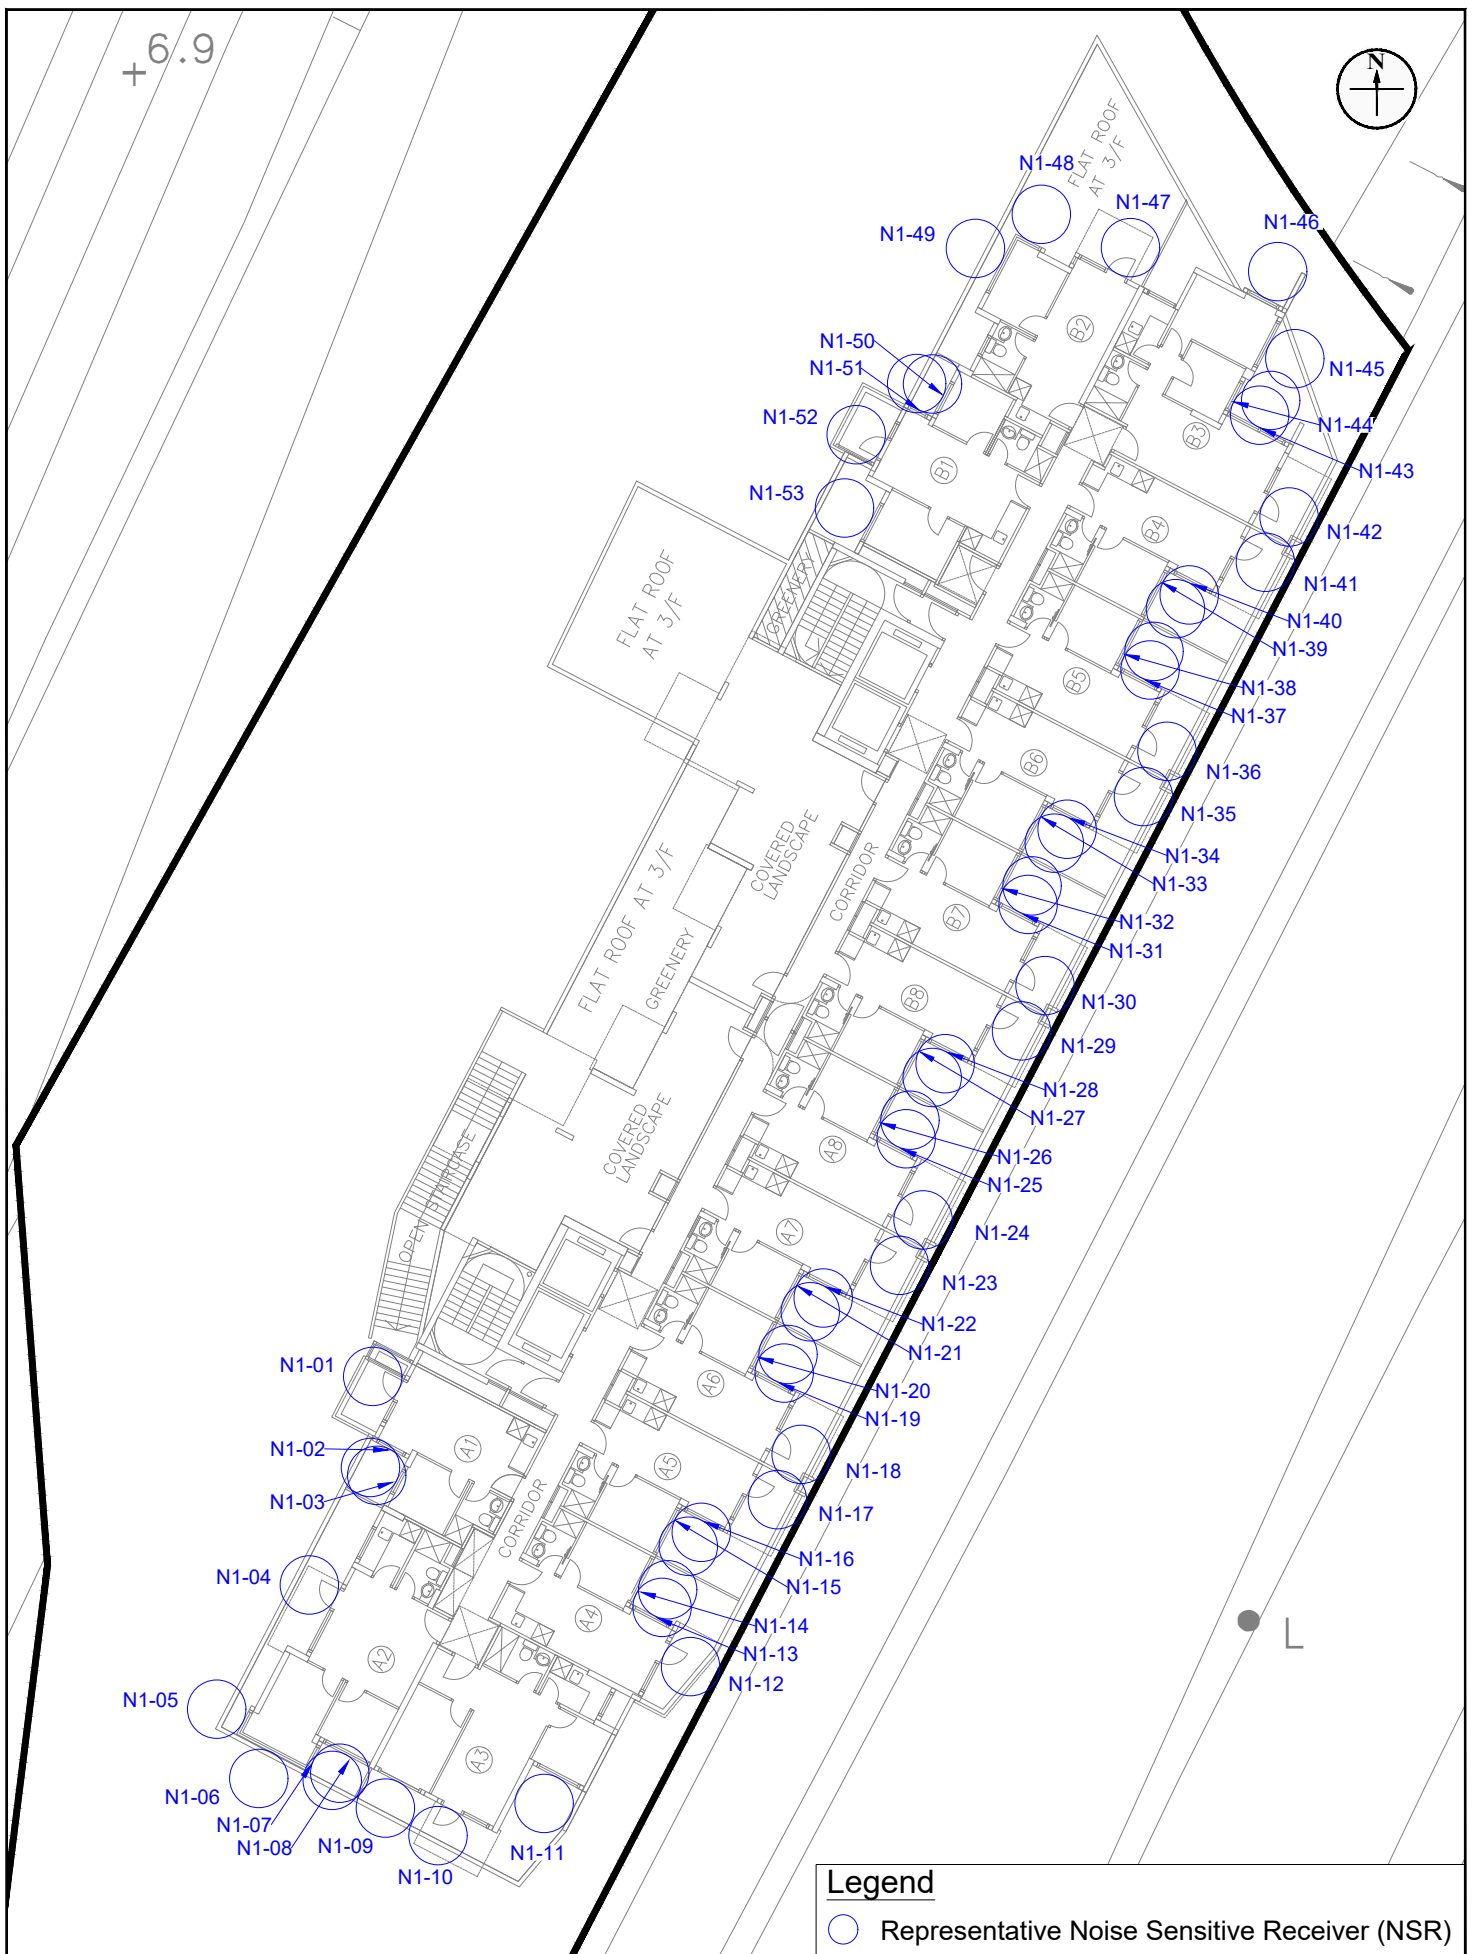


Figure: 3.1a

Title:	Locations of Representative Noise Sensitive Receivers for Road Traffic Noise Impact Assessment (3/F)
---------------	--

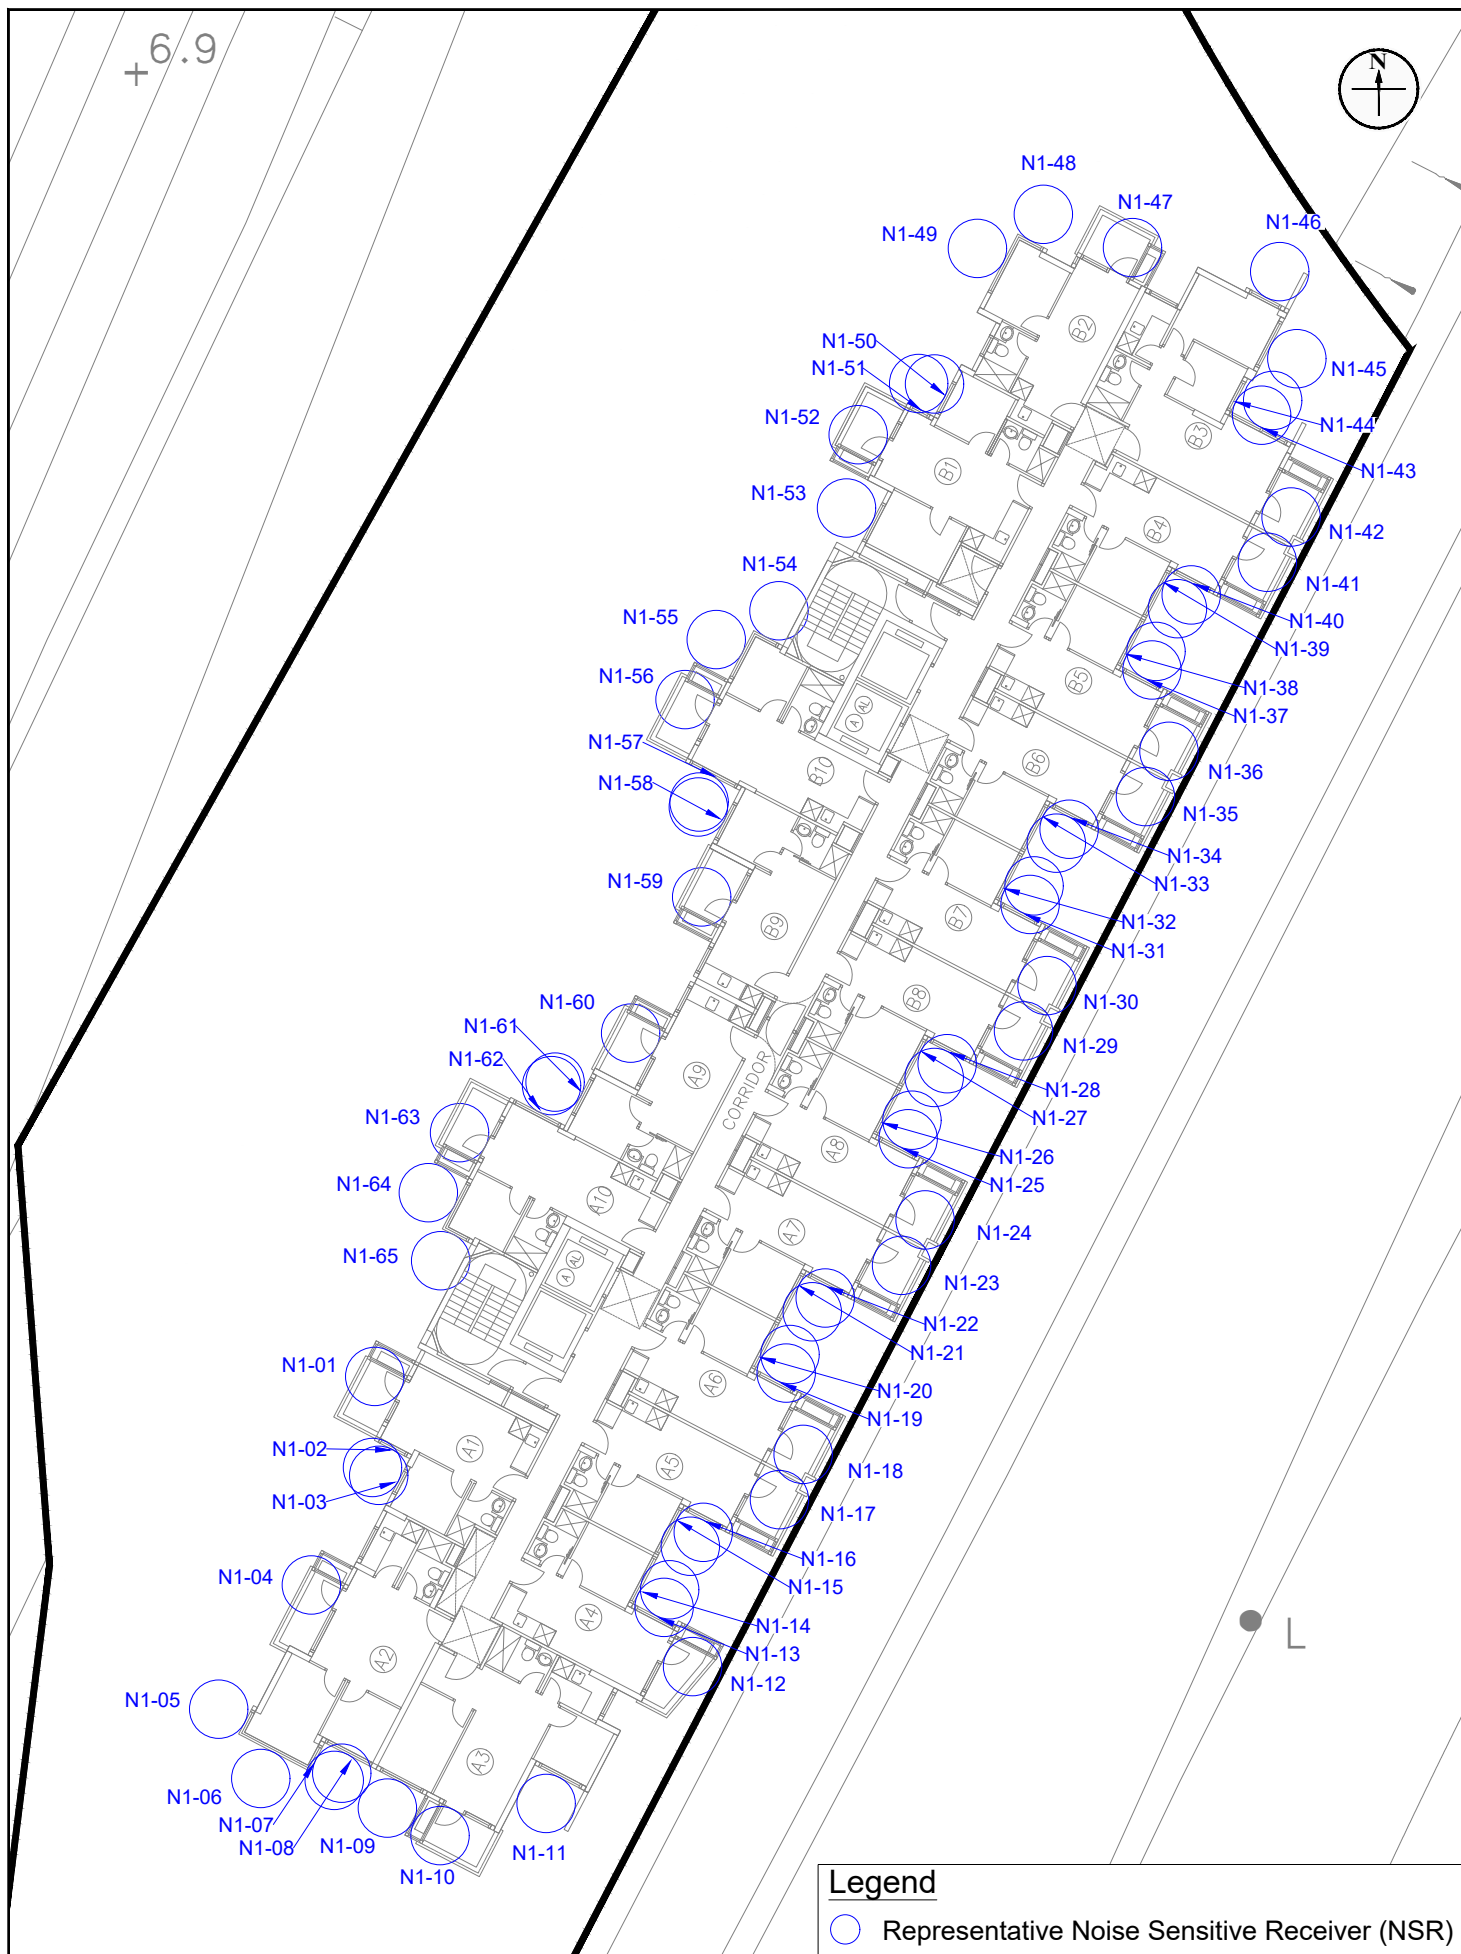


Figure: 3.1b

Title: Locations of Representative Noise Sensitive Receivers for Road Traffic Noise Impact Assessment (4/F - 19/F)

Project: S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for the Proposed Residential Development (Flat) with Shop and Services Use at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei Tuen Mun

RAMBOLL

Drawn by: CM


Checked by: CC

Rev.: 1.0

Date: Oct 2025

Legend

- Acoustic Window (Baffle Type)
- Enhanced Acoustic Balcony (Baffle Type)
- Fixed Glazing with Maintenance Window
- Acoustic Fin
- 1.5m high Solid Wall at 3/F Flat Roof
- - - Sound Absorption Material applied except Window Opening Area (3/F)

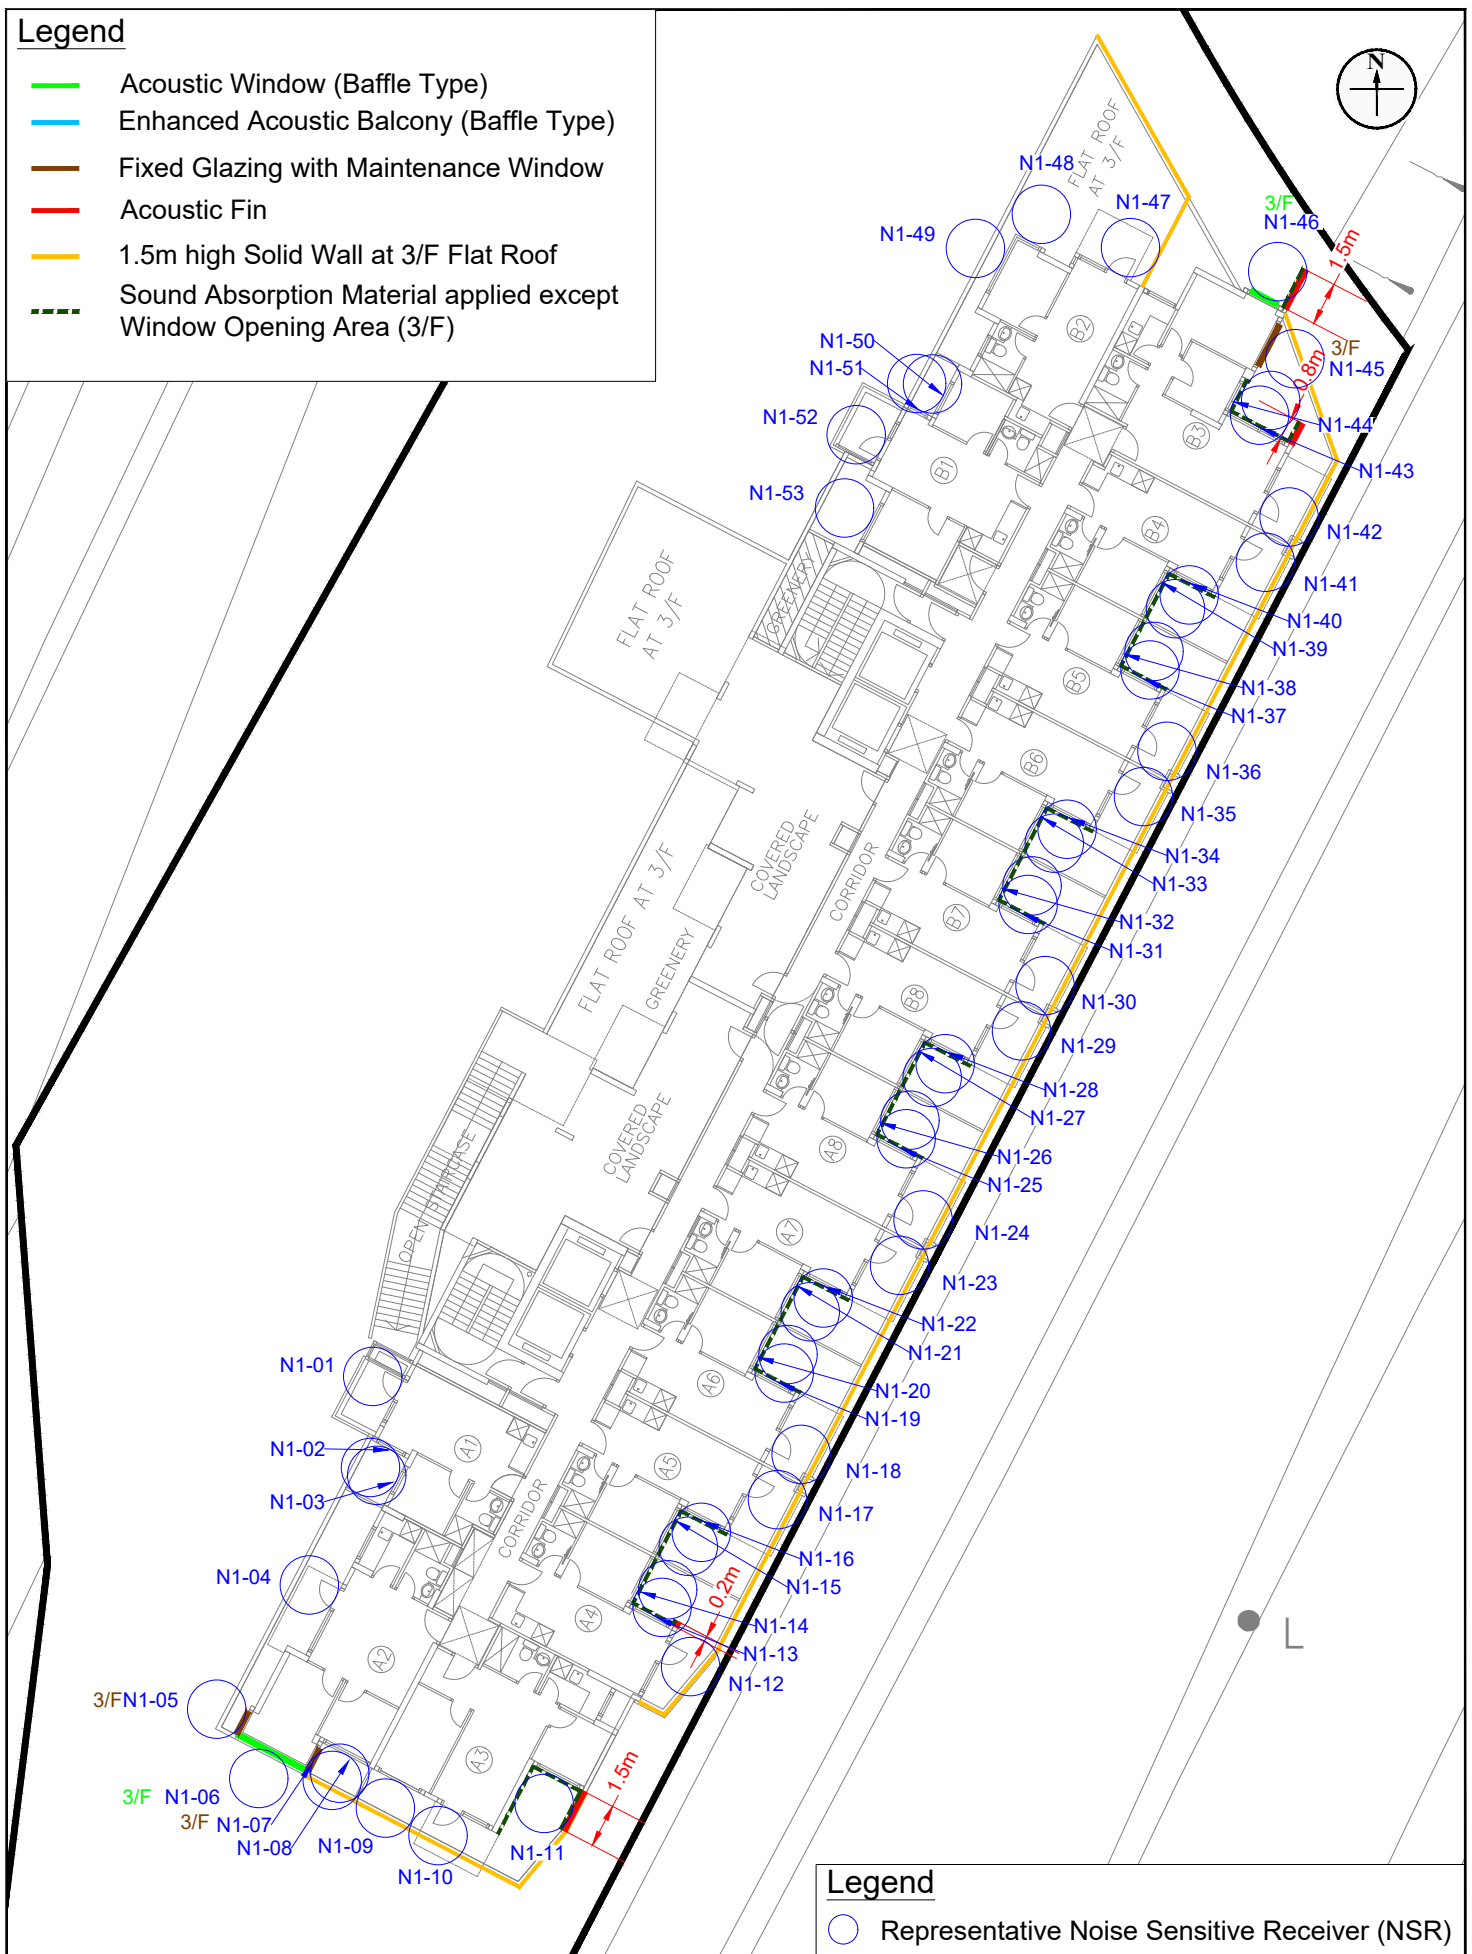

Legend

- Representative Noise Sensitive Receiver (NSR)

Figure: 3.2a

Title: Proposed Road Traffic Noise Mitigation Measures (3/F)

Project: S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for the Proposed Residential Development (Flat) with Shop and Services Use at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei Tuen Mun

RAMBOLL

Drawn by: CM

Checked by: CC

Rev.: 1.0

Date: Oct 2025

Legend

- Acoustic Window (Baffle Type)
- Enhanced Acoustic Balcony (Baffle Type)
- Fixed Glazing with Maintenance Window
- Self-Closing Door
- Acoustic Fin
- - - Sound Absorption Material applied except Window Opening Area (4/F-19/F)

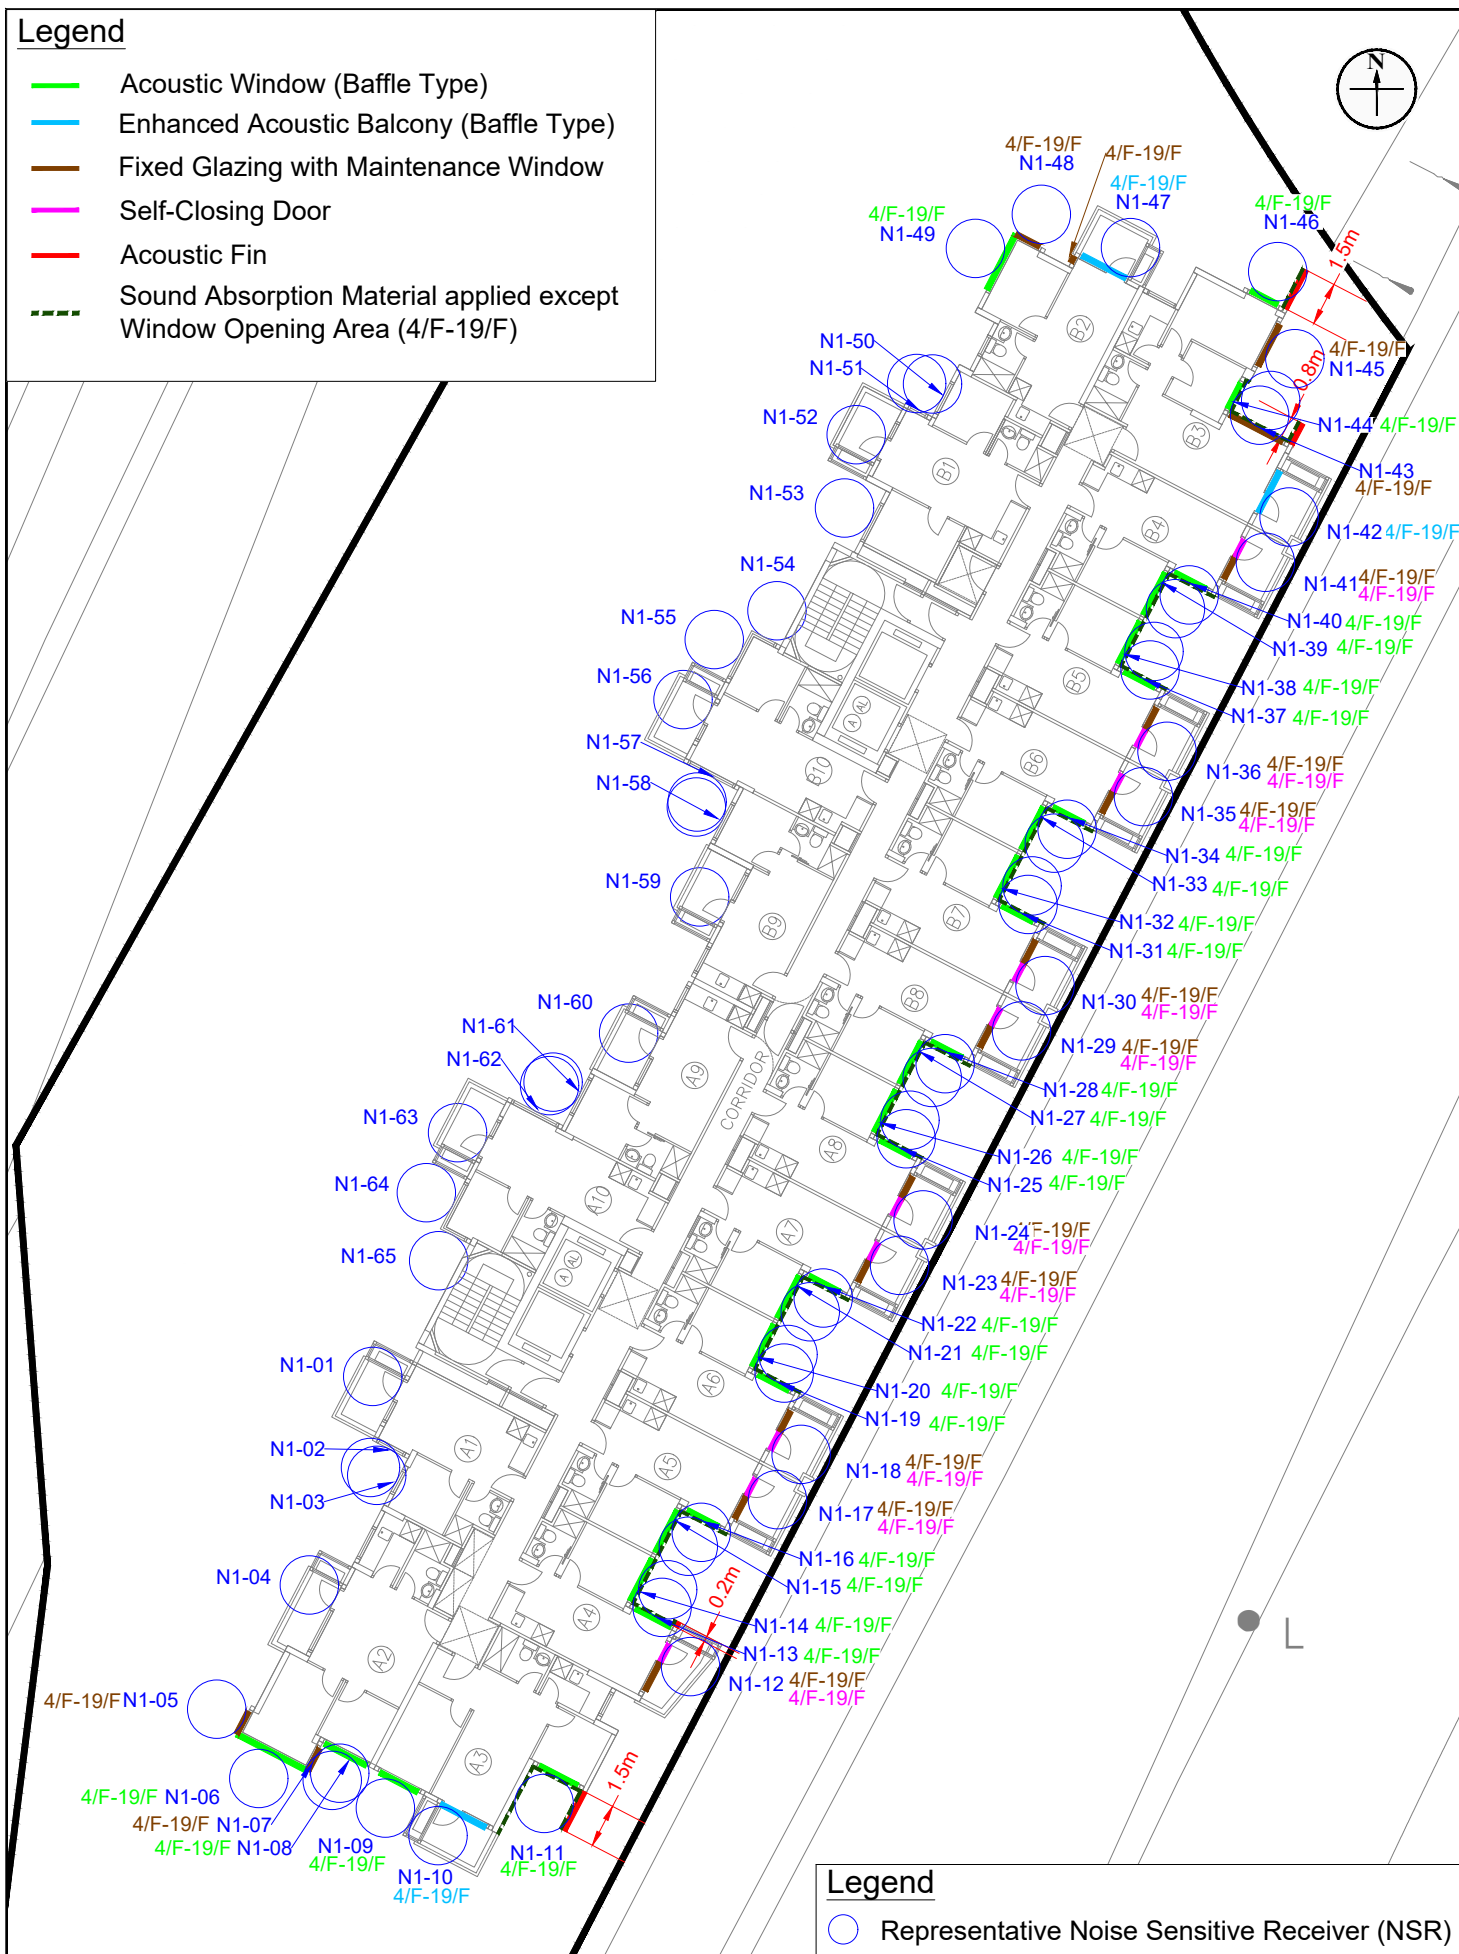


Figure: 3.2b

Title: Proposed Road Traffic Noise Mitigation Measures (4/F - 19/F)

Project: S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for the Proposed Residential Development (Flat) with Shop and Services Use at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei Tuen Mun

RAMBOLL

Drawn by: CM

Checked by: CC

Rev.: 1.0

Date: Oct 2025



Legend:

- Area Sensitivity Rating "B"
- Area Sensitivity Rating "C"

Figure: 4.1a

Title: Applicable Area Sensitivity Rating for Individual Facades (3/F)

Project: S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for the Proposed Residential Development (Flat) with Shop and Services Use at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei Tuen Mun

RAMBOLL

Drawn by: MW

Checked by: CC

Rev.: 1.0

Date: Oct 2025



Legend:

- Area Sensitivity Rating "B"
- Area Sensitivity Rating "C"

Figure: 4.1b

Title: Applicable Area Sensitivity Rating for Individual Facades (4/F - 19/F)

Project: S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for the Proposed Residential Development (Flat) with Shop and Services Use at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei Tuen Mun

RAMBOLL

Drawn by: MW

Checked by: CC

Rev.: 1.0

Date: Oct 2025

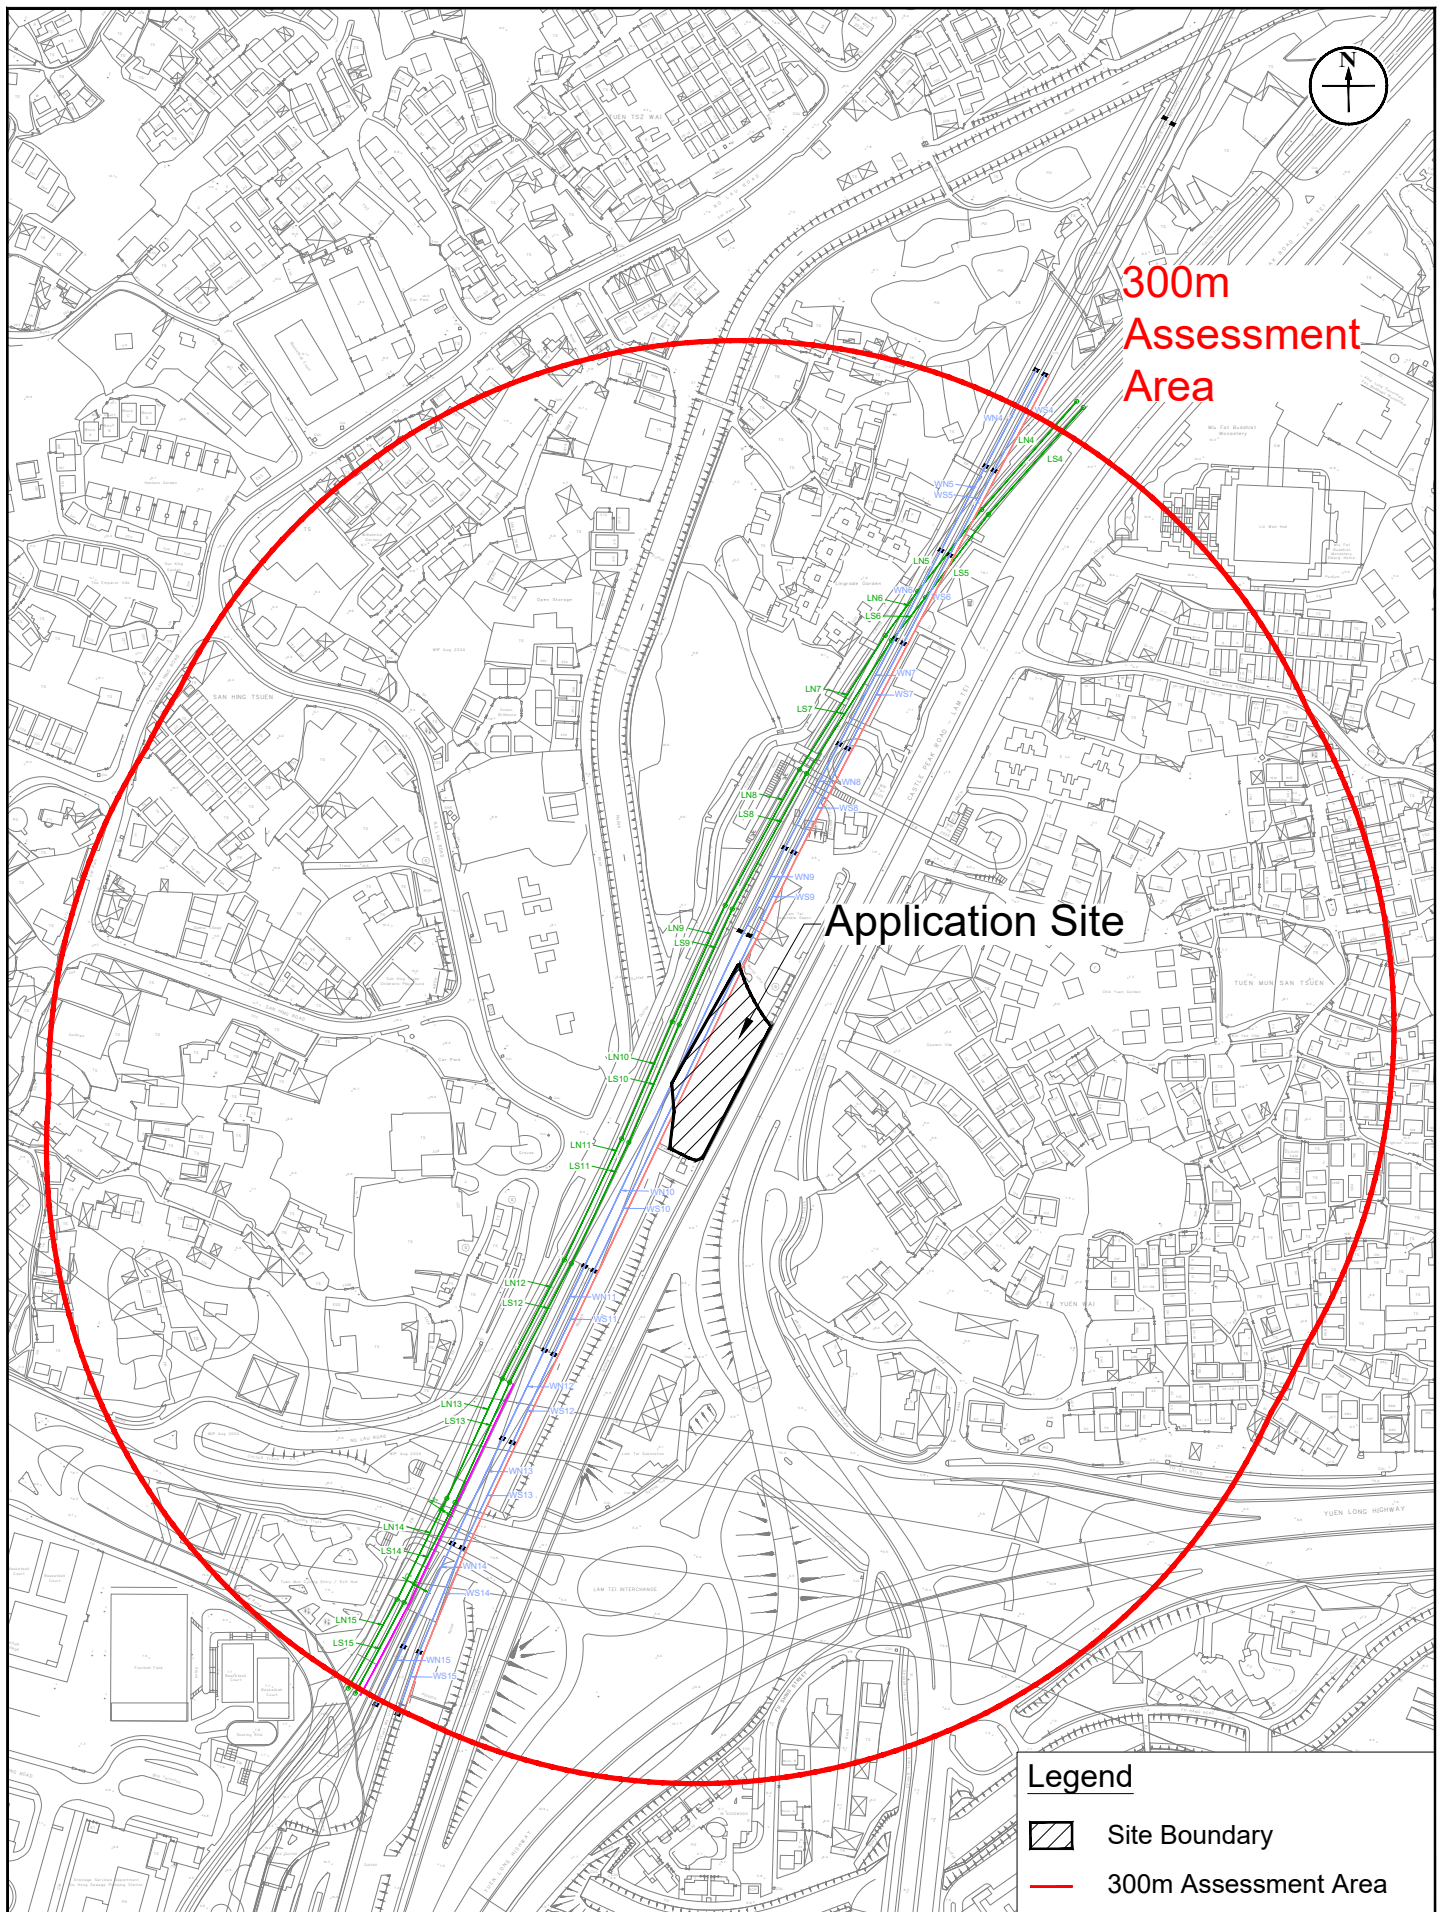


Figure: 4.2a

Title: Locations of the Identified Rail Track within 300m Assessment Area (Overview)

Project: S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for the Proposed Residential Development (Flat) with Shop and Services Use at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei Tuen Mun

RAMBOLL

Drawn by: MW

Checked by: CC

Rev.: 1.0

Date: Oct 2025

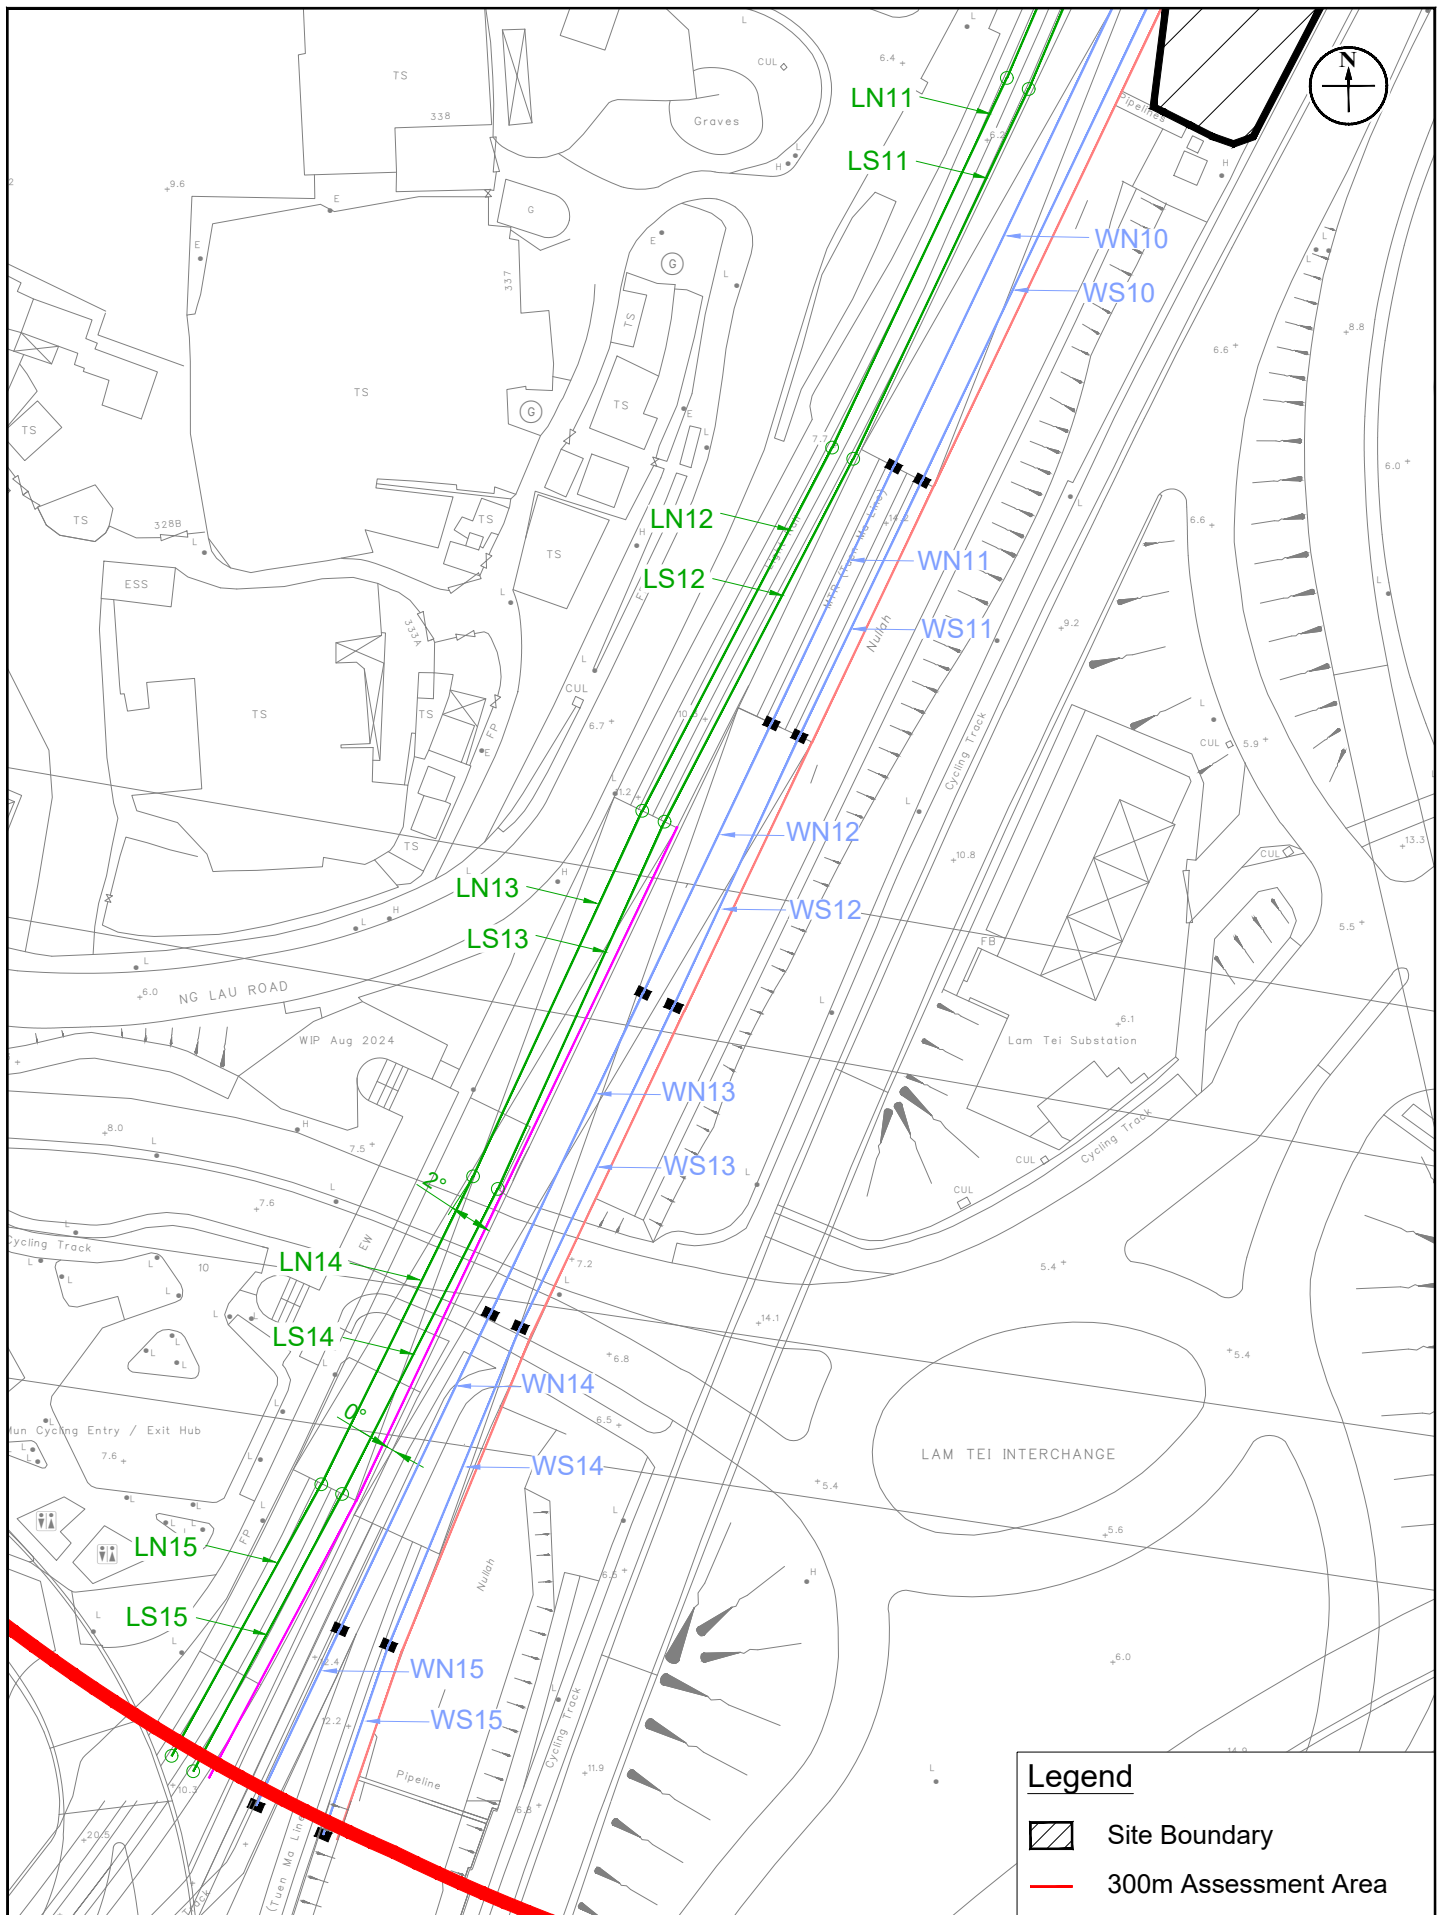


Figure: 4.2b

Title: Locations of the Identified Rail Track within 300m Assessment Area (Zoom In 1)

Project: S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for the Proposed Residential Development (Flat) with Shop and Services Use at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei Tuen Mun


RAMBOLL

Drawn by: MW

Checked by: CC

Rev.: 1.0

Date: Oct 2025

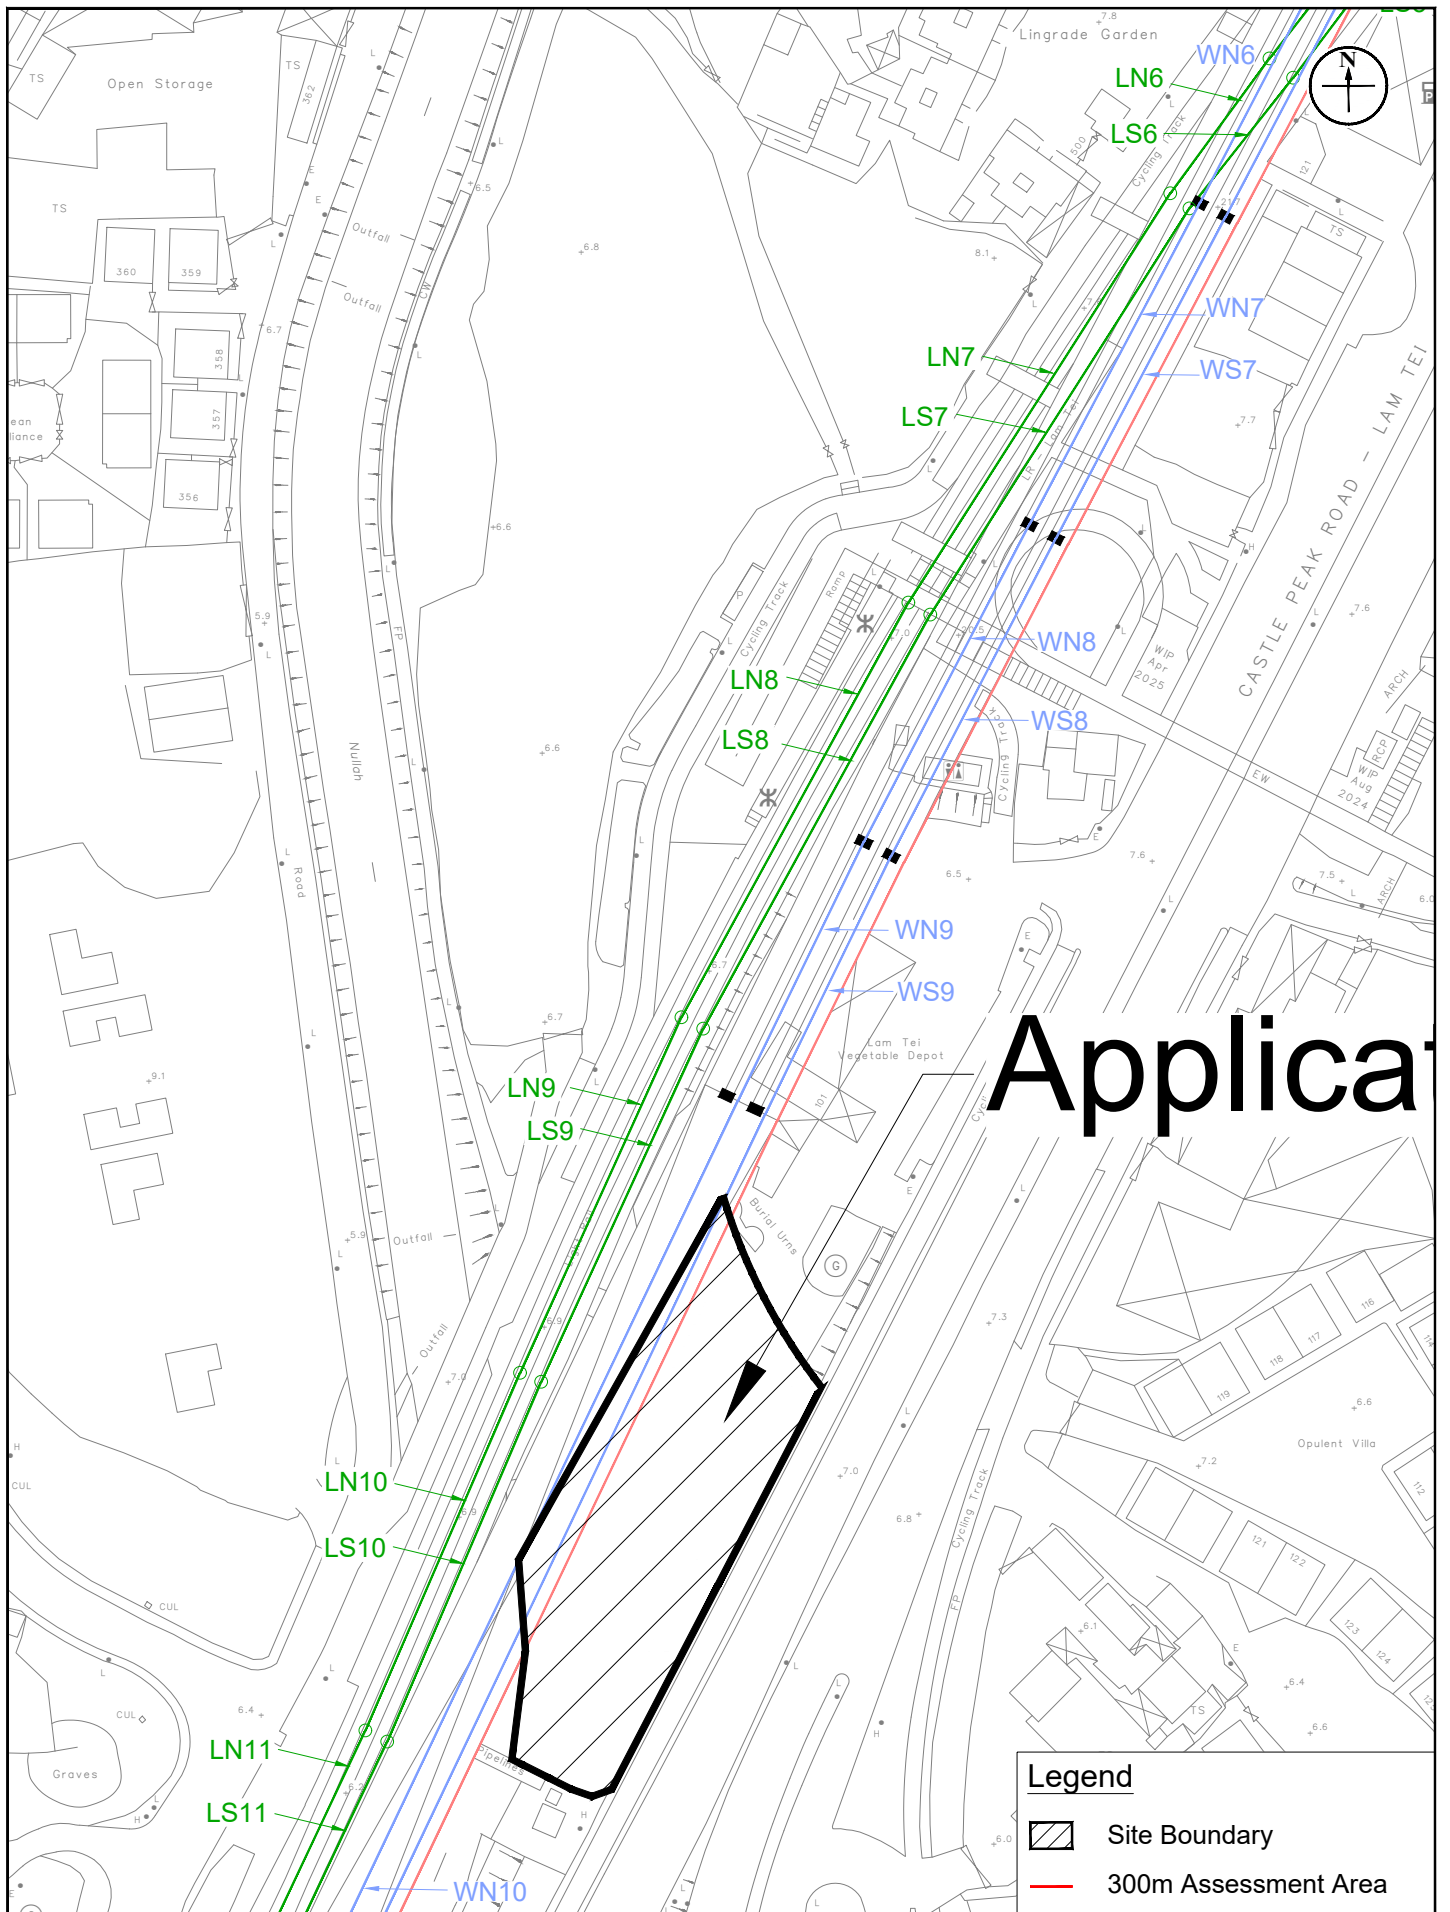

Applica

Figure: 4.2c

Title: Locations of the Identified Rail Track within 300m Assessment Area (Zoom In 2)

Project: S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for the Proposed Residential Development (Flat) with Shop and Services Use at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei Tuen Mun

RAMBOLL

Drawn by: MW


Checked by: CC

Rev.: 1.0

Date: Oct 2025

Appendix 2.1


Master Layout Plan, Floor Plans and Section Plan of the Proposed Development

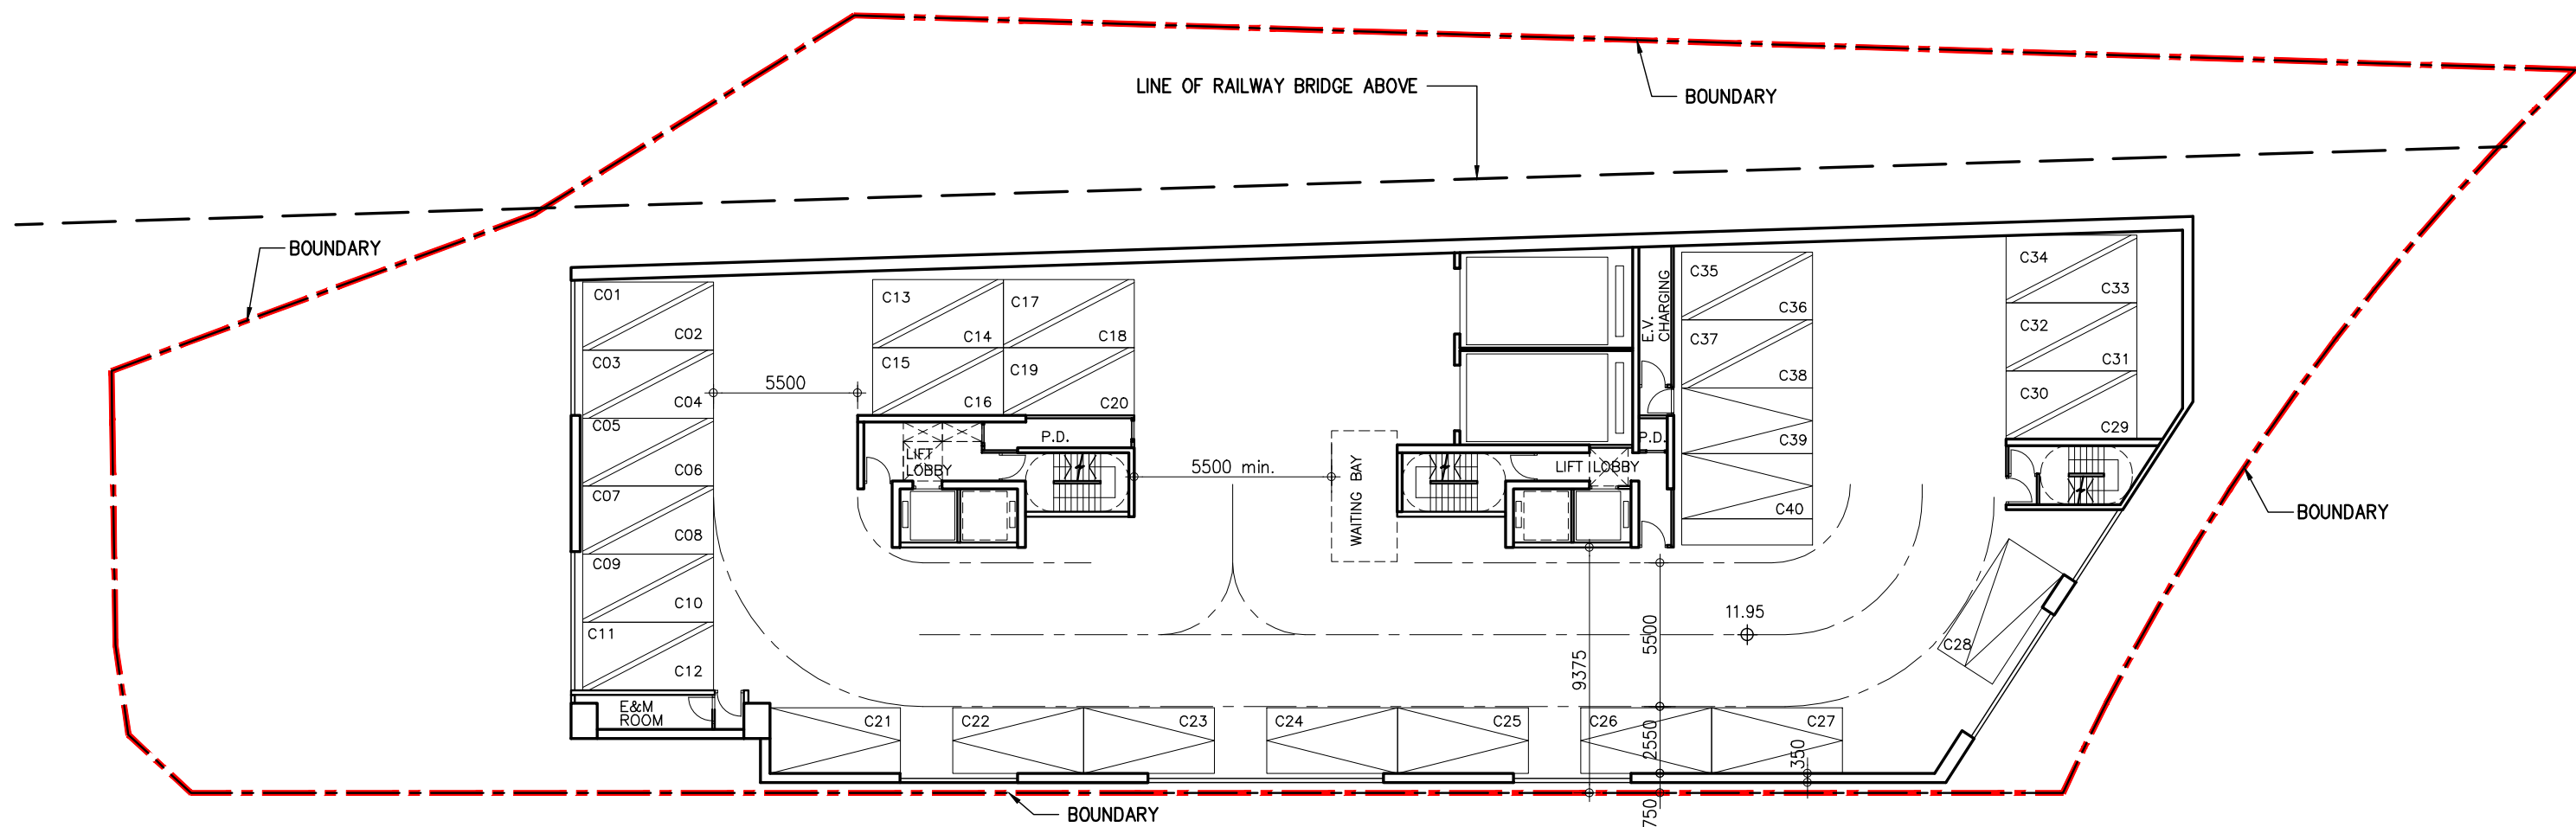

1st FLOOR PLAN

NOS. OF PRIVATE CAR PARKING = 40 NOS.


-  PRIVATE CAR PARKING
-  DOUBLE DECK CAR PARKING

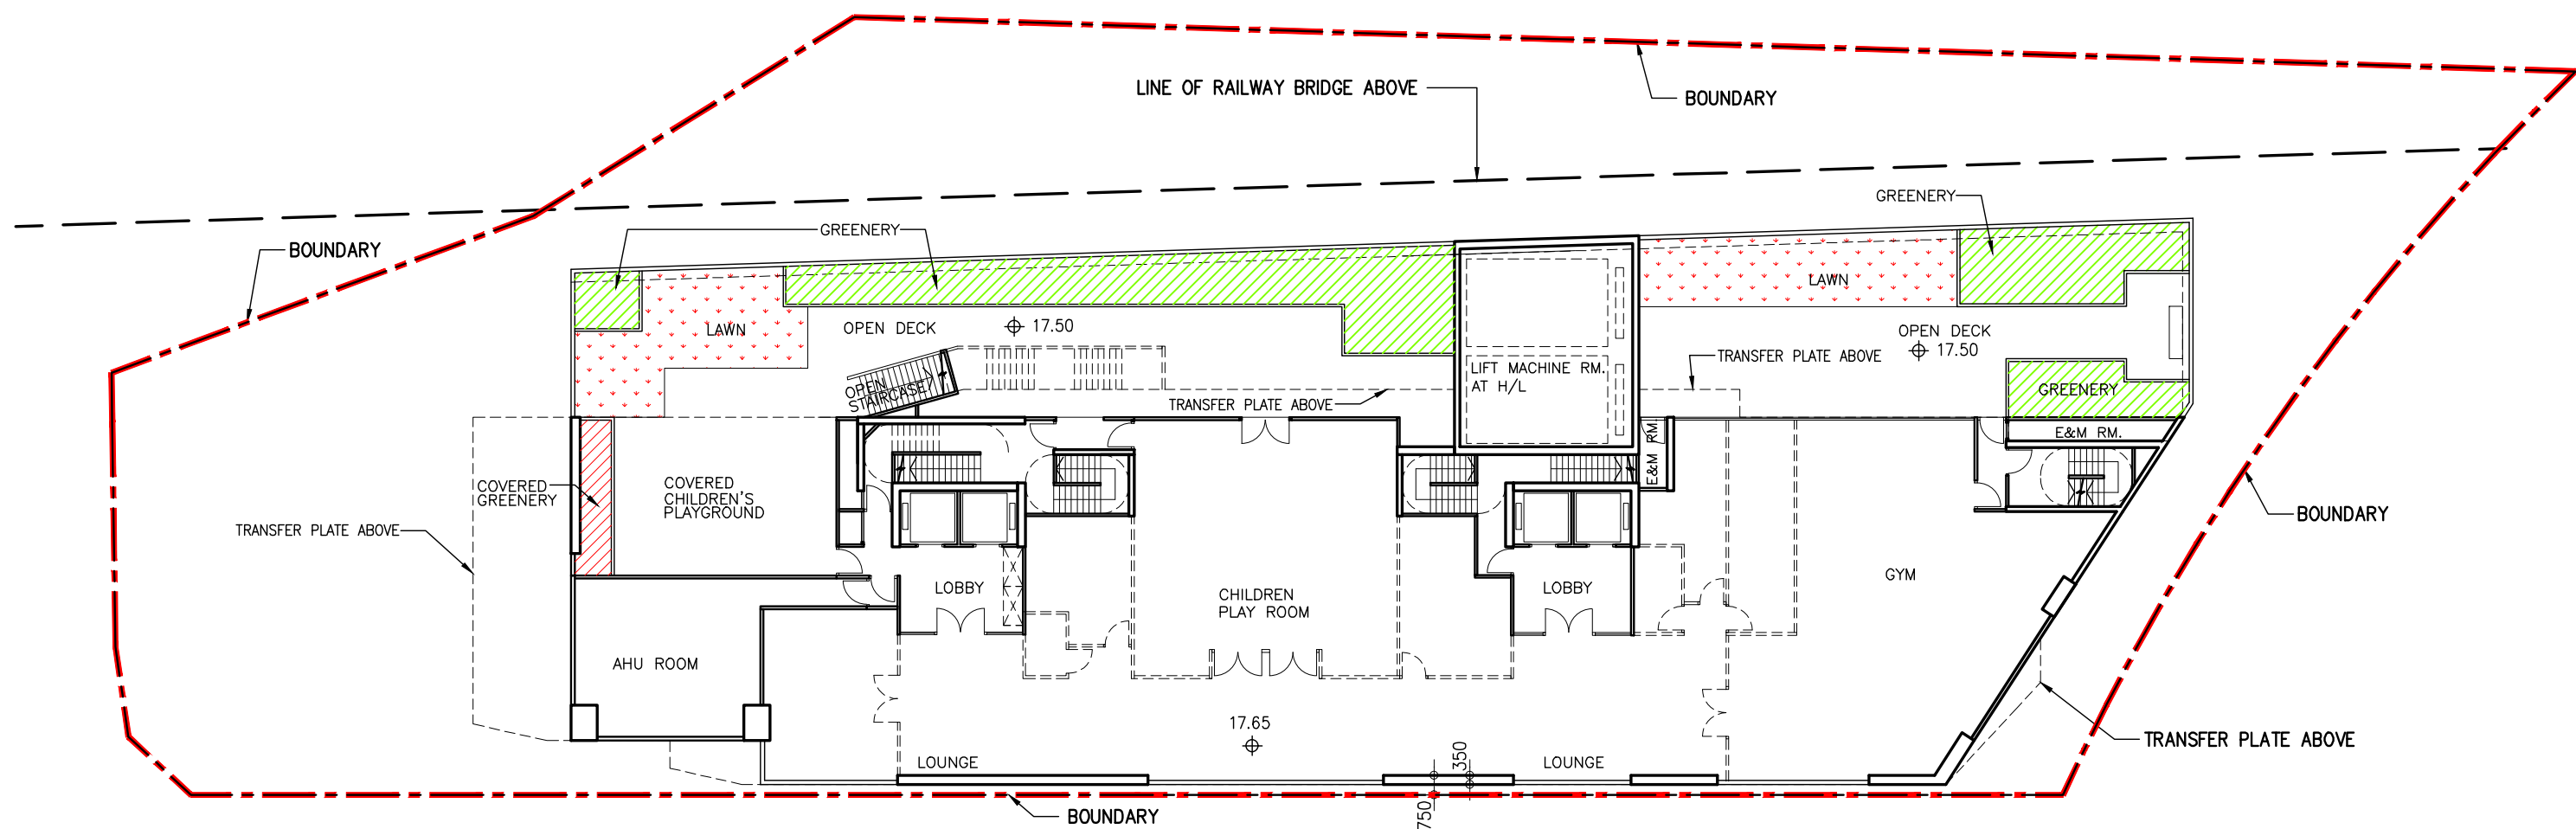

2nd FLOOR PLAN (RESIDENTIAL RECREATIONAL FACILITIES)


RECREATIONAL FACILITIES AREA = 10800.00 x 5% = 540.00 s.m.

 GREENERY / LAWN
 COVERED GREENERY

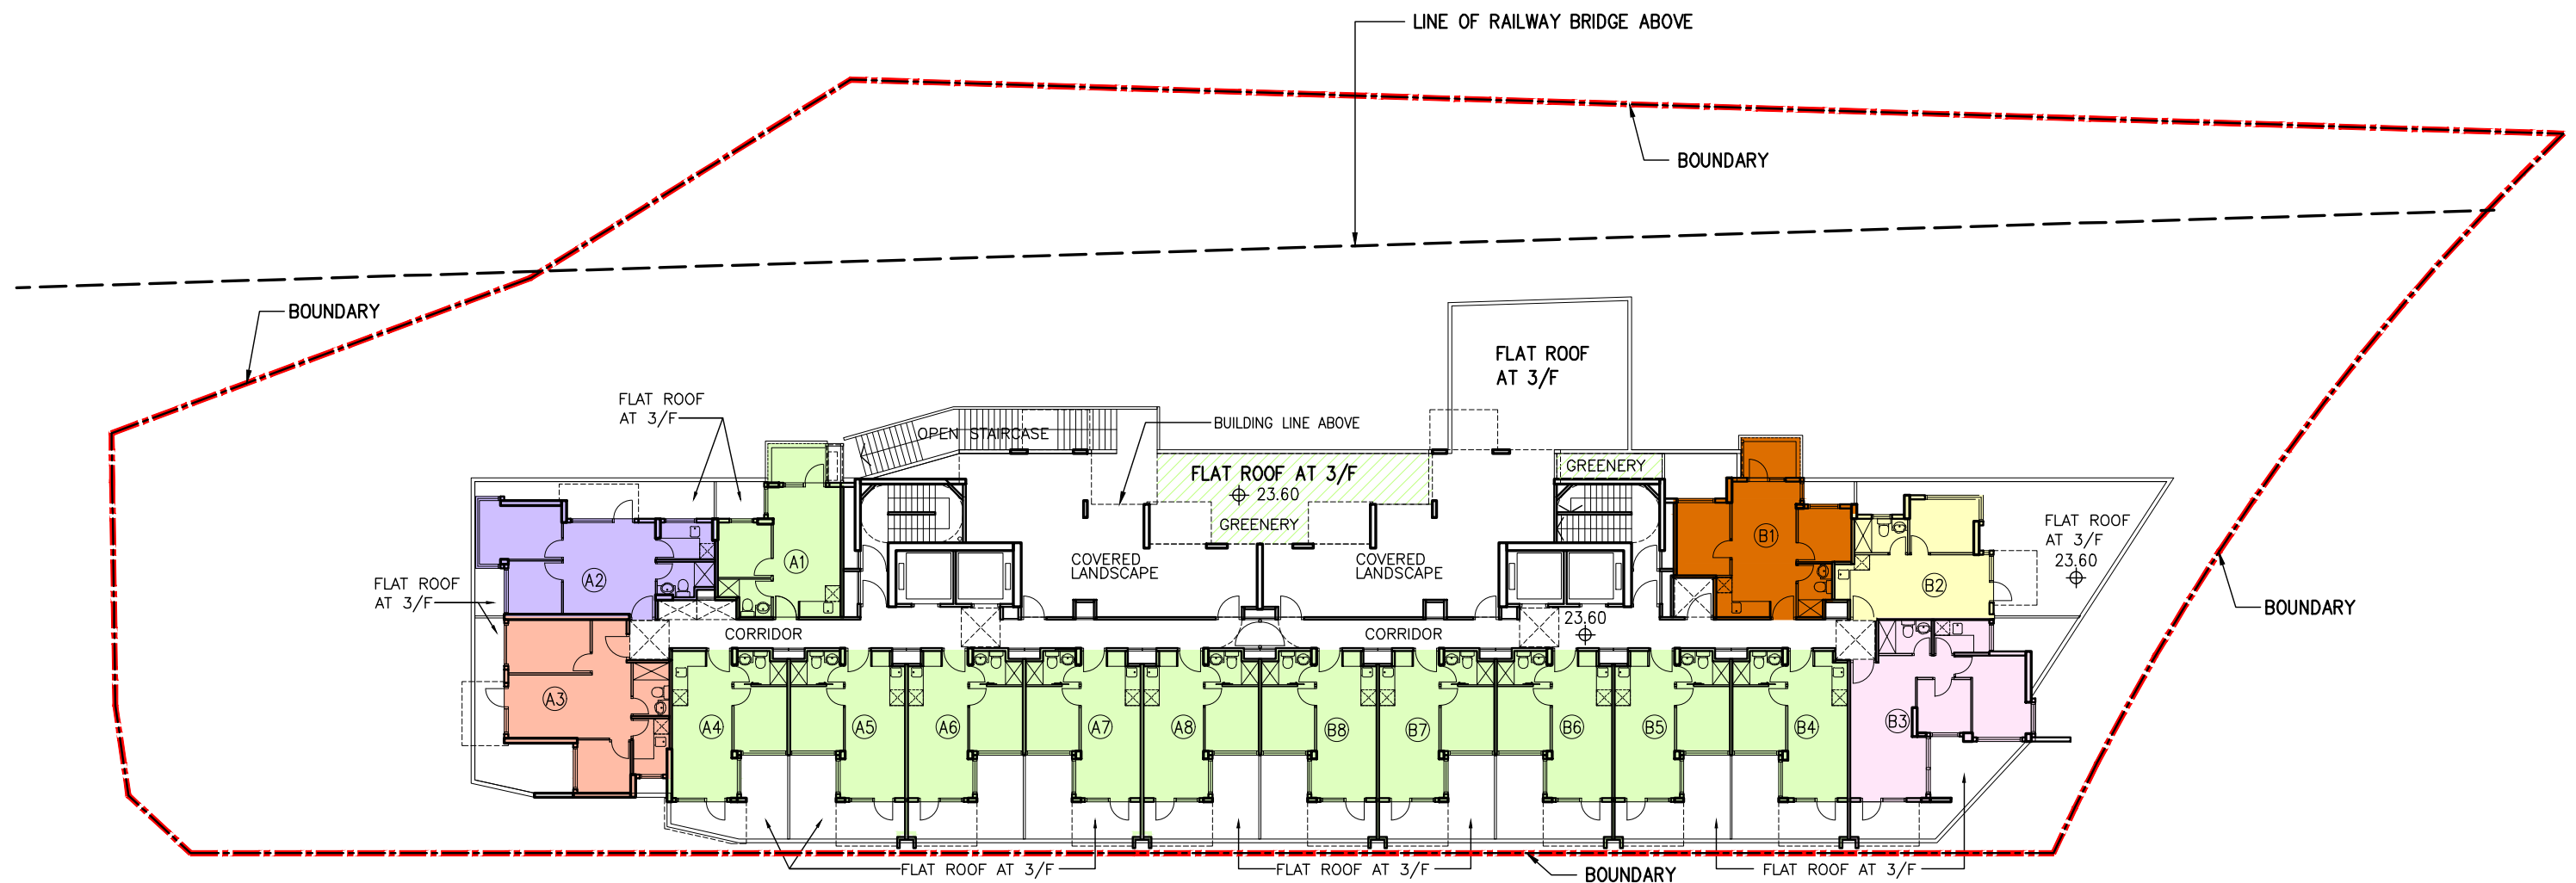

3rd FLOOR PLAN (1 STOREY)
(16 UNITS)


 GREENERY

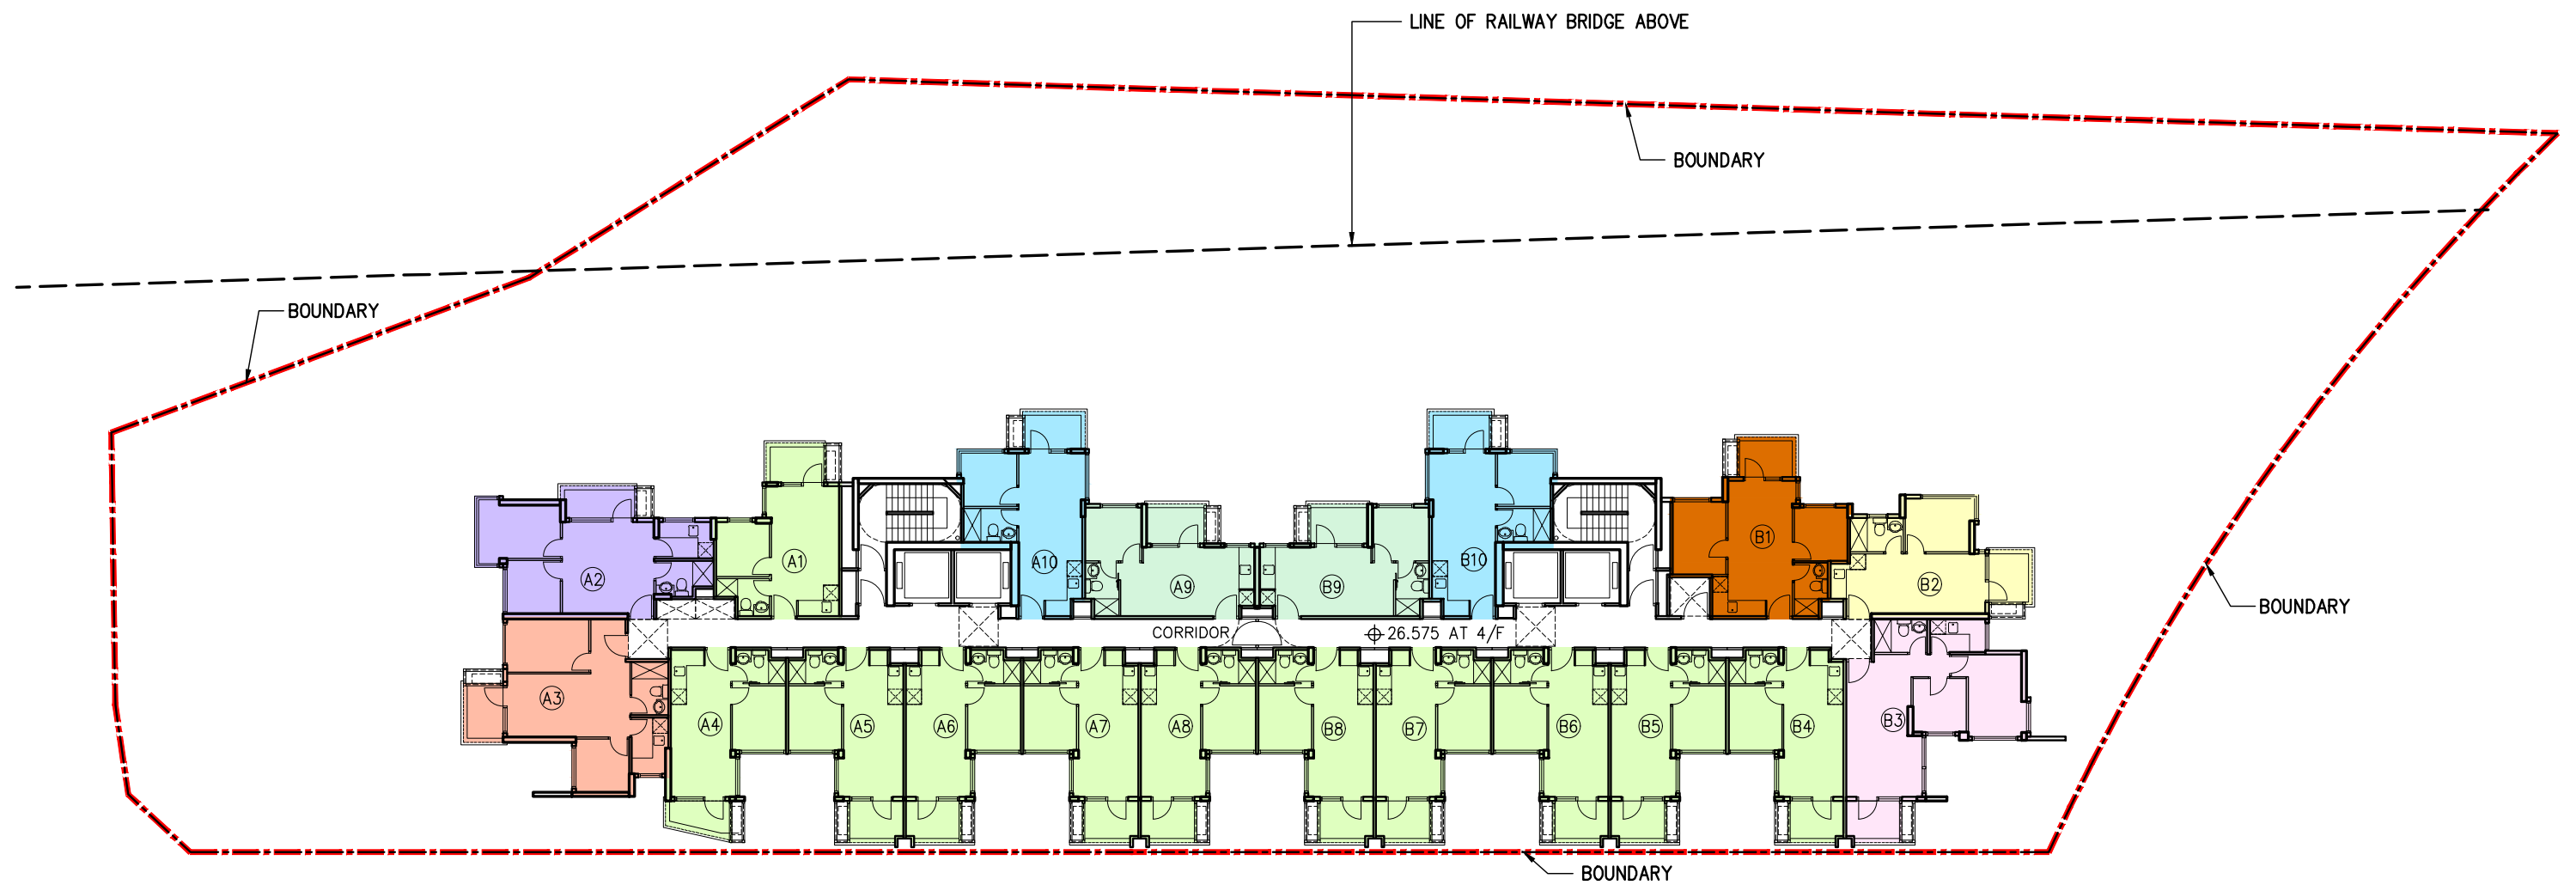

4th TO 19th FLOOR PLAN (16 STOREYS)
(20 UNITS)

Appendix 3.1

Traffic Forecast of Year 2046

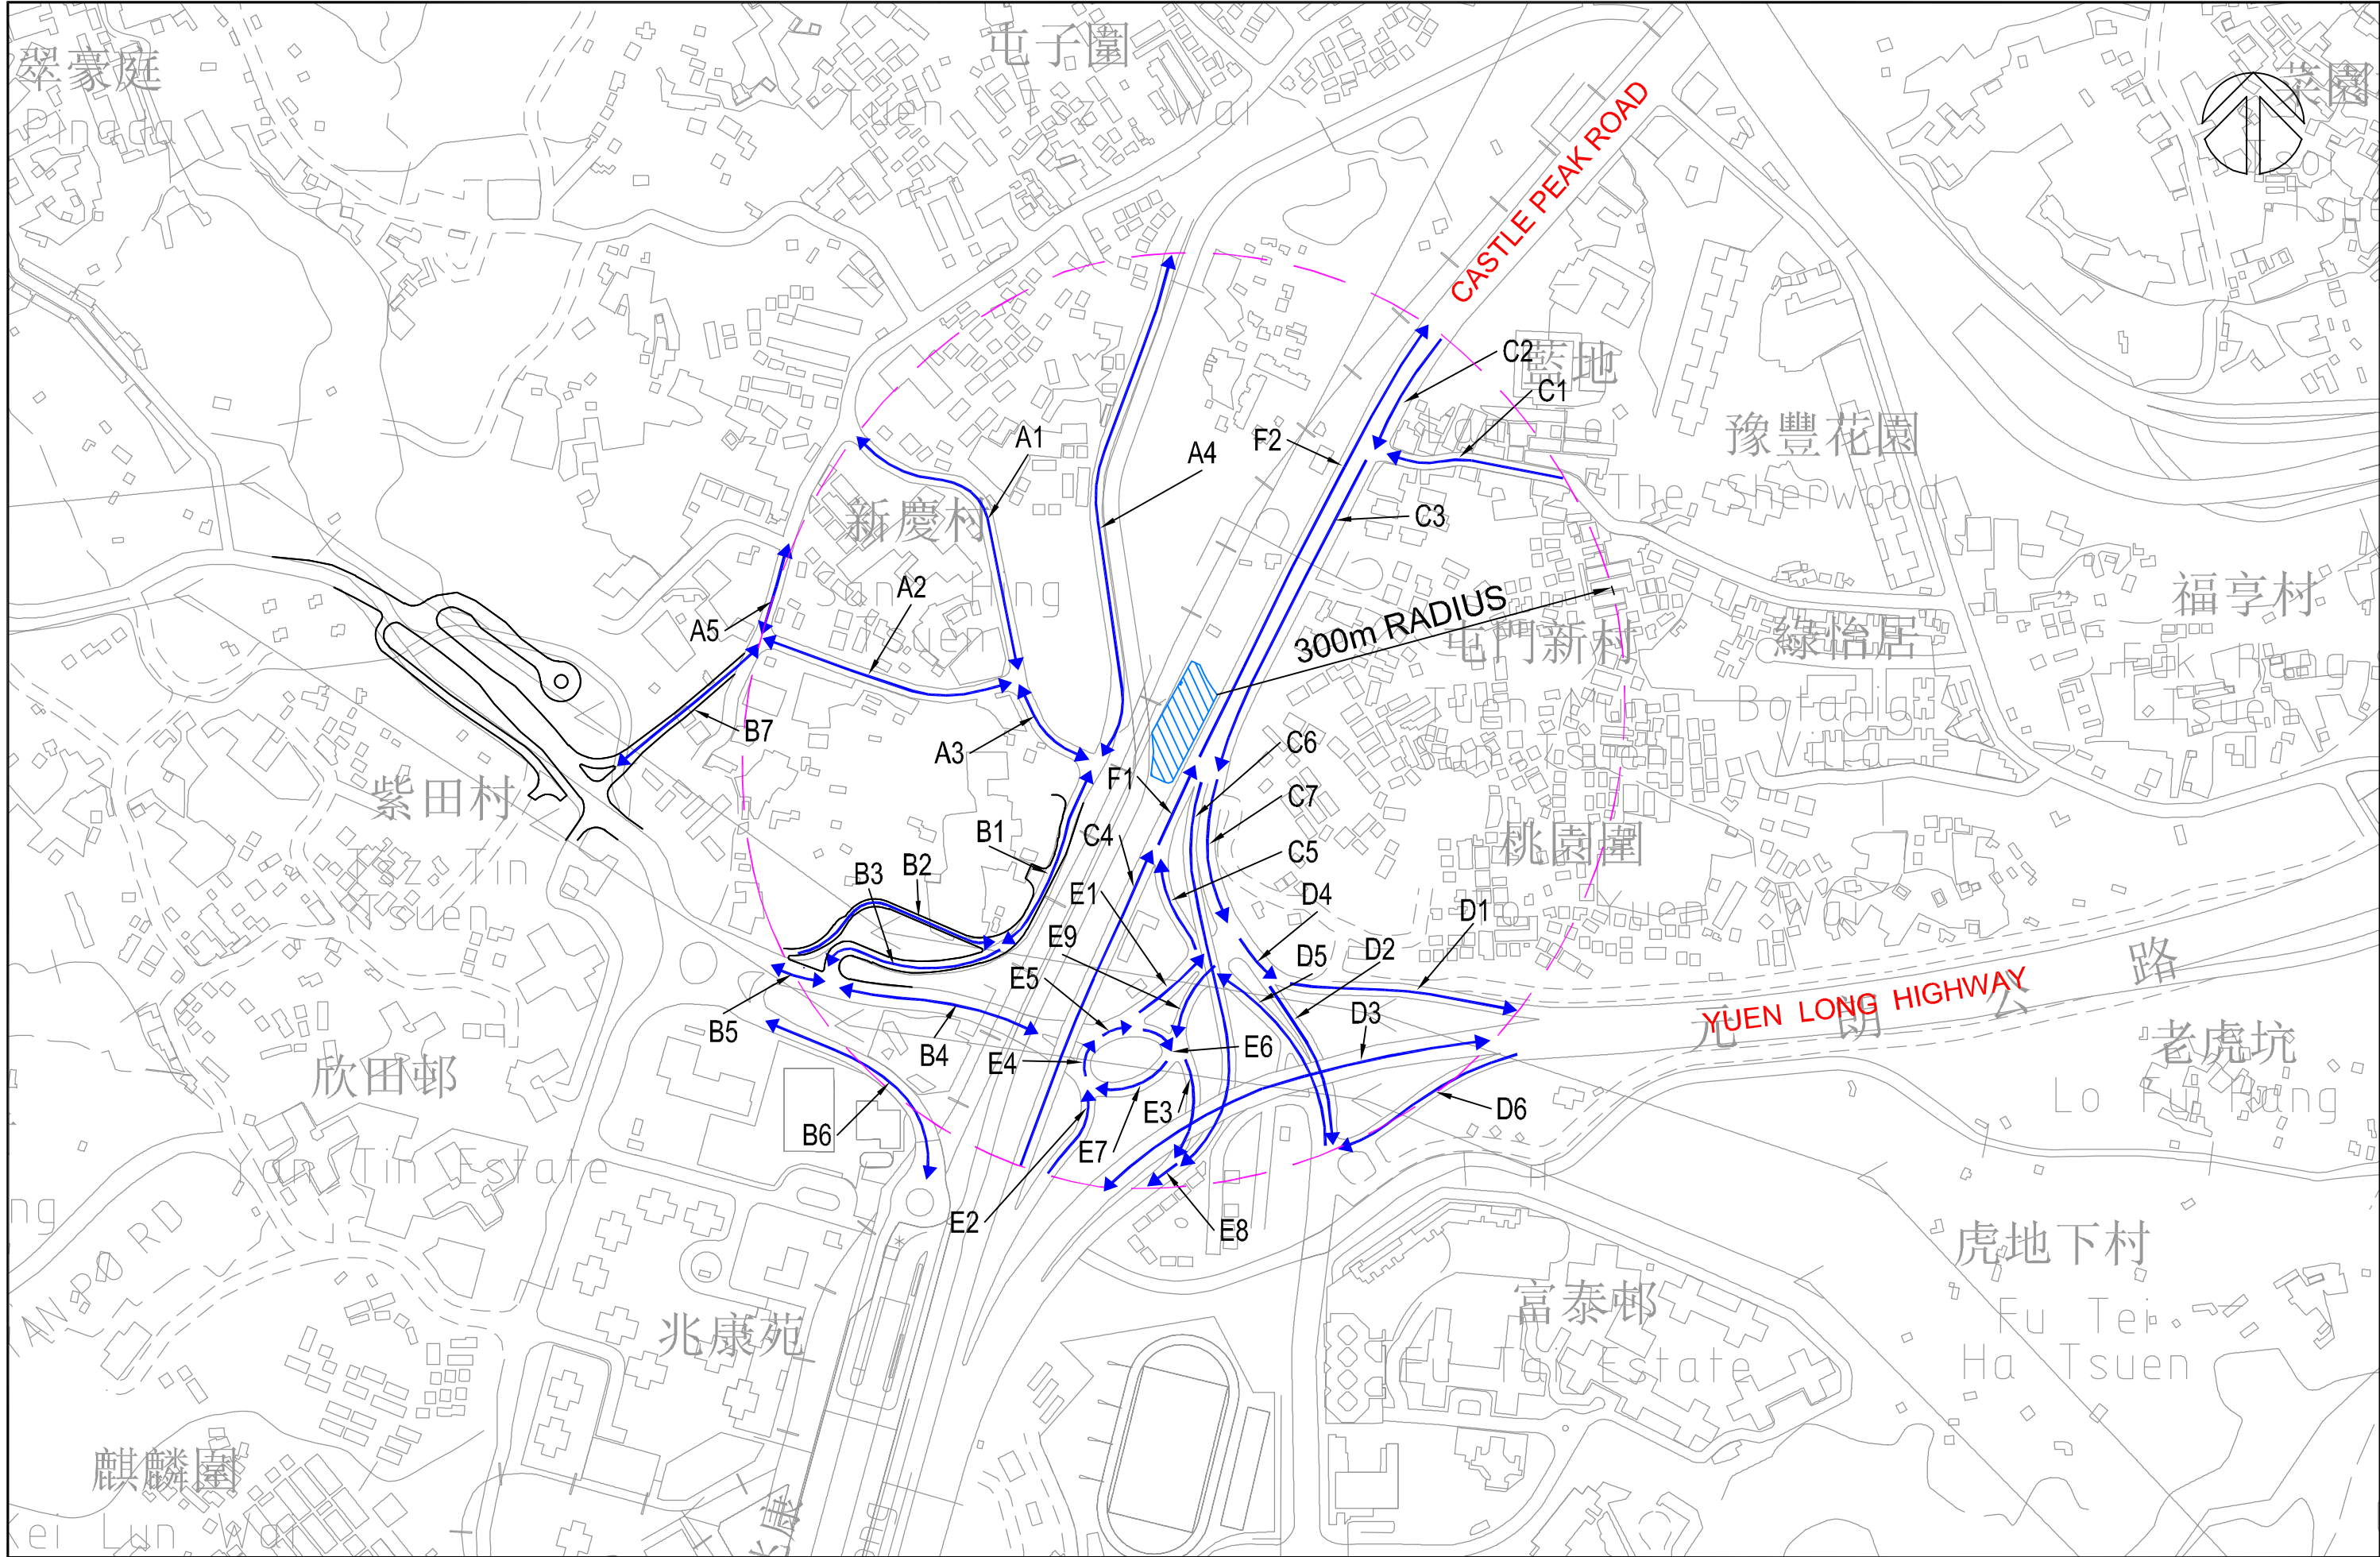

 HWSPB Traffic & Transportation Consultants Ho Wang SPB Limited	Project Title	SECTION 16 PLANNING APPLICATION FOR THE PROPOSED FLAT DEVELOPMENT, MINOR RELAXATION OF PLOT RATIO AND BUILDING HEIGHT RESTRICTION, LOTS 531 RP, 532 S.D. RP AND 532 RP IN D.D. 130 AND ADJOINING GOVERNMENT LAND, LAM TEI, TUEN MUN, NEW TERRITORIES	Scale	N. T. S.	Date	OCT 2025	Figure No.	1
	Figure Title	FLOW INDEX (NIA)	Project No.	977.4	CAD Ref.	J977.4/EIA1/F01/2025-10-09	Rev.	-

Index	Road Name	Direction	Road Speed	Observed Heavy Vehicle (%)		2046 Traffic Flows	
				AM	PM	AM	PM
F1	Lam Tei Interchange	N	70	25%	32%	1463	1420
F2	Castle Peak Road - Lam Tei	N	70	25%	32%	1463	1420
E1	Lam Tei Interchange	N	50	27%	22%	1673	1509
E2	Lam Tei Interchange	N	50	26%	28%	763	838
E3	Lam Tei Interchange	S	50	28%	19%	1324	746
E4	Lam Tei Interchange	N	50	19%	16%	414	457
E5	Lam Tei Interchange	E	50	28%	22%	2437	2082
E6	Lam Tei Interchange	E	50	33%	24%	758	583
E7	Lam Tei Interchange	W	50	22%	24%	1383	1388
E8	Lam Tei Interchange	S	70	30%	20%	2516	1652
E9	Lam Tei Interchange	S	50	23%	21%	1838	1483
D1	Lam Tei Interchange	E	50	29%	22%	1600	1420
D2	Lam Tei Interchange	E	50	29%	21%	439	440
D3	Yuen Long Highway	N	80	27%	28%	3630	4089
D3	Yuen Long Highway	S	80	40%	24%	2857	3280
D4	Lam Tei Interchange	E	50	29%	22%	1842	1672
D5	Lam Tei Interchange	N	50	26%	26%	1654	1429
D6	Lam Tei Interchange	W	50	24%	26%	1642	1242
C1	Lam Tei Main Street	W	50	16%	6%	295	444
C2	Castle Peak Road - Lam Tei	S	70	28%	20%	1936	1477
C3	Castle Peak Road - Lam Tei	S	70	28%	20%	2093	1748
C4	Lam Tei Interchange	N	70	23%	31%	899	887
C5	Lam Tei Interchange	N	50	24%	31%	517	492
C6	Lam Tei Interchange	S	70	30%	19%	1195	887
C7	Lam Tei Interchange	S	50	30%	22%	891	855
B1	Ng Lau Street	N	50	20%	24%	482	550
B1	Ng Lau Street	S	50	24%	13%	733	458
B2	Ng Lau Street	N	50	20%	24%	482	550
B3	Ng Lau Street	S	50	24%	13%	733	458
B4	Lam Tei Interchange	E	50	29%	24%	2012	1627
B4	Lam Tei Interchange	W	50	25%	29%	1733	1750
B5	Lam Tei Interchange	E	50	28%	25%	2045	1698
B5	Lam Tei Interchange	W	50	23%	28%	1710	1720
B6	Access Road to Siu Hong Stat	E	50	34%	38%	317	270
B6	Access Road to Siu Hong Stat	W	50	33%	40%	219	164
B7	Unnamed Road	N	50	0%	25%	5	5
B7	Unnamed Road	S	50	4%	12%	50	14
A1	Ng Lau Street	N	50	16%	23%	138	207
A1	Ng Lau Street	S	50	23%	14%	289	190
A2	San Hing Road	E	50	22%	20%	21	23
A2	San Hing Road	W	50	33%	38%	18	9
A3	Ng Lau Street	N	50	17%	23%	150	225
A3	Ng Lau Street	S	50	24%	15%	300	194
A4	Unnamed Road	N	50	17%	23%	142	158
A4	Unnamed Road	S	50	24%	15%	233	130
A5	Unnamed Road	N	50	21%	21%	26	29
A5	Unnamed Road	S	50	13%	23%	69	23

Appendix 3.2

Predicted Road Traffic Noise Impact Assessment Results (Base Case Scenario)

Predicted Road Traffic Noise (L10, dB(A)) at Selected Sensitive Receivers
Base Case (AM Peak Flow - Worst Case)

Tower 1																																		
Floor	mPD	N1-01	N1-02	N1-03	N1-04	N1-05	N1-06	N1-07	N1-08	N1-09	N1-10	N1-11	N1-12	N1-13	N1-14	N1-15	N1-16	N1-17	N1-18	N1-19	N1-20	N1-21	N1-22	N1-23	N1-24	N1-25	N1-26	N1-27	N1-28	N1-29	N1-30	N1-31	N1-32	
3/F	23.6	70	70	70	70	75	78	76	77	77	77	77	80	72	70	73	72	79	79	70	70	72	72	79	79	70	69	72	72	79	79	70	69	
4/F	26.6	70	70	70	70	76	78	77	77	78	78	79	81	77	76	77	77	80	80	77	76	77	77	80	80	76	76	77	77	80	80	76	76	
5/F	29.6	70	70	70	70	76	77	77	77	78	78	79	80	78	77	78	78	80	80	78	77	78	78	80	80	77	77	78	78	80	80	78	77	
6/F	32.5	70	70	70	70	76	77	77	77	78	78	79	80	78	77	78	78	80	80	78	77	78	78	80	80	77	77	78	78	80	80	78	77	
7/F	35.5	70	70	70	70	75	77	77	77	78	78	79	80	78	77	78	78	80	80	78	77	78	78	80	80	77	77	78	78	80	80	77	76	
8/F	38.5	70	70	70	70	75	77	77	77	78	78	79	78	77	77	78	78	79	79	77	77	78	78	79	79	77	76	77	77	79	79	77	76	
9/F	41.5	70	70	70	70	75	77	77	77	78	78	79	78	77	77	78	78	79	79	77	77	78	78	79	79	77	76	77	77	79	79	77	76	
10/F	44.4	70	69	70	70	75	77	77	77	78	78	79	77	76	77	78	79	79	77	76	77	77	79	79	77	76	77	77	79	79	77	76		
11/F	47.4	70	69	69	70	75	77	76	77	77	78	79	77	76	77	77	79	79	77	76	77	77	79	79	76	76	77	77	79	79	76	75		
12/F	50.4	69	69	69	70	75	77	76	76	77	77	78	79	77	76	77	77	78	78	76	76	77	77	78	78	76	75	76	77	78	78	76	75	
13/F	53.4	69	69	69	69	75	76	76	76	77	77	77	78	77	76	77	77	78	78	76	76	76	77	78	78	76	75	76	76	78	78	76	75	
14/F	56.3	69	69	69	69	75	76	76	76	76	77	77	78	77	75	76	77	78	78	76	75	76	77	78	78	76	75	76	76	78	78	76	75	
15/F	59.3	69	69	69	69	74	76	76	76	76	76	77	77	78	76	75	76	77	78	78	76	75	76	76	78	78	75	75	76	76	78	78	76	74
16/F	62.3	69	69	69	69	74	76	76	76	76	76	77	77	78	76	75	76	76	78	78	76	75	76	76	78	78	75	75	76	76	78	78	75	74
17/F	65.3	69	69	69	69	74	76	76	76	76	76	76	77	78	76	75	76	76	78	78	75	75	76	76	77	77	75	74	76	76	77	77	75	74
18/F	68.2	69	69	69	69	74	76	75	76	76	76	77	77	76	75	76	76	77	77	75	75	76	76	77	77	75	74	75	76	77	77	75	74	
19/F	71.2	69	69	69	69	74	76	75	76	76	76	77	77	76	75	76	76	77	77	75	75	75	76	77	77	75	74	75	75	77	77	75	74	
Max Noise Level		70	70	70	70	76	78	77	77	78	78	79	81	78	77	78	78	80	80	78	77	78	78	80	80	77	77	78	78	80	80	78	77	
Exceedance		0				17					17			17			17		17		17		17		17		17		17		17		17	

Floor	mPD	N1-32	N1-34	N1-35	N1-36	N1-37	N1-38	N1-39	N1-40	N1-41	N1-42	N1-43	N1-44	N1-45	N1-46	N1-47	N1-48	N1-49	N1-50	N1-51	N1-52	N1-53	N1-54	N1-55	N1-56	N1-57	N1-58	N1-59	N1-60	N1-61	N1-62	N1-63	N1-64	N1-65
3/F	23.6	72	71	79	79	70	69	72	71	79	79	75	73	79	79	73	71	70	66	65	67	66	--	--	--	--	--	--	--	--	--	--	--	--
4/F	26.6	76	77	80	80	77	76	77	77	80	80	78	77	80	79	76	75	73	68	66	69	68	67	70	70	69	69	68	66	66	66	70	70	--
5/F	29.6	77	78	80	80	78	77	78	78	80	80	78	78	79	79	76	76	74	68	66	70	68	67	70	70	69	69	68	66	66	66	70	70	--
6/F	32.5	77	78	80	80	78	77	78	78	80	80	78	77	79	79	76	76	74	68	66	70	68	67	70	69	69	69	68	66	66	66	70	70	--
7/F	35.5	77	78	80	80	77	77	77	78	80	80	78	77	79	78	75	76	73	68	66	69	68	67	69	69	69	69	68	66	66	66	70	70	--
8/F	38.5	77	77	79	79	77	77	77	78	79	79	78	77	79	78	75	75	73	68	66	69	68	67	69	69	69	69	68	66	66	66	70	70	--
9/F	41.5	77	77	79	79	77	76	77	77	79	79	77	76	78	78	75	75	73	68	66	69	68	67	69	69	69	69	68	66	66	66	70	70	--
10/F	44.4	76	77	79	79	77	76	77	77	79	79	77	76	78	77	75	75	73	68	66	69	68	67	69	69	69	69	68	66	66	65	70	70	--
11/F	47.4	76	77	79	79	76	76	77	77	79	79	77	76	78	77	75	75	73	68	66	69	68	67	69	69	69	68	68	66	66	65	69	70	--
12/F	50.4	76	77	78	78	76	76	76	77	78	78	77	76	78	77	74	75	73	68	66	69	68	67	69	69	69	68	68	66	65	65	69	69	--
13/F	53.4	76	76	78	78	76	75	76	76	78	78	76	75	77	77	74	74	73	68	66	69	68	67	69	69	69	68	68	66	65	65	69	69	--
14/F	56.3	76	76	78	78	76	75	76	76	78	78	76	75	77	77	74	74	72	68	66	69	68	67	69	69	69	68	68	67	66	65	65	69	69
15/F	59.3	76	76	78	78	76	75	76	76	78	78	76	75	77	76	74	74	72	68	65	69	68	67	69	69	69	68	68	67	66	65	65	69	69
16/F	62.3	75	76	78	78	75	75	76	76	78	78	76	75	77	76	74	74	72	68	65	69	68	67	69	69	69	68	68	67	65	65	65	69	69
17/F	65.3	75	76	77	77	75	74	75	76	77	77	76	75	77	76	73	74	72	68	65	69	67	66	69	69	69	68	68	67	65	65	65	69	69
18/F	68.2	75	76	77	77	75	74	75	76	77	77	75	74	76	76	73	74	72	68	65	69	67	66	69	68	68	68	67	65	65	65	69	69	
19/F	71.2	75	75	77	77	75	74	75	75	77	77	75	74	76	76	73	73	72	68	65	69	67	66	69	68	68	68	67	65	65	65	69	69	
Max Noise Level	77	78	80	80	78	77	78	78	80	80	78	80	79	76	76	74	74	68	66	70	68	67	70	70	69	69	68	66	66	66	70	70	70	
Exceedance		17				17			17			17			17			0		0		0		0		0		0		0		0		

Total no. of Flats:	336
Total no. of Exceedance:	238
Compliance Level:	29%
Max. Noise Level:	81

Notes:

71	Noise level exceed standard of 70 dB(A)
--	Not Available at this residential storey

Predicted Road Traffic Noise (L10, dB(A)) at Selected Sensitive Receivers
Base Case (PM Peak Flow)

Tower 1																																	
Floor	mPD	N1-01	N1-02	N1-03	N1-04	N1-05	N1-06	N1-07	N1-08	N1-09	N1-10	N1-11	N1-12	N1-13	N1-14	N1-15	N1-16	N1-17	N1-18	N1-19	N1-20	N1-21	N1-22	N1-23	N1-24	N1-25	N1-26	N1-27	N1-28	N1-29	N1-30	N1-31	N1-32
3/F	23.6	69	68	69	69	75	77	75	76	77	77	76	79	71	69	72	72	78	78	69	69	71	71	78	78	69	68	71	71	78	78	69	68
4/F	26.6	69	69	69	69	75	77	77	77	77	78	79	80	76	75	76	76	80	80	76	75	76	76	80	80	75	75	76	76	80	80	75	75
5/F	29.6	69	69	69	69	75	77	77	77	77	78	79	80	78	77	77	78	80	80	77	77	77	77	80	80	77	76	77	77	80	80	77	76
6/F	32.5	69	69	69	69	75	77	77	77	77	78	78	79	78	77	77	78	79	79	77	77	77	78	79	79	77	76	77	77	79	79	77	76
7/F	35.5	69	69	69	69	75	77	76	77	77	78	78	79	77	76	77	78	79	79	77	76	77	77	79	79	77	76	77	77	79	79	77	76
8/F	38.5	69	69	69	69	75	77	76	76	77	78	79	79	77	76	77	78	79	79	77	76	77	77	79	79	76	76	77	77	79	79	77	76
9/F	41.5	69	69	69	69	75	76	76	76	77	78	79	79	77	76	77	77	79	79	76	76	77	77	79	79	76	76	77	77	79	79	76	75
10/F	44.4	69	68	69	69	75	76	76	76	77	77	78	77	77	76	76	77	78	78	76	76	76	77	78	78	76	75	76	76	78	78	76	75
11/F	47.4	69	68	68	69	74	76	76	76	76	77	78	77	77	75	76	77	78	78	76	75	76	77	78	78	76	75	76	76	78	78	76	75
12/F	50.4	69	68	68	69	74	76	76	76	76	77	78	76	75	76	76	78	78	76	75	76	76	78	78	75	75	76	76	78	78	76	75	
13/F	53.4	68	68	68	68	74	76	76	76	76	76	77	78	76	75	76	76	78	78	75	75	76	76	78	78	75	75	76	76	78	78	75	74
14/F	56.3	68	68	68	68	74	76	75	76	76	76	77	78	76	75	76	76	77	77	75	75	76	76	77	77	75	74	75	76	77	77	75	74
15/F	59.3	68	68	68	68	74	76	75	75	76	76	76	77	76	75	76	76	77	77	75	74	75	76	77	77	75	74	75	75	77	77	75	74
16/F	62.3	68	68	68	68	74	75	75	75	76	76	76	77	75	74	75	76	77	77	75	74	75	76	77	77	75	74	75	75	77	77	75	74
17/F	65.3	68	68	68	68	74	75	75	75	75	76	76	77	75	74	75	76	77	77	75	74	75	75	77	77	74	74	75	75	77	77	75	73
18/F	68.2	68	68	68	68	74	75	75	75	75	76	76	77	75	74	75	75	77	77	75	74	75	75	77	77	74	74	75	75	77	77	74	73
19/F	71.2	68	68	68	68	74	75	75	75	75	76	76	77	75	74	75	75	77	77	74	74	75	75	77	77	74	74	75	75	77	76	74	73
Max Noise Level	69	69	69	69	75	77	77	77	77	77	78	79	80	78	77	78	80	77	77	77	77	78	80	77	80	77	76	77	77	80	80	77	76
Exceedance		0				17					17		17			17			17			17		17		17			17			17	

Floor	mPD	N1-33	N1-34	N1-35	N1-36	N1-37	N1-38	N1-39	N1-40	N1-41	N1-42	N1-43	N1-44	N1-45	N1-46	N1-47	N1-48	N1-49	N1-50	N1-51	N1-52	N1-53	N1-54	N1-55	N1-56	N1-57	N1-58	N1-59	N1-60	N1-61	N1-62	N1-63	N1-64	N1-65
3/F	23.6	71	71	78	78	69	68	71	70	78	78	74	73	78	79	72	70	69	65	64	66	64	--	--	--	--	--	--	--	--	--	--	--	--
4/F	26.6	75	76	80	80	76	75	76	76	80	80	78	77	79	79	75	74	73	67	65	69	67	66	69	69	68	68	67	65	65	65	69	69	--
5/F	29.6	77	77	80	80	77	76	77	77	80	80	78	77	79	78	75	75	73	67	65	69	67	66	69	69	68	68	67	65	65	65	69	69	69
6/F	32.5	77	77	79	79	77	76	77	77	79	79	78	77	79	78	75	75	73	67	65	69	67	66	69	69	68	68	67	65	65	65	69	69	69
7/F	35.5	77	77	79	79	77	76	77	77	79	79	77	76	78	78	75	75	73	67	65	69	67	66	69	68	68	68	67	65	65	65	69	69	69
8/F	38.5	76	77	79	79	77	76	77	77	79	79	77	76	78	77	75	75	73	67	65	68	67	66	69	68	68	68	67	65	65	64	69	69	69
9/F	41.5	76	77	78	79	76	76	76	77	78	78	77	76	78	77	74	74	72	67	65	68	67	66	68	68	68	68	67	65	65	64	69	69	69
10/F	44.4	76	76	78	78	76	75	76	77	78	78	77	76	78	77	74	74	72	67	65	68	67	66	68	68	68	67	67	67	65	64	64	69	68
11/F	47.4	76	76	78	78	76	75	76	76	78	78	76	75	77	77	74	74	72	67	65	68	67	66	68	68	67	67	67	65	64	64	68	69	68
12/F	50.4	75	76	78	78	76	75	76	76	78	78	76	75	77	76	74	74	72	67	65	68	67	66	68	68	67	67	67	65	64	64	68	68	68
13/F	53.4	75	76	78	78	75	75	76	76	78	78	76	75	77	76	73	74	72	67	65	68	67	66	68	68	67	67	67	65	64	64	68	68	68
14/F	56.3	75	76	77	77	75	74	75	76	77	77	76	75	77	76	73	73	72	67	64	68	67	66	68	68	67	67	66	65	64	64	68	68	68
15/F	59.3	75	75	77	77	75	74	75	76	77	77	75	74	76	76	73	73	71	67	64	68	67	66	68	68	67	67	66	64	64	64	68	68	68
16/F	62.3	75	75	77	77	75	74	75	75	77	77	75	74	76	76	73	73	71	67	64	68	67	66	68	68	67	67	66	64	64	64	68	68	68
17/F	65.3	75	75	77	77	75	74	75	75	77	77	75	74	76	75	73	73	71	67	64	68	66	65	68	68	67	67	66	64	64	64	68	68	68
18/F	68.2	74	75	77	77	74	74	75	75	77	77	75	74	76	75	73	73	71	67	64	68	66	65	68	68	67	67	66	64	64	64	68	68	68
19/F	71.2	74	75	76	77	74	73	75	75	76	76	75	74	76	75	72	73	71	67	64	68	66	65	68	68	67	67	66	64	64	64	68	68	68
Max Noise Level	77	77	80	80	77	76	77	77	80	80	78	77	79	79	75	75	73	67	65	69	67	66	69	69	68	68	67	65	65	65	69	69	69	
Exceedance		17				17			17			17			17			0		0		0		0		0		0			0			0

Total no. of Flats:	336
Total no. of Exceedance:	238
Compliance Level:	29%
Max. Noise Level:	80


Notes:

71	Noise level exceed standard of 70 dB(A)
--	Not Available at this residential storey

Appendix 3.3

Proposed Acoustic Window (Baffle Type) and Enhanced Acoustic Balcony (Baffle Type)

(I) Possible design of “Acoustic Window (Baffle Type)” for 8m² and 18m² habitable rooms (i.e. dining room, living room or bedroom)

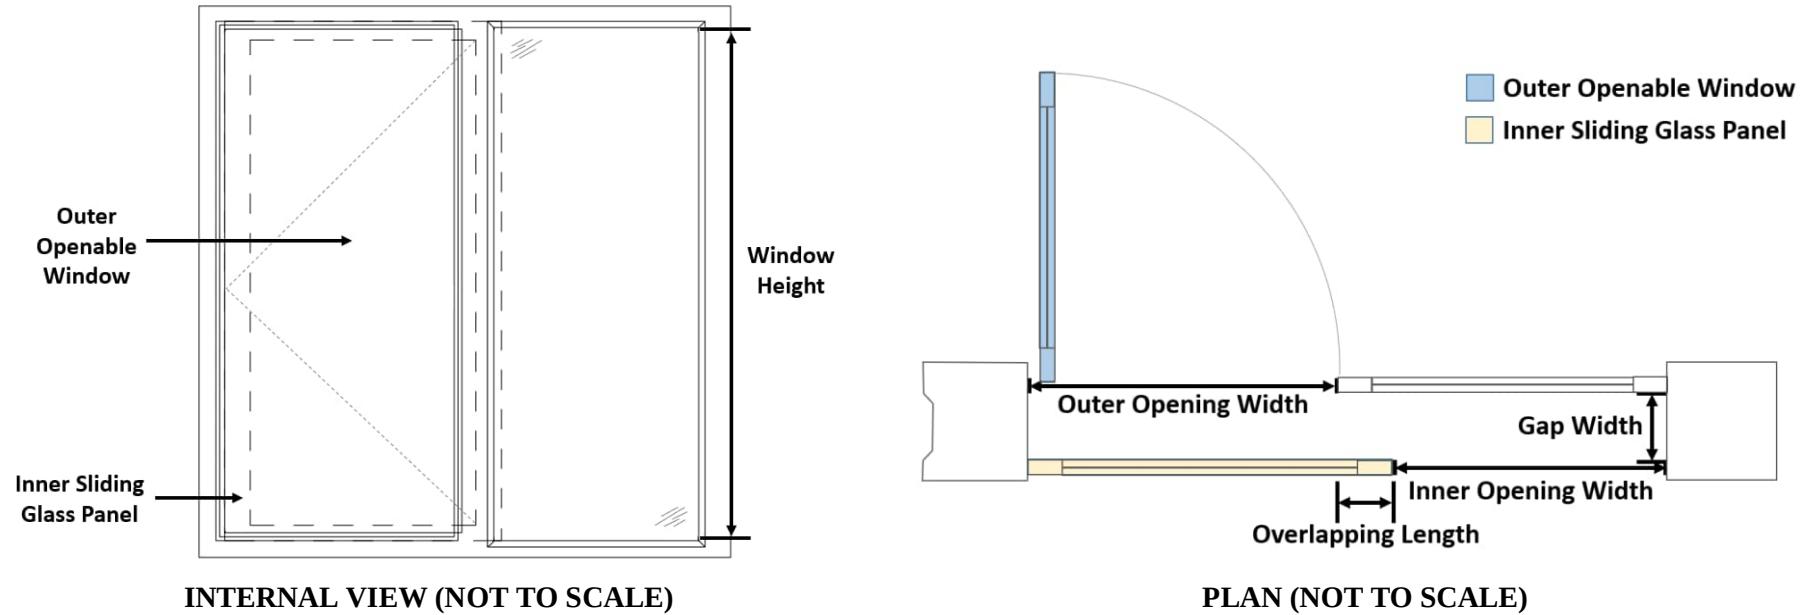

Possible Designs of “Acoustic Window (Baffle Type)” for 8m ² and 18m ² rooms					
Room Size (m ²)	Room Dimensions (mm ³)	Inner Window Opening (mm ²)	Outer Window Opening (mm ²)	Overlapping Length (mm)	Gap Width (mm)
8	3200 (W) x 2500 (D) x 3400 (H)	580 (W) x 870 (H)	600 (W) x 870 (H)	≥ 100	100 to 175
18	5300 (W) x 3390 (D) x 3400 (H)	750 (W) x 1500 (H)	750 (W) x 1500 (H)	≥ 100	100 to 175

Notes:

a. These are feasible designs of AW(BT) for 8m² and 18m² rooms.

b. For optimum performance of noise reduction, the air gap should have a pane-to-pane overlapping length of ≥ 100mm and a gap width between 100mm and 175mm, with the inner sliding glass panel in a closed position. The window pane shall be ≥ 6mm in thickness.







Table 1: Summary on RNR of Acoustic Window (Baffle Type) (for use in NIA) *Plan not to scale		Correction dB(A) L10(1hr)	
		8m ²	18m ²
	(a) Provision of AW(BT) parallel to dominant line source (whichever side the outer side-hung window is)	- 6.0	- 7.0
		- 7.5 (added SAM ¹)	- 8.5 (added SAM ¹)
	(b) Tilting the AW(BT) in (a) above to 30° - 60° horizontal incident angle to dominant line source (whichever side the outer side-hung window is)	- 7.0	- 8.0
		- 8.5 (added SAM ¹)	- 9.5 (added SAM ¹)
 D = Distance from architectural fin to nearest window frame should be at most 900mm.	(b1) If tilted AW(BT) is at 30° horizontal incident angle to dominant line source + 1.5m long full-height architectural fin² * AW(BT) + architectural fin should be considered as ONE package of noise mitigation measures. Outer side-hung window of AW(BT) and architectural fin should be installed at the side nearer to dominant line source.	- 8.0	- 9.0
		- 9.5 (added SAM ¹)	- 10.5 (added SAM ¹)

Table 1: Summary on RNR of Acoustic Window (Baffle Type) (for use in NIA) *Plan not to scale		Correction dB(A) L10(1hr)	
		8m ²	18m ²
 (b2) If tilted AW(BT) is at 60° horizontal incident angle to dominant line source + 1.5m long full-height architectural fin² * AW(BT) + architectural fin should be considered as ONE package of noise mitigation measures. Outer side-hung window of AW(BT) and architectural fin should be installed at the side nearer to dominant line source. D = Distance from architectural fin to nearest window frame should be at most 900mm.	- 9.0	- 10.0	
	- 10.5 (added SAM ¹)	- 11.5 (added SAM ¹)	
Note 1: The additional Sound Absorptive Material (SAM) shall be of Noise Reduction Coefficient ≥ 0.7 and applied at top and outer opening side of mullion. The material of SAM is subject to the requirements of section 3 of Building (Construction) Regulation.			
Note 2: The 1.5m long full-height architectural fin may be subject to the requirements for natural lighting and ventilation, gross floor area and site coverage under the B(P)R.			

(II) Possible designs of “Enhanced Acoustic Balcony (Baffle Type)” in 14m² and 18m² habitable rooms (i.e. dining room, living room or bedroom)



EXTERNAL VIEW (NOT TO SCALE)

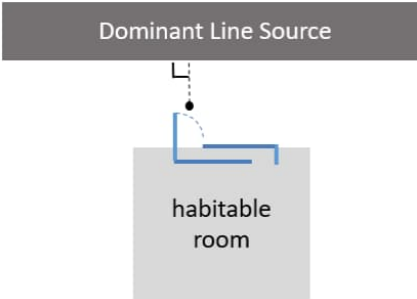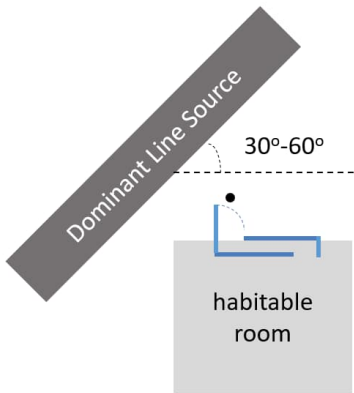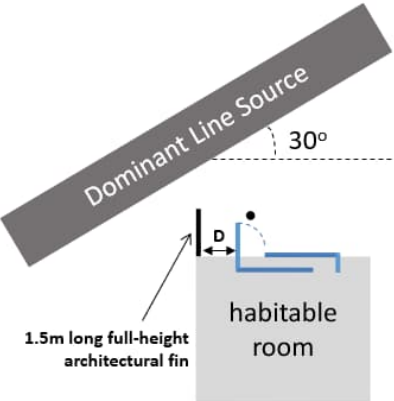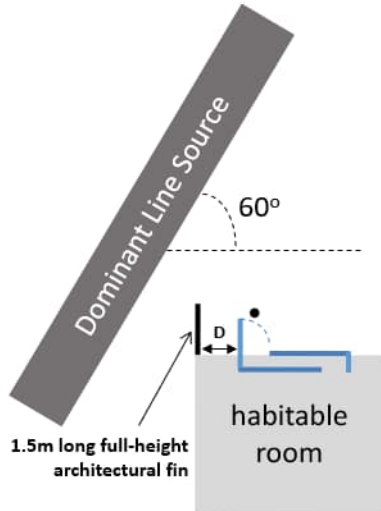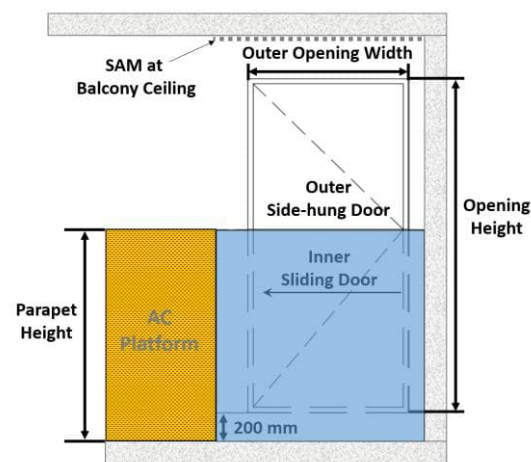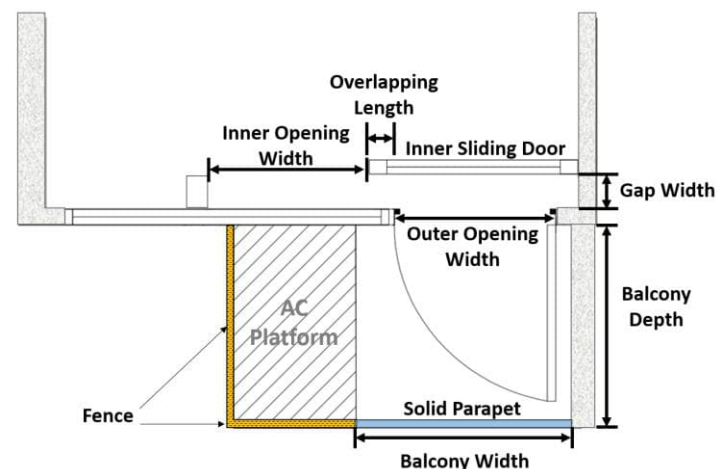

PLAN (NOT TO SCALE)



 Fence (≥ 70% Permeability)

 Solid Parapet

Possible Designs of “Enhanced Acoustic Balcony (Baffle Type)” for 14m ² and 18m ² rooms								
Room size (m ²)	Room Dimensions (mm ³)	Balcony Width (mm)	Balcony Depth (mm)	Parapet Height (mm)	Inner Opening (mm ²)	Outer Opening (mm ²)	Overlapping Length (mm)	Gap Width (mm)
14	3400 (W) x 4100 (D) x 3100 (H)	≥ 1440	≥ 1300	≥ 1450	1025 (W) x 2210 (H)	1150 (W) x 2210 (H)	≥ 100	100
18	5300 (W) x 3390 (D) x 3400 (H)	≥ 2055	≥ 1300	≥ 1450	1150 (W) x 2210 (H)	1150 (W) x 2210 (H)	≥ 100	100

Notes:

- These are feasible designs of EAB for 14m² and 18m² rooms. The room with EAB should meet the natural lighting and ventilation requirements in regulations 30 & 31 of the Building (Planning) Regulations (B(P)R). The AC platform should comply with the requirements under Appendix B of Code of Practice on Access for External Maintenance 2021 (AfEM Code), and balconies for residential buildings should comply with the criteria and conditions set out in Joint Practice Note (JPN) 1 for application of exemption from gross floor area and/or site coverage under the B(P)R.
- SAM at balcony ceiling refers to sound absorptive material of noise reduction coefficient ≥ 0.7. It is an essential feature to attain the basic noise reduction performance in Annex B.
- Comparable noise performance is anticipated should the AC platform be replaced by balcony with solid parapet.

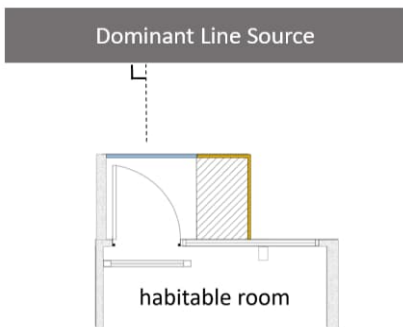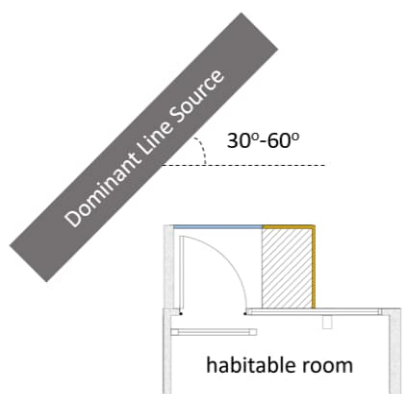Table 2: Summary on RNR of Enhanced Acoustic Balcony (Baffle Type) (for use in NIA) *Plan not to scale		Correction dB(A) L10(1hr)	
		14m ²	18m ²
	(a) Provision of EAB(BT) parallel to dominant line source	- 8.0	- 9.0
		- 9.5 (added SAM ¹)	- 10.5 (added SAM ¹)
	(b) Tilting the EAB(BT) in (a) above to 30° - 60° horizontal incident angle to dominant line source	- 11.0	- 11.0
		- 12.5 (added SAM ¹)	- 12.5 (added SAM ¹)
Note 1: The additional Sound Absorptive Material (SAM) shall be of Noise Reduction Coefficient ≥ 0.7 and applied at top and outer opening side of the mullion. The material of SAM is subject to the requirements of section 3 of Building (Construction) Regulation.			

ⁱ Should there be any variation on the proposed INMD, or practitioners and professionals consider that a higher RNR value should be adopted, justifications together with technical documents, e.g. corrections based on acoustic principles, laboratory testing reports, in-situ measurement reports, etc. should be submitted to the EPD for consideration. For requirements of laboratory measurement or in-situ measurement requirements, practitioners and professionals may contact the EPD for further details. As RNR varies with room size, practitioners and professionals may like to propose the preferred RNR to the EPD for consideration if different room size is encountered in the NIA study. Having said that, information indicates that for **Tables 1 and 2**:

- Variations of room size within +/- 10% would not affect the RNR;
- Variations of floor-to-ceiling height within +/- 5% would not affect the RNR; and
- Variations of window / door opening size within +/- 5% would not affect the RNR.

Appendix 3.4

Referenced Configurations of Acoustic Window (Baffle Type) and Enhanced Acoustic Balcony (Baffle Type)

Road Traffic Noise Impact Assessment

Acoustic Window (Baffle Type) and Enhanced Acoustic Balcony (Baffle Type)

Summary Table of Major Parameters of Reference Case and Maximum Sound Attenuation Available

Name	Outer opening width, mm	Outer opening height, mm	Outer opening area, m ²	Air gap, mm	Overlapping length, mm	MPA Applied	Solid Parapet Applied	Acoustic Ceiling Applied	Room Area, m ²	Maximum Noise Reduction Available, dB(A)
Acoustic Window (Baffle Type)										
AW1-PN	600	870	0.5	100	100	No	-	-	8.0	6.0
AW2-PN	750	1500	1.1	100	100	No	-	-	18.0	7.0
Enhanced Acoustic Balcony (Baffle Type)										
EAB1-PN	1150	2210	2.5	100	100	No	Yes	Yes	14.0	8.0
EAB2-PN	1150	2210	2.5	100	100	No	Yes	Yes	18.0	9.0

Note:

MPA: Micro Perforated Absorber

Solid Parapet: Minimum 1440mm (W), 1450mm (H) parallel to door opening

SAM: Sound Absorptive Material

Acoustic Ceiling: Balcony ceiling to be covered by SAM

Road Traffic Noise Impact Assessment

Acoustic Window (Baffle Type) and Enhanced Acoustic Balcony (Baffle Type)

Table of Major Parameters, Room Size and Sound Attenuation Adjustment of "Proposed Case for Proposed Development" and "Corresponding Reference Case"

Tower	Unit	Room	Opening	NSRs	Case	Proposed Development								Reference Case								Room Size Adjustment: 10xlog(RA / RAref) (adjust downward only), dB(A)	Adjusted sound attenuation, dB(A)	Incident angle, deg	Window / Door: Extra sound attenuation from incident angle, dB(A)	Window / Door: Extra sound attenuation with SAM, dB(A)	Window: 1.5m Fin	Window: Extra sound attenuation with 1.5m Fin, dB(A)	Maximum possible sound attenuation, dB(A)
						Outer opening area, m ²	Air gap, mm	Overlapping length, mm	MPA applied?	SAM and Pelmet applied	Solid Parapet Applied	Acoustic Ceiling applied	Room area (RA), m ²	Outer opening width, mm	Outer opening height, mm	Outer opening area, m ²	Air gap, mm	Overlapping length, mm	MPA applied?	Room area (RAref), m ²	Ref. sound attenuation, dB(A)								
1	A2	MBR	W	N1-06	AW1-PN	0.5	100	100	No	Yes	-	-	7.40	600	870	0.5	100	100	No	8.00	6.0	-1.8	4.2	90	1.0	1.5	No	0	6.7
1	A3	MBR	W	N1-09	AW1-PN	0.5	100	100	No	Yes	-	-	6.70	600	870	0.5	100	100	No	8.00	6.0	-0.8	5.2	90	1.0	1.5	No	0	7.7
1	A3	LIV	D	N1-10	EAB2-PN	2.5	100	100	No	No	Yes	Yes	17.30	1150	2210	2.5	100	100	No	18.00	9.0	-0.2	8.8	90	2.0	0	No	0	10.8
1	A3	BR	W	N1-11	AW1-PN	0.5	100	100	No	Yes	-	-	5.20	600	870	0.5	100	100	No	8.00	6.0	-1.9	4.1	90	1.0	1.5	Yes	2.0	8.6
1	A4	LIV	W	N1-13	AW2-PN	1.1	100	100	No	Yes	-	-	13.30	750	1500	1.1	100	100	No	18.00	7.0	-1.3	5.7	90	1.0	1.5	No	0	8.2
1	A4	BR	W	N1-14	AW1-PN	0.5	100	100	No	No	-	-	7.70	600	870	0.5	100	100	No	8.00	6.0	-0.2	5.8	0	0	0	No	0	5.8
1	A5	BR	W	N1-15	AW1-PN	0.5	100	100	No	Yes	-	-	7.70	600	870	0.5	100	100	No	8.00	6.0	-0.2	5.8	0	0	1.5	No	0	7.3
1	A5	LIV	W	N1-16	AW2-PN	1.1	100	100	No	Yes	-	-	12.90	750	1500	1.1	100	100	No	18.00	7.0	-1.4	5.6	90	1.0	1.5	No	0	8.1
1	A6	LIV	W	N1-19	AW2-PN	1.1	100	100	No	Yes	-	-	12.90	750	1500	1.1	100	100	No	18.00	7.0	-1.4	5.6	90	1.0	1.5	No	0	8.1
1	A6	BR	W	N1-20	AW1-PN	0.5	100	100	No	Yes	-	-	7.70	600	870	0.5	100	100	No	8.00	6.0	-0.2	5.8	0	0	1.5	No	0	7.3
1	A7	BR	W	N1-21	AW1-PN	0.5	100	100	No	Yes	-	-	7.70	600	870	0.5	100	100	No	8.00	6.0	-0.2	5.8	0	0	1.5	No	0	7.3
1	A7	LIV	W	N1-22	AW2-PN	1.1	100	100	No	Yes	-	-	12.90	750	1500	1.1	100	100	No	18.00	7.0	-1.4	5.6	90	1.0	1.5	No	0	8.1
1	A8	LIV	W	N1-25	AW2-PN	1.1	100	100	No	Yes	-	-	12.90	750	1500	1.1	100	100	No	18.00	7.0	-1.4	5.6	90	1.0	1.5	No	0	8.1
1	A8	BR	W	N1-26	AW1-PN	0.5	100	100	No	Yes	-	-	7.70	600	870	0.5	100	100	No	8.00	6.0	-0.2	5.8	0	0	1.5	No	0	7.3
1	B8	BR	W	N1-27	AW1-PN	0.5	100	100	No	Yes	-	-	7.70	600	870	0.5	100	100	No	8.00	6.0	-0.2	5.8	0	0	1.5	No	0	7.3
1	B8	LIV	W	N1-28	AW2-PN	1.1	100	100	No	Yes	-	-	12.90	750	1500	1.1	100	100	No	18.00	7.0	-1.4	5.6	90	1.0	1.5	No	0	8.1
1	B7	LIV	W	N1-31	AW2-PN	1.1	100	100	No	Yes	-	-	12.90	750	1500	1.1	100	100	No	18.00	7.0	-1.4	5.6	90	1.0	1.5	No	0	8.1
1	B7	BR	W	N1-32	AW1-PN	0.5	100	100	No	Yes	-	-	7.70	600	870	0.5	100	100	No	8.00	6.0	-0.2	5.8	0	0	1.5	No	0	7.3
1	B6	BR	W	N1-33	AW1-PN	0.5	100	100	No	Yes	-	-	7.70	600	870	0.5	100	100	No	8.00	6.0	-0.2	5.8	0	0	1.5	No	0	7.3
1	B6	LIV	W	N1-34	AW2-PN	1.1	100	100	No	Yes	-	-	12.90	750	1500	1.1	100	100	No	18.00	7.0	-1.4	5.6	90	1.0	1.5	No	0	8.1
1	B5	LIV	W	N1-37	AW2-PN	1.1	100	100	No	Yes	-	-	12.90	750	1500	1.1	100	100	No	18.00	7.0	-1.4	5.6	90	1.0	1.5	No	0	8.1
1	B5	BR	W	N1-38	AW1-PN	0.5	100	100	No	Yes	-	-	7.70	600	870	0.5	100	100	No	8.00	6.0	-0.2	5.8	0	0	1.5	No	0	7.3
1	B4	BR	W	N1-39	AW1-PN	0.5	100	100	No	Yes	-	-	7.70	600	870	0.5	100	100	No	8.00	6.0	-0.2	5.8	0	0	1.5	No	0	7.3
1	B4	LIV	W	N1-40	AW2-PN	1.1	100	100	No	Yes	-	-	13.00	750	1500	1.1	100	100	No	18.00	7.0	-1.4	5.6	90	1.0	1.5	No	0	8.1
1	B3	LIV	D	N1-42	EAB2-PN	2.5	100	100	No	Yes	Yes	Yes	18.20	1150	2210	2.5	100	100	No	18.00	9.0	0.0	9.0	0	0	1.5	No	0	10.5
1	B3	BR	W	N1-44	AW1-PN	0.5	100	100	No	Yes	-	-	5.20	600	870	0.5	100	100	No	8.00	6.0	-1.9	4.1	0	0	1.5	No	0	5.6
1	B3	MBR	W	N1-46	AW1-PN	0.5	100	100	No	Yes	-	-	7.60	600	870	0.5	100	100	No	8.00	6.0	-0.2	5.8	90	1.0	1.5	Yes	2.0	10.3
1	B2	LIV	D	N1-47	EAB1-PN	2.5	100	100	No	No	Yes	Yes	13.20	1150	2210	2.5	100	100	No	14.00	8.0	-0.3	7.7	90	3.0	0	No	0	10.7
1	B2	BR	W	N1-49	AW1-PN	0.5	100	100	No	No	-	-	5.70	600	870	0.5	100	100	No	8.00	6.0	-1.5	4.5	90	1.0	0	No	0	5.5

Appendix 3.5

Predicted Road Traffic Noise Impact Assessment Results (Mitigated Case Scenario)

Predicted Road Traffic Noise (L10, dB(A)) at Selected Sensitive Receivers
Mitigated (Solid Wall) (AM Peak Flow - Worst Case)

Tower 1

Floor	mPD	N1-01	N1-02	N1-03	N1-04	N1-05	N1-06	N1-07	N1-08	N1-09	N1-10	N1-11	N1-12	N1-13	N1-14	N1-15	N1-16	N1-17	N1-18	N1-19	N1-20	N1-21	N1-22	N1-23	N1-24	N1-25	N1-26	N1-27	N1-28	N1-29	N1-30	N1-31	N1-32
3/F	23.6	70	70	70	70	75	78	66	66	66	67	68	69	65	64	66	66	69	69	64	64	65	66	68	68	64	63	65	65	68	68	64	63
4/F	26.6	70	70	70	70	76	77	77	77	77	78	79	80	76	74	76	76	80	80	74	74	75	76	80	80	74	74	75	75	80	80	74	74
5/F	29.6	70	70	70	70	76	77	77	77	78	78	79	80	78	77	78	78	80	80	77	77	77	78	80	80	77	76	77	77	80	80	77	76
6/F	32.5	70	70	70	70	76	77	77	77	78	78	79	80	78	77	78	78	80	80	78	77	78	78	80	80	77	77	78	78	80	80	77	76
7/F	35.5	70	70	70	70	75	77	77	77	78	78	79	80	78	77	78	78	80	80	77	77	78	78	80	80	77	77	77	78	80	80	77	76
8/F	38.5	70	70	70	70	75	77	77	77	77	78	78	79	78	77	78	78	79	79	77	77	77	78	79	79	77	76	77	77	79	79	77	76
9/F	41.5	70	70	70	70	75	77	77	77	77	78	78	79	78	77	77	78	79	79	77	77	77	78	79	79	77	76	77	77	79	79	77	76
10/F	44.4	70	69	70	70	75	77	77	77	77	78	78	79	77	76	77	78	79	79	77	76	77	77	79	79	77	76	77	77	79	79	77	76
11/F	47.4	70	69	69	70	75	77	76	77	77	77	78	79	77	76	77	77	79	79	77	76	77	77	79	79	76	76	77	77	79	79	76	75
12/F	50.4	69	69	69	70	75	77	76	76	77	77	78	79	77	76	77	77	78	78	76	76	77	77	78	78	76	75	76	77	78	78	76	75
13/F	53.4	69	69	69	69	75	76	76	76	77	77	77	78	77	76	77	77	78	78	76	76	76	77	78	78	76	75	76	76	78	78	76	75
14/F	56.3	69	69	69	69	75	76	76	76	76	77	77	78	77	75	76	77	78	78	76	75	76	77	78	78	76	75	76	76	78	78	76	75
15/F	59.3	69	69	69	69	74	76	76	76	76	77	77	78	76	75	76	77	78	78	76	75	76	76	78	78	75	75	76	76	78	78	76	74
16/F	62.3	69	69	69	69	74	76	76	76	76	77	77	78	76	75	76	76	78	78	76	75	76	76	78	78	75	75	76	76	78	78	75	74
17/F	65.3	69	69	69	69	74	76	76	76	76	76	77	78	76	75	76	76	78	78	75	75	76	76	77	77	75	74	76	76	77	77	75	74
18/F	68.2	69	69	69	69	74	76	75	76	76	76	77	77	76	75	76	76	77	77	75	75	76	76	77	77	75	74	75	76	77	77	75	74
19/F	71.2	69	69	69	69	74	76	75	76	76	76	77	77	76	75	76	76	77	77	75	75	75	76	77	77	75	74	75	75	77	77	75	74
Max Noise Level	70	70	70	70	76	78	77	77	77	78	78	79	80	78	77	78	78	80	78	78	77	78	78	80	80	77	77	78	78	80	80	77	76
Exceedance		0				17					16		16			16		16		16		16		16		16		16				16	

Floor	mPD	N1-33	N1-34	N1-35	N1-36	N1-37	N1-38	N1-39	N1-40	N1-41	N1-42	N1-43	N1-44	N1-45	N1-46	N1-47	N1-48	N1-49	N1-50	N1-51	N1-52	N1-53	N1-54	N1-55	N1-56	N1-57	N1-58	N1-59	N1-60	N1-61	N1-62	N1-63	N1-64	N1-65
3/F	23.6	65	65	68	68	64	63	65	65	68	68	66	64	68	79	65	67	67	66	65	66	66	--	--	--	--	--	--	--	--	--	--	--	--
4/F	26.6	75	75	80	80	74	74	75	75	80	80	77	76	79	79	76	74	72	68	66	69	68	67	69	69	69	69	68	66	66	66	70	70	--
5/F	29.6	77	77	80	80	77	76	77	77	80	80	78	77	79	79	76	76	74	68	66	70	68	67	70	70	69	69	68	66	66	66	70	70	70
6/F	32.5	77	78	80	80	77	77	77	77	80	80	78	77	79	79	76	76	74	68	66	70	68	67	70	69	69	69	68	66	66	66	70	70	70
7/F	35.5	77	78	80	80	77	77	77	77	80	80	78	77	79	78	75	76	73	68	66	69	68	67	69	69	69	69	68	66	66	66	70	70	70
8/F	38.5	77	77	79	79	77	77	77	77	78	79	78	77	79	78	75	75	73	68	66	69	68	67	69	69	69	69	68	66	66	66	70	70	70
9/F	41.5	77	77	79	79	77	76	77	77	79	79	77	76	78	78	75	75	73	68	66	69	68	67	69	69	69	69	68	66	66	66	70	70	70
10/F	44.4	76	77	79	79	77	76	77	77	79	79	77	76	78	77	75	75	73	68	66	69	68	67	69	69	69	69	68	66	66	65	70	70	69
11/F	47.4	76	77	79	79	76	76	77	77	79	79	77	76	78	77	75	75	73	68	66	69	68	67	69	69	69	68	68	66	66	65	69	70	69
12/F	50.4	76	77	78	78	76	76	76	76	77	78	78	77	76	78	77	74	75	73	68	66	69	68	67	69	69	69	68	68	66	65	65	69	69
13/F	53.4	76	76	78	78	76	75	76	76	78	78	76	75	77	77	74	74	73	68	66	69	68	67	69	69	69	68	68	66	65	65	69	69	69
14/F	56.3	76	76	78	78	76	75	76	76	78	78	76	75	77	77	74	74	72	68	66	69	68	67	69	69	69	68	68	67	66	65	65	69	69
15/F	59.3	76	76	78	78	76	75	76	76	78	78	76	75	77	76	74	74	72	68	65	69	68	67	69	69	69	68	68	67	66	65	65	69	69
16/F	62.3	75	76	78	78	75	75	76	76	78	78	76	75	77	76	74	74	72	68	65	69	68	67	69	69	69	68	68	67	65	65	65	69	69
17/F	65.3	75	76	77	77	75	74	75	76	77	77	76	75	77	76	73	74	72	68	65	69	67	66	69	69	69	68	68	67	65	65	65	69	69
18/F	68.2	75	76	77	77	75	74	75	76	77	77	75	74	76	76	73	74	72	68	65	69	67	66	69	69	68	68	67	65	65	65	69	69	
19/F	71.2	75	75	77	77	75	74	75	75	77	77	75	74	76	76	73	73	72	68	65	69	67	66	69	69	68	68	67	65	65	65	69	69	
Max Noise Level	77	78	80	80	77	77	77	77	78	80	80	78	77	79	79	76	76	74	68	66	70	68	67	70	69	69	68	68	67	66	66	70	70	70
Exceedance		16				16				16		17		16		16		0		0		0		0		0		0				0		

Total no. of Flats:	336
Total no. of Exceedance:	226
Compliance Level:	33%
Max. Noise Level:	80

Notes:

71	Noise level exceed standard of 70 dB(A)
--	Not Available at this residential storey

Predicted Road Traffic Noise (L10, dB(A)) at Selected Sensitive Receivers
Mitigated (Solid Wall) (PM Peak Flow)

Tower 1

Floor	mPD	N1-01	N1-02	N1-03	N1-04	N1-05	N1-06	N1-07	N1-08	N1-09	N1-10	N1-11	N1-12	N1-13	N1-14	N1-15	N1-16	N1-17	N1-18	N1-19	N1-20	N1-21	N1-22	N1-23	N1-24	N1-25	N1-26	N1-27	N1-28	N1-29	N1-30	N1-31	N1-32
3/F	23.6	69	68	69	69	75	77	66	66	66	66	67	68	65	63	65	65	68	68	64	63	65	65	68	68	63	63	65	65	68	68	64	62
4/F	26.6	69	69	69	69	75	77	76	77	77	77	78	80	74	73	75	75	79	79	73	73	74	74	79	79	73	73	74	74	79	79	73	72
5/F	29.6	69	69	69	69	75	77	77	77	77	77	78	80	77	76	77	77	80	80	76	76	76	77	79	80	76	75	76	76	80	80	76	75
6/F	32.5	69	69	69	69	75	77	76	77	77	78	78	79	77	76	77	77	79	79	77	76	77	77	79	79	77	76	77	77	79	79	77	76
7/F	35.5	69	69	69	69	75	77	76	77	77	78	78	79	77	76	77	77	79	79	77	76	77	77	79	79	77	76	77	77	79	79	77	76
8/F	38.5	69	69	69	69	75	77	76	76	77	77	78	79	77	76	77	77	79	79	77	76	77	77	79	79	76	76	77	77	79	79	76	75
9/F	41.5	69	69	69	69	75	76	76	77	77	78	79	77	76	77	77	79	79	76	76	76	77	79	79	76	76	76	77	77	79	79	76	75
10/F	44.4	69	68	69	69	75	76	76	76	77	77	78	77	76	76	77	78	78	76	76	76	77	78	78	76	75	76	76	78	78	76	75	
11/F	47.4	69	68	68	69	74	76	76	76	76	77	77	78	77	75	76	77	78	78	76	75	76	77	78	78	76	75	76	76	78	78	76	75
12/F	50.4	69	68	68	69	74	76	76	76	76	77	77	78	76	75	76	76	78	78	76	75	76	76	78	78	75	75	76	76	78	78	76	75
13/F	53.4	68	68	68	68	74	76	76	76	76	76	77	78	76	75	76	76	78	78	75	75	76	76	78	78	75	75	76	76	78	78	75	74
14/F	56.3	68	68	68	68	74	76	75	76	76	76	77	78	76	75	76	76	77	77	75	75	76	77	77	77	75	74	75	76	77	77	75	74
15/F	59.3	68	68	68	68	74	76	75	75	76	76	77	76	75	76	76	77	77	77	75	74	75	76	77	77	75	74	75	75	77	77	75	74
16/F	62.3	68	68	68	68	74	75	75	75	76	76	76	77	75	74	75	76	77	77	75	74	75	76	77	77	75	74	75	75	77	77	75	74
17/F	65.3	68	68	68	68	74	75	75	75	75	76	76	77	75	74	75	76	77	77	75	74	75	75	77	77	74	74	75	75	77	77	75	73
18/F	68.2	68	68	68	68	74	75	75	75	75	76	76	77	75	74	75	75	77	77	75	74	75	75	77	77	74	74	75	75	77	77	74	73
19/F	71.2	68	68	68	68	74	75	75	75	75	76	76	77	75	74	75	75	77	77	74	74	75	75	77	77	74	74	75	75	77	76	74	73
Max Noise Level	69	69	69	69	75	77	77	77	77	78	80	78	80	77	76	77	80	80	77	76	77	77	79	80	77	76	77	77	80	80	77	76	
Exceedance		0				17					16		16			16		16		16		16		16		16		16		16		16	

Floor	mPD	N1-33	N1-34	N1-35	N1-36	N1-37	N1-38	N1-39	N1-40	N1-41	N1-42	N1-43	N1-44	N1-45	N1-46	N1-47	N1-48	N1-49	N1-50	N1-51	N1-52	N1-53	N1-54	N1-55	N1-56	N1-57	N1-58	N1-59	N1-60	N1-61	N1-62	N1-63	N1-64	N1-65
3/F	23.6	64	64	68	68	64	63	65	64	68	68	65	64	67	79	64	66	66	65	64	65	64	--	--	--	--	--	--	--	--	--	--	--	--
4/F	26.6	74	74	79	79	73	73	74	74	79	79	76	75	79	79	75	73	71	67	65	68	67	66	68	68	68	68	67	65	65	65	69	69	--
5/F	29.6	76	76	80	80	76	76	76	76	80	80	78	77	79	78	75	75	73	67	65	69	67	66	69	69	68	68	67	65	65	65	69	69	69
6/F	32.5	76	77	79	79	77	76	77	77	79	79	77	77	79	78	75	75	73	67	65	69	67	66	69	69	68	68	67	65	65	65	69	69	69
7/F	35.5	76	77	79	79	77	76	77	77	79	79	77	76	78	78	75	75	73	67	65	69	67	66	69	68	68	68	67	65	65	65	69	69	69
8/F	38.5	76	77	79	79	77	76	77	77	79	79	77	76	78	77	75	75	73	67	65	68	67	66	69	68	68	68	67	65	65	64	69	69	69
9/F	41.5	76	77	78	79	76	76	76	77	78	78	77	76	78	77	74	74	72	67	65	68	67	66	68	68	68	68	67	65	65	64	69	69	69
10/F	44.4	76	76	78	78	76	75	76	76	78	78	77	76	78	77	74	74	72	67	65	68	67	66	68	68	68	67	67	67	65	64	64	69	69
11/F	47.4	76	76	78	78	76	75	76	76	78	78	76	75	77	77	74	74	72	67	65	68	67	66	68	68	68	67	67	67	65	64	64	68	69
12/F	50.4	75	76	78	78	76	75	76	76	78	78	76	75	77	76	74	74	72	67	65	68	67	66	68	68	68	67	67	67	65	64	64	68	68
13/F	53.4	75	76	78	78	75	75	76	76	78	78	76	75	77	76	73	74	72	67	65	68	67	66	68	68	68	67	67	67	65	64	64	68	68
14/F	56.3	75	76	77	77	75	74	75	76	77	77	76	75	77	76	73	73	72	67	64	68	67	66	68	68	68	67	67	66	65	64	64	68	68
15/F	59.3	75	75	77	77	75	74	75	76	77	77	75	74	76	76	73	73	71	67	64	68	67	66	68	68	68	67	67	66	64	64	64	68	68
16/F	62.3	75	75	77	77	75	74	75	75	77	77	75	74	76	76	73	73	71	67	64	68	67	66	68	68	68	67	67	66	64	64	64	68	68
17/F	65.3	75	75	77	77	75	74	75	75	77	77	75	74	76	75	73	73	71	67	64	68	66	65	68	68	68	67	67	66	64	64	64	68	68
18/F	68.2	74	75	77	77	74	74	75	75	77	77	75	74	76	75	73	73	71	67	64	68	66	65	68	68	68	67	67	66	64	64	64	68	68
19/F	71.2	74	75	76	77	74	73	75	75	76	76	75	74	76	75	72	73	71	67	64	68	66	65	68	68	68	67	67	66	64	64	64	68	68
Max Noise Level	76	77	80	80	77	76	77	77	80	80	80	78	77	79	79	75	75	73	67	65	69	67	66	69	69	68	68	67	65	65	65	69	69	69
Exceedance		16				16			16			17				16			0		0		0		0		0		0		0		0	

Total no. of Flats:	336
Total no. of Exceedance:	226
Compliance Level:	33%
Max. Noise Level:	80

Notes:
71 Noise level exceed standard of 70 dB(A)
-- Not Available at this residential storey

Predicted Road Traffic Noise (L10, dB(A)) at Selected Sensitive Receivers
Mitigated (Acoustic Fin, Solid Wall) (AM Peak Flow - Worst Case)

Tower 1																																		
Floor	mPD	N1-01	N1-02	N1-03	N1-04	N1-05	N1-06	N1-07	N1-08	N1-09	N1-10	N1-11	N1-12	N1-13	N1-14	N1-15	N1-16	N1-17	N1-18	N1-19	N1-20	N1-21	N1-22	N1-23	N1-24	N1-25	N1-26	N1-27	N1-28	N1-29	N1-30	N1-31	N1-32	
3/F	23.6	70	70	70	70	75	78	66	66	66	67	68	69	65	63	66	66	69	69	64	64	65	66	68	68	64	63	65	65	68	68	64	63	
4/F	26.6	70	70	70	70	76	77	77	77	77	78	79	80	75	73	76	76	80	80	74	74	75	76	80	80	74	74	75	75	80	80	74	74	
5/F	29.6	70	70	70	70	76	77	77	77	77	78	78	79	80	77	76	78	78	80	80	77	77	77	78	80	80	77	76	77	77	80	80	77	76
6/F	32.5	70	70	70	70	76	77	77	77	77	78	78	79	80	78	76	78	78	80	80	78	77	78	78	80	80	77	77	78	78	80	80	77	76
7/F	35.5	70	70	70	70	75	77	77	77	77	78	78	79	80	78	76	78	78	80	80	77	77	78	78	80	80	77	77	77	78	80	80	77	76
8/F	38.5	70	70	70	70	75	77	77	77	77	78	78	79	77	76	77	78	79	79	77	77	77	78	79	79	77	76	77	77	79	79	77	76	
9/F	41.5	70	70	70	70	75	77	77	77	77	78	78	79	77	76	77	78	79	79	77	77	77	78	79	79	77	76	77	77	79	79	77	76	
10/F	44.4	70	69	70	70	75	77	77	77	77	78	78	79	77	75	77	77	79	79	77	76	77	77	79	79	77	76	77	77	79	79	77	76	
11/F	47.4	70	69	69	70	75	77	76	77	77	77	78	79	77	75	77	77	79	79	77	76	77	77	79	79	76	76	77	77	79	79	76	75	
12/F	50.4	69	69	69	70	75	77	76	76	77	77	78	79	77	75	77	77	78	78	76	76	77	77	78	78	76	75	76	77	78	78	76	75	
13/F	53.4	69	69	69	69	75	76	76	76	77	77	77	78	76	75	76	77	78	78	76	76	76	77	78	78	76	75	76	76	78	78	76	75	
14/F	56.3	69	69	69	69	75	76	76	76	76	77	77	78	76	74	76	77	78	78	76	75	76	77	78	78	76	75	76	76	78	78	76	75	
15/F	59.3	69	69	69	69	74	76	76	76	76	77	77	78	76	74	76	76	78	78	76	75	76	76	78	78	75	75	76	76	78	78	76	74	
16/F	62.3	69	69	69	69	74	76	76	76	76	77	77	78	76	74	76	76	78	78	76	75	76	76	78	78	75	75	76	76	78	78	75	74	
17/F	65.3	69	69	69	69	74	76	76	76	76	77	77	78	76	74	76	76	78	78	75	75	76	76	77	77	75	74	76	76	77	77	75	74	
18/F	68.2	69	69	69	69	74	76	75	76	76	77	77	77	75	74	76	76	77	77	75	75	76	76	77	77	75	74	75	76	77	77	75	74	
19/F	71.2	69	69	69	69	74	76	75	76	76	77	77	77	75	74	76	76	77	77	75	75	75	76	77	77	75	74	75	75	77	77	75	74	
Max Noise Level	70	70	70	70	76	78	77	77	77	78	78	79	80	78	76	78	78	80	80	78	77	78	78	80	80	77	77	78	78	80	80	77.3	76	
Exceedance		0				17					16			16			16			16			16			16			16			16		

Floor	mPD	N1-33	N1-34	N1-35	N1-36	N1-37	N1-38	N1-39	N1-40	N1-41	N1-42	N1-43	N1-44	N1-45	N1-46	N1-47	N1-48	N1-49	N1-50	N1-51	N1-52	N1-53	N1-54	N1-55	N1-56	N1-57	N1-58	N1-59	N1-60	N1-61	N1-62	N1-63	N1-64	N1-65
3/F	23.6	65	65	68	68	64	63	65	65	68	68	65	63	67	79	65	67	67	66	65	66	66	--	--	--	--	--	--	--	--	--	--	--	--
4/F	26.6	75	75	80	80	74	74	75	75	80	80	77	75	79	79	75	74	72	68	66	69	68	67	69	69	69	69	68	66	66	66	70	70	70
5/F	29.6	77	77	80	80	77	76	77	77	80	80	77	76	79	79	75	75	74	68	66	70	68	67	70	70	69	69	68	66	66	66	70	70	70
6/F	32.5	77	78	80	80	77	77	77	77	80	80	77	76	79	79	75	75	74	68	66	70	68	67	70	69	69	69	68	66	66	66	70	70	70
7/F	35.5	77	78	80	80	77	77	77	78	80	80	77	76	78	78	75	75	73	68	66	69	68	67	69	69	69	69	68	66	66	66	70	70	70
8/F	38.5	77	77	79	79	77	77	77	78	79	79	77	75	78	78	75	75	73	68	66	69	68	67	69	69	69	69	68	66	66	66	70	70	70
9/F	41.5	77	77	79	79	77	76	77	77	79	79	76	75	78	78	74	75	73	68	66	69	68	67	69	69	69	69	68	66	66	66	70	70	70
10/F	44.4	76	77	79	79	77	76	77	77	79	79	76	75	78	77	74	75	73	68	66	69	68	67	69	69	69	69	68	66	66	65	70	70	69
11/F	47.4	76	77	79	79	76	76	77	77	79	79	76	74	77	77	74	74	73	68	66	69	68	67	69	69	69	68	68	66	66	65	69	70	69
12/F	50.4	76	77	78	78	76	76	76	77	78	78	75	74	77	77	74	74	73	68	66	69	68	67	69	69	69	68	68	66	65	65	69	69	69
13/F	53.4	76	76	78	78	76	75	76	76	78	78	75	74	77	77	74	74	73	68	66	69	68	67	69	69	69	68	68	66	65	65	69	69	69
14/F	56.3	76	76	78	78	76	75	76	76	78	78	75	74	77	77	73	74	72	68	66	69	68	67	69	69	69	68	68	67	66	65	65	69	69
15/F	59.3	76	76	78	78	76	75	76	76	78	78	75	74	77	76	73	74	72	68	65	69	68	67	69	69	69	68	68	67	66	65	65	69	69
16/F	62.3	75	76	78	78	75	75	76	76	78	78	75	73	76	76	73	73	72	68	65	69	68	67	69	69	69	68	68	67	65	65	65	69	69
17/F	65.3	75	76	77	77	75	74	75	76	77	77	74	73	76	76	73	73	72	68	65	69	67	66	69	69	69	68	68	67	65	65	65	69	69
18/F	68.2	75	76	77	77	75	74	75	76	77	77	74	73	76	76	73	73	72	68	65	69	67	66	69	69	68	68	68	67	65	65	65	69	69
19/F	71.2	75	75	77	77	75	74	75	75	77	77	74	73	76	76	73	73	72	68	65	69	67	66	69	69	68	68	68	67	65	65	65	69	69
Max Noise Level	77	78	80	80	77	77	77	77	78	80	80	77	76	79	79	75	75	74	68	66	70	68	67	70	69	69	68	68	67	66	66	70	70	70
Exceedance		16				16						17				16			0		0		0		0		0		0			0		

Total no. of Flats:	336
Total no. of Exceedance:	226
Compliance Level:	33%
Max. Noise Level:	80

Notes:

71	Noise level exceed standard of 70 dB(A)
--	Not Available at this residential storey

Predicted Road Traffic Noise (L10, dB(A)) at Selected Sensitive Receivers
Mitigated (Acoustic Fin, Solid Wall) (PM Peak Flow)

Tower 1

Floor	mPD	N1-01	N1-02	N1-03	N1-04	N1-05	N1-06	N1-07	N1-08	N1-09	N1-10	N1-11	N1-12	N1-13	N1-14	N1-15	N1-16	N1-17	N1-18	N1-19	N1-20	N1-21	N1-22	N1-23	N1-24	N1-25	N1-26	N1-27	N1-28	N1-29	N1-30	N1-31	N1-32
3/F	23.6	69	68	69	69	75	77	66	66	66	66	67	68	64	62	65	65	68	68	64	63	65	65	68	68	63	63	65	65	68	68	64	62
4/F	26.6	69	69	69	69	75	77	76	77	77	77	78	80	74	72	75	74	79	79	73	73	74	74	79	79	73	73	74	74	79	79	73	72
5/F	29.6	69	69	69	69	75	77	77	77	77	77	78	80	76	75	77	77	80	80	76	76	76	77	79	80	76	75	76	76	80	80	76	75
6/F	32.5	69	69	69	69	75	77	76	77	77	78	78	79	77	75	77	77	79	79	77	76	77	77	79	79	77	76	77	77	79	79	77	76
7/F	35.5	69	69	69	69	75	77	76	77	77	78	78	79	77	75	77	77	79	79	77	76	77	77	79	79	77	76	77	77	79	79	77	76
8/F	38.5	69	69	69	69	75	77	76	76	77	77	78	79	77	75	77	77	79	79	77	76	77	77	79	79	76	76	77	77	79	79	76	75
9/F	41.5	69	69	69	69	75	76	76	76	77	77	78	79	76	75	77	77	79	79	76	76	76	77	79	79	76	76	76	77	79	79	76	75
10/F	44.4	69	68	69	69	75	76	76	76	77	77	77	78	76	75	76	77	78	78	76	76	76	77	78	78	76	75	76	76	78	78	76	75
11/F	47.4	69	68	68	69	74	76	76	76	76	77	77	78	76	74	76	77	78	78	76	75	76	77	78	78	76	75	76	76	78	78	76	75
12/F	50.4	69	68	68	69	74	76	76	76	76	77	77	78	76	74	76	76	78	78	76	75	76	76	78	78	75	75	76	76	78	78	76	75
13/F	53.4	68	68	68	68	74	76	76	76	76	76	77	78	76	74	76	76	78	78	75	75	76	76	78	78	75	75	76	76	78	78	75	74
14/F	56.3	68	68	68	68	74	76	75	76	76	76	77	78	75	74	76	76	77	77	75	75	76	77	77	75	74	75	76	77	77	75	74	
15/F	59.3	68	68	68	68	74	76	75	75	76	76	76	77	75	73	75	76	77	77	75	74	75	76	77	77	75	74	75	75	77	77	75	74
16/F	62.3	68	68	68	68	74	75	75	75	76	76	76	77	75	73	75	76	77	77	75	74	75	76	77	77	75	74	75	75	77	77	75	74
17/F	65.3	68	68	68	68	74	75	75	75	75	76	76	77	75	73	75	75	77	77	75	74	75	75	77	77	74	74	75	75	77	77	75	73
18/F	68.2	68	68	68	68	74	75	75	75	75	76	76	77	75	73	75	75	77	77	75	74	75	75	77	77	74	74	75	75	77	77	74	73
19/F	71.2	68	68	68	68	74	75	75	75	75	76	76	77	74	73	75	75	77	77	74	74	75	75	77	77	74	74	75	75	77	76	74	73
Max Noise Level		69	69	69	69	75	77	77	77	77	78	78	80	77	75	77	77	80	77	76	77	77	79	80	77	76	77	77	77	80	80	77	76
Exceedance		0					17				16		16				16		16		16		16		16		16		16		16		16

Floor	mPD	N1-33	N1-34	N1-35	N1-36	N1-37	N1-38	N1-39	N1-40	N1-41	N1-42	N1-43	N1-44	N1-45	N1-46	N1-47	N1-48	N1-49	N1-50	N1-51	N1-52	N1-53	N1-54	N1-55	N1-56	N1-57	N1-58	N1-59	N1-60	N1-61	N1-62	N1-63	N1-64	N1-65
3/F	23.6	64	64	68	68	64	63	65	64	68	68	64	63	67	79	64	66	66	65	64	65	64	--	--	--	--	--	--	--	--	--	--	--	--
4/F	26.6	74	74	79	79	73	73	74	74	79	79	76	74	78	79	75	73	71	67	65	68	67	66	68	68	68	68	67	65	65	65	69	69	--
5/F	29.6	76	76	80	80	76	76	76	76	80	80	77	75	78	78	75	75	73	67	65	69	67	66	69	69	68	68	67	65	65	65	69	69	69
6/F	32.5	76	77	79	79	77	76	77	77	79	79	76	75	78	78	75	75	73	67	65	69	67	66	69	69	68	68	67	65	65	65	69	69	69
7/F	35.5	76	77	79	79	77	76	77	77	79	79	76	75	78	78	74	75	73	67	65	69	67	66	69	68	68	68	67	65	65	65	69	69	69
8/F	38.5	76	77	79	79	77	76	77	77	79	79	76	75	78	77	74	74	73	67	65	68	67	66	69	68	68	68	67	65	65	64	69	69	69
9/F	41.5	76	77	78	79	76	76	76	77	78	78	76	74	77	77	74	74	72	67	65	68	67	66	68	68	68	68	67	65	65	64	69	69	69
10/F	44.4	76	76	78	78	76	75	76	76	78	78	75	74	77	77	74	74	72	67	65	68	67	66	68	68	67	67	67	65	64	64	69	69	68
11/F	47.4	76	76	78	78	76	75	76	76	78	78	75	74	77	77	73	74	72	67	65	68	67	66	68	68	67	67	67	65	64	64	68	69	68
12/F	50.4	75	76	78	78	76	75	76	76	78	78	75	74	77	76	73	74	72	67	65	68	67	66	68	68	67	67	67	65	64	64	68	68	68
13/F	53.4	75	76	78	78	75	75	76	76	78	78	75	73	76	76	73	73	72	67	65	68	67	66	68	68	67	67	67	65	64	64	68	68	68
14/F	56.3	75	76	77	77	75	74	75	76	77	77	74	73	76	76	73	73	72	67	64	68	67	66	68	68	67	67	66	65	64	64	68	68	68
15/F	59.3	75	75	77	77	75	74	75	76	77	77	74	73	76	76	73	73	71	67	64	68	67	66	68	68	67	67	66	64	64	64	68	68	68
16/F	62.3	75	75	77	77	75	74	75	75	77	77	74	73	76	76	72	73	71	67	64	68	67	66	68	68	67	67	66	64	64	64	68	68	68
17/F	65.3	75	75	77	77	75	74	75	75	77	77	74	72	76	75	72	73	71	67	64	68	66	65	68	68	67	67	66	64	64	64	68	68	68
18/F	68.2	74	75	77	77	74	74	75	75	77	77	74	72	75	75	72	72	71	67	64	68	66	65	68	68	67	67	66	64	64	64	68	68	68
19/F	71.2	74	75	76	77	74	73	75	75	76	76	73	72	75	75	72	72	71	67	64	68	66	65	68	68	67	67	66	64	64	64	68	68	68
Max Noise Level	76	77	80	80	77	76	77	80	80	80	77	75	78	79	75	75	73	67	65	69	67	66	69	69	68	68	67	65	65	65	69	69	69	
Exceedance		16				16				16		17			16				0		0		0		0		0		0		0		0	

Total no. of Flats:	336
Total no. of Exceedance:	226
Compliance Level:	33%
Max. Noise Level:	80

Notes:
71 Noise level exceed standard of 70 dB(A)
-- Not Available at this residential storey

Predicted Road Traffic Noise (L10, dB(A)) at Selected Sensitive Receivers
Mitigated (Acoustic Window (Baffle Type), Enhanced Acoustic Balcony (Baffle Type), Fixed Glazing with Maintenance Window, Self-Closing Door, Acoustic Fin, Solid Wall)

Tower 1																																	
Floor	mPD	N1-01	N1-02	N1-03	N1-04	N1-05	N1-06	N1-07	N1-08	N1-09	N1-10	N1-11	N1-12	N1-13	N1-14	N1-15	N1-16	N1-17	N1-18	N1-19	N1-20	N1-21	N1-22	N1-23	N1-24	N1-25	N1-26	N1-27	N1-28	N1-29	N1-30	N1-31	N1-32
3/F	23.6	70	70	70	70	-	69	-	66	66	67	68	69	65	63	66	66	69	69	64	64	65	66	68	68	64	63	65	65	68	68	64	63
4/F	26.6	70	70	70	70	-	69	-	70	70	67	70	-	67	68	68	68	-	-	66	67	68	67	-	-	66	67	68	67	-	-	66	66
5/F	29.6	70	70	70	70	-	69	-	70	70	67	70	-	69	70	70	70	-	-	69	69	70	69	-	-	68	69	70	69	-	-	69	69
6/F	32.5	70	70	70	70	-	69	-	70	70	67	70	-	70	70	71	70	-	-	69	70	70	70	-	-	69	69	70	70	-	-	69	69
7/F	35.5	70	70	70	70	-	69	-	70	70	67	70	-	69	70	70	70	-	-	69	70	70	70	-	-	69	69	70	70	-	-	69	69
8/F	38.5	70	70	70	70	-	69	-	70	70	67	70	-	69	70	70	70	-	-	69	69	70	70	-	-	69	69	70	69	-	-	69	69
9/F	41.5	70	70	70	70	-	69	-	70	70	67	70	-	69	70	70	70	-	-	69	69	70	69	-	-	69	69	70	69	-	-	69	69
10/F	44.4	70	69	70	70	-	69	-	70	69	67	69	-	69	70	70	69	-	-	69	69	70	69	-	-	68	69	70	69	-	-	69	68
11/F	47.4	70	69	69	70	-	69	-	70	69	67	69	-	69	69	70	69	-	-	68	69	69	69	-	-	68	68	69	69	-	-	68	68
12/F	50.4	69	69	69	70	-	68	-	70	69	66	69	-	68	69	69	69	-	-	68	69	69	69	-	-	68	68	69	69	-	-	68	68
13/F	53.4	69	69	69	69	-	68	-	70	69	66	69	-	68	69	69	69	-	-	68	68	69	69	-	-	68	68	69	68	-	-	68	68
14/F	56.3	69	69	69	69	-	68	-	69	69	66	69	-	68	69	69	69	-	-	68	68	69	68	-	-	68	68	69	68	-	-	68	67
15/F	59.3	69	69	69	69	-	68	-	69	69	66	68	-	68	68	69	68	-	-	68	68	69	68	-	-	67	68	69	68	-	-	67	67
16/F	62.3	69	69	69	69	-	68	-	69	68	66	68	-	67	68	69	68	-	-	67	68	69	68	-	-	67	67	68	68	-	-	67	67
17/F	65.3	69	69	69	69	-	68	-	69	68	66	68	-	67	68	69	68	-	-	67	68	68	68	-	-	67	67	68	68	-	-	67	67
18/F	68.2	69	69	69	69	-	68	-	69	68	66	68	-	67	68	68	68	-	-	67	67	68	68	-	-	67	67	68	68	-	-	67	67
19/F	71.2	69	69	69	69	-	67	-	69	68	65	68	-	67	68	68	68	-	-	67	67	68	68	-	-	67	67	68	67	-	-	67	66
Max Noise Level	70	70	70	70	70	0	69	0	70	70	67	70	69	70	70	71	70	69	69	69	70	70	70	68	68	69	69	70	70	68	68	69	69
Exceedance		0				0		0			0		0			1		0		0		0		0		0		0		0		0	

Floor	mPD	N1-33	N1-34	N1-35	N1-36	N1-37	N1-38	N1-39	N1-40	N1-41	N1-42	N1-43	N1-44	N1-45	N1-46	N1-47	N1-48	N1-49	N1-50	N1-51	N1-52	N1-53	N1-54	N1-55	N1-56	N1-57	N1-58	N1-59	N1-60	N1-61	N1-62	N1-63	N1-64	N1-65
3/F	23.6	65	65	68	68	64	63	65	65	68	68	65	63	-	69	65	67	67	66	65	66	66	--	--	--	--	--	--	--	--	--	--	--	--
4/F	26.6	68	67	-	-	66	67	68	67	-	69	-	69	-	69	65	-	67	68	66	69	68	67	69	69	69	69	68	66	66	66	70	70	70
5/F	29.6	69	69	-	-	69	69	70	69	-	70	-	70	-	68	65	-	68	68	66	70	68	67	70	70	69	69	68	66	66	66	70	70	70
6/F	32.5	70	70	-	-	69	70	70	70	-	69	-	70	-	68	64	-	68	68	66	70	68	67	70	69	69	69	68	66	66	66	70	70	70
7/F	35.5	70	69	-	-	69	69	70	70	-	69	-	70	-	68	64	-	68	68	66	69	68	67	69	69	69	69	68	66	66	66	70	70	70
8/F	38.5	70	69	-	-	69	69	70	69	-	69	-	70	-	68	64	-	68	68	66	69	68	67	69	69	69	69	68	66	66	66	70	70	70
9/F	41.5	69	69	-	-	69	69	70	69	-	69	-	69	-	67	64	-	68	68	66	69	68	67	69	69	69	69	68	66	66	66	70	70	70
10/F	44.4	69	69	-	-	69	69	69	69	-	68	-	69	-	67	63	-	67	68	66	69	68	67	69	69	69	69	68	66	66	65	70	70	69
11/F	47.4	69	69	-	-	68	68	69	69	-	68	-	69	-	67	63	-	67	68	66	69	68	67	69	69	69	68	68	66	66	65	69	70	69
12/F	50.4	69	68	-	-	68	68	69	69	-	68	-	69	-	67	63	-	67	68	66	69	68	67	69	69	69	68	68	66	65	65	69	69	69
13/F	53.4	69	68	-	-	68	68	69	68	-	68	-	68	-	67	63	-	67	68	66	69	68	67	69	69	69	68	68	66	65	65	69	69	69
14/F	56.3	68	68	-	-	68	68	69	68	-	67	-	68	-	66	63	-	67	68	66	69	68	67	69	69	68	68	67	66	65	65	69	69	69
15/F	59.3	68	68	-	-	68	68	68	68	-	67	-	68	-	66	62	-	67	68	65	69	68	67	69	69	68	68	67	66	65	65	69	69	69
16/F	62.3	68	68	-	-	67	67	68	68	-	67	-	68	-	66	62	-	67	68	65	69	68	67	69	69	68	68	67	65	65	65	69	69	69
17/F	65.3	68	68	-	-	67	67	68	68	-	67	-	68	-	66	62	-	66	68	65	69	67	66	69	69	68	68	67	65	65	65	69	69	69
18/F	68.2	68	67	-	-	67	67	68	68	-	67	-	67	-	66	62	-	66	68	65	69	67	66	69	68	68	68	67	65	65	65	69	69	69
19/F	71.2	68	67	-	-	67	67	68	67	-	67	-	67	-	65	62	-	66	68	65	69	67	66	69	68	68	68	67	65	65	65	69	69	69
Max Noise Level	70	70	68	68	69	70	70	68	70	65	70	0	69	65	67	68	68	66	70	68	67	70	70	69	68	68	68	67	66	66	66	70	70	70
Exceedance		0			0		0			0		0		0		0		0		0		0		0		0		0		0		0		0

Total no. of Flats:	336
Total no. of Exceedance:	1
Compliance Level:	100%
Max. Noise Level:	71

Noted:

- 71 Noise level exceed standard of 70 dB(A)
- Not Available at this residential storey
- Acoustic Window (Baffle Type)
- Enhanced Acoustic Balcony (Baffle Type)
- Fixed Glazing with Maintenance Window
- Self-Closing Door

Appendix 3.6

Schedule of Road Traffic Noise Mitigation Measures

Schedule of Road Traffic Noise Mitigation Measures

Tower 1

NSRs	Unit	Room	Floor	Noise Mitigation Measures
N1-05	A2	MBR	3/F-19/F	Fixed Glazing with Maintenance Window
N1-06	A2	MBR	3/F-19/F	Acoustic Window (Baffle Type)
N1-07	A2	MBR	3/F-19/F	Fixed Glazing with Maintenance Window
N1-08	A2	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-09	A3	MBR	4/F-19/F	Acoustic Window (Baffle Type)
N1-10	A3	LIV	4/F-19/F	Enhanced Acoustic Balcony (Baffle Type)
N1-11	A3	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-11	A3	BR	3/F-19/F	1.5m Acoustic Fin with Sound Absorption Material
N1-12	A4	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-13	A4	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-14	A4	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-14	A4	BR	3/F-19/F	0.2m Acoustic Fin with Sound Absorption Material
N1-15	A5	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-16	A5	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-17	A5	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-18	A6	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-19	A6	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-20	A6	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-21	A7	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-22	A7	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-23	A7	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-24	A8	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-25	A8	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-26	A8	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-27	B8	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-28	B8	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-29	B8	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-30	B7	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-31	B7	LIV	4/F-19/F	Acoustic Window (Baffle Type)

Schedule of Road Traffic Noise Mitigation Measures

N1-32	B7	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-33	B6	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-34	B6	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-35	B6	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-36	B5	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-37	B5	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-38	B5	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-39	B4	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-40	B4	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-41	B4	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-42	B3	LIV	4/F-19/F	Enhanced Acoustic Balcony (Baffle Type)
N1-43	B3	LIV	4/F-19/F	Fixed Glazing with Maintenance Window
N1-44	B3	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-44	B3	BR	3/F-19/F	0.8m Acoustic Fin with Sound Absorption Material
N1-45	B3	MBR	3/F-19/F	Fixed Glazing with Maintenance Window
N1-46	B3	MBR	3/F-19/F	1.5m Acoustic Fin with Sound Absorption Material
N1-46	B3	MBR	3/F-19/F	Acoustic Window (Baffle Type)
N1-47	B2	LIV	4/F-19/F	Enhanced Acoustic Balcony (Baffle Type)
-	B2	LIV	4/F-19/F	Fixed Glazing with Maintenance Window
N1-48	B2	BR	4/F-19/F	Fixed Glazing with Maintenance Window
N1-49	B2	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-06 to N1-11	A2	-	3/F	1.5m high solid wall at 3/F the flat roof (Please refer to Figure 3.2 for details)
N1-12 to N1-45	A4 to B3	-	3/F	1.5m high solid wall at 3/F the flat roof (Please refer to Figure 3.2 for details)
N1-47 to N1-48	B2	-	3/F	1.5m high solid wall at 3/F the flat roof (Please refer to Figure 3.2 for details)
N1-10 to N1-11	A3	-	3/F-19/F	Sound Absorption Material on Façade (Please refer to Figure 3.2 for details)
N1-13 to N1-16	A4 to A5	-	3/F-19/F	Sound Absorption Material on Façade (Please refer to Figure 3.2 for details)
N1-19 to N1-22	A6 to A7	-	3/F-19/F	Sound Absorption Material on Façade (Please refer to Figure 3.2 for details)
N1-25 to N1-28	A8 to B8	-	3/F-19/F	Sound Absorption Material on Façade (Please refer to Figure 3.2 for details)
N1-31 to N1-34	B7 to B6	-	3/F-19/F	Sound Absorption Material on Façade (Please refer to Figure 3.2 for details)
N1-37 to N1-40	B5 to B4	-	3/F-19/F	Sound Absorption Material on Façade (Please refer to Figure 3.2 for details)
N1-44 to N1-45	B3	-	3/F-19/F	Sound Absorption Material on Façade (Please refer to Figure 3.2 for details)

Appendix 4.1

Information Extracted from Approved EA report for Approved Rezoning Application (Application No.: Y/TM-LTYT/11)

Procedure	Assumption/Remarks	Reference
14. Incorporate Façade Correction	+2.5 dB(A)	(2)
15. Calculate the L_{max} (2300 – 0700)	L_{max} at NSR = L_{max} rolling + L_{max} A/C + L_{max} structure L_{eq} max rolling at NSR = SEL + C_{speed} + C_{freq} + C_{track} + C_{joint} + $C_{distance}$ + C_{angle} + $C_{Barrier}$ L_{max} structure at NSR = SEL + C_{freq} + $C_{distance}$ + C_{angle} + $C_{Barrier}$	-
16. Calculate the overall noise level from all rail segments including rolling noise, noise from air conditioning units and structural re-radiated noise (L_{eq} 24hr)	L_{eq} 24hour at NSR = L_{eq} 24hour rolling + L_{eq} 24hour A/C + L_{eq} 24hour structure L_{eq} 24hour rolling at NSR = SEL + C_{speed} + C_{freq} + C_{track} + C_{joint} + $C_{distance}$ + C_{angle} + $C_{Barrier}$ L_{eq} 24hour structure at NSR = SEL + C_{freq} + $C_{distance}$ + C_{angle} + $C_{Barrier}$	-
References: (1) "West Rail Operation Noise Assessment Report" prepared by the MTRC (July 2015). (2) "Calculation of Railway Noise 1995" issued by the Department of Transport, UK. (3) EIA Report (Register No. AEIAR-028/1999) of "East Rail Extensions - Tai Wai to Ma On Shan, KCRC East Rail Extension". (4) Nelson, P. M. (ed.) (1987). Transportation Noise Reference Book, Butterworths.		

Table 2.4 Input for Rail Noise Assessment

Parameters	Tuen Ma Line (TML)	Light Rail Transit (LRT)
Train type and no. of car	SP1900 (or equivalent), 9-car train (approximate 225 m long) *	LRV, 2 cars of total 40 m as conservative scenario ‡
Rolling Noise (at reference distance 25m)	SEL Northbound (Segment WN1-WN9, WN11-WN13) = 81.4 dB(A); L_{max} Northbound (Segment WN1-WN9, WN11-WN13) = 74.1 dB(A)## SEL Northbound (Segment WN10) = 0 dB(A); L_{max} Northbound (Segment WN10) = 0 dB(A)##	SEL Northbound (Segment LN1-LN4) = 78.9 dB(A); L_{max} Northbound (Segment LN1-LN4) = 77.9 dB(A) ## SEL Northbound (Segment LN5) = 82.9 dB(A); L_{max} Northbound (Segment LN5) = 81.0 dB(A) ##

Parameters	Tuen Ma Line (TML)	Light Rail Transit (LRT)
	SEL Southbound (Segment WS1-WS9, WS11-13) = 80.7 dB(A); $L_{\max}$ Southbound (Segment WS1-WS9, WS11-WS13) = 73.4 dB(A) ## SEL Southbound (Segment WS10) = 0 dB(A); $L_{\max}$ Southbound (Segment WS10) = 0 dB(A) ## (8 cars at 25 m)	SEL Northbound (Segment LN6-LN8) = 78.2 dB(A); $L_{\max}$ (Segment LN6-LN8) = 74.3 dB(A) ## SEL Northbound (Segment LN9-LN13) = 80.9 dB(A); $L_{\max}$ Northbound (Segment LN9-LN13) = 78.7 dB(A) ## SEL Southbound (Segment LS1-LS4) = 75.7 dB(A); $L_{\max}$ Southbound (Segment LS1-LS4) = 74.0 dB(A) ## SEL Southbound (Segment LS5) = 77.4 dB(A); $L_{\max}$ Southbound (Segment LS5) = 75.9 dB(A) ## SEL Southbound (Segment LS6-LS8) = 72.8 dB(A); $L_{\max}$ Southbound (Segment LS6-LS8) = 68.7 dB(A) ## SEL Southbound (Segment LS9-LS13) = 78.5 dB(A); $L_{\max}$ Southbound (Segment LS9-LS13) = 74.4 dB(A) ##
Air Conditioning Noise	$L_{\max}$ at viaduct = 48.8 dB(A) (8 cars at 25 m) †	Not applicable as the contribution is insignificant
Structural Re-radiated Noise	SEL = 62.8 dB(A) for viaduct structure ** $L_{\max}$ = 58.6 dB(A) for viaduct structure ** SEL = 66.9 dB(A) for enclosed viaduct (Segment WN10) ** $L_{\max}$ = 63.0 dB(A) for enclosed viaduct (Segment WN10) ** SEL = 67.0 dB(A) for enclosed viaduct (Segment WS10) **	SEL = 60.5 dB(A) for non-enclosed viaduct structure ** $L_{\max}$ = 60.3 dB(A) for non-enclosed viaduct structure ** SEL and $L_{\max}$ at viaduct have been measured (2-car train at 25 m) **

Parameters	Tuen Ma Line (TML)	Light Rail Transit (LRT)
	$L_{\max} = 63.9 \text{ dB(A)}$ for enclosed viaduct (Segment WS10) ** SEL and $L_{\max}$ at viaduct have been measured (8 cars at 25 m) **	
Train frequency per 30 minutes per direction	14 number during peak daytime # 10 number during peak night-time *	14 number during peak daytime # 16 number during peak night-time #
24 hour train frequency per direction	260 #	382 #
Train Speed for tracks within Assessment Area	Station speed, 50 km per hour† Approach and leaving Station, 80 km per hour†	70 km per hour #
References: †: "West Rail Operation Noise Assessment Report" prepared by the MTRC (July 2015) *: Information is adopted by referring Environmental Permit (Permit No. FEP-24/004/1998/J) for West Rail – Final Assessment Report West Kowloon to Tuen Mun Centre. **: EIA Report (Register No. AEIAR-227/2020) "Development at San Hing Road and Hong Po Road, Tuen Mun" #: Updated information provided by MTRC (Appendix 2.1) ##: Based on on-site noise measurements conducted for this EA Study.		

Appendix 2.1

Railway Operation Information Provided by MTRC

MTR Corporation Limited
香港鐵路有限公司
www.mtr.com.hk



Ramboll Hong Kong Limited,
21/F, BEA Harbour View Centre,
56 Gloucester Road,
Wan Chai, Hong Kong

Our ref: T&ESD/E&IC/ES/EnvE/L1184

Date: - 8 MAY 2023

Attention: Ms. Katie Yu

By Post and Fax
(Fax no.: 3465 2899)

Dear Ms. Yu,

Re: Re: Proposed Residential Development at D.D.130, Lam Tei, Tuen Mun
Request for Tuen Ma Line and Light Rail Transit Information

We refer to your letter (ref.: FECTMLT-EI00_0_0004L.23.docx) dated 17 March 2023 requesting operational information regarding Tuen Ma Line (TML) and Light Rail Transit (LRT).

Please be informed that the information provided in our letter dated 7 September 2021 (ref.: T&ESD/E&IC/ES/EnvE/L1096) is still valid as of the date of this reply, except the following updates:

- There are currently 8 cars per train for the operation condition of TML. However, according to the latest Environmental Permit (EP) for West Rail, the ultimate maximum train cars would be 9 cars.
- For the operational frequency for LRT (from Nai Wai Stop to Siu Hong Stop – Route 610, 614, 615 and 751), the current peak train frequency during the period of 07:00-23:00 hours and 23:00 to 07:00 is about 27 trains per hour per direction and 31 trains per hour per direction respectively. The current train frequency for both directions in one-day operation is about 764 trains, including non-passenger trains.

Please be reminded that any information that may come to your knowledge or come into your possession from MTR Corporation Limited shall only be used solely as reference for this captioned project. Further distribution and/or publication of the above information for purposes not connected with the captioned project are strictly prohibited without the prior consent of MTR Corporation Limited. Please also note that any such information is subject to change without prior notification.

Should you have any additional enquiries, please feel free to contact our Lead Environmental Manager, Ms. Catherine Leung at 2993 4127.

Yours sincerely,

HK Chan
Chief of Operations Engineering Service & Innovation

MTR Corporation Limited
香港鐵路有限公司
www.mtr.com.hk



Ramboll Hong Kong Limited
21/F, BEA Harbour View Centre,
56 Gloucester Road,
Wan Chai,
Hong Kong

Our ref: T&ESD/E&IC/FS/EnvE/L1096

Date: 7 SEP 2021

Attention: Ms. Katie Yu

By Post and Fax
(Fax no.: 3465 2899)

Dear Ms. Yu,

Re: Proposed Residential Development at D.D. 130, Lam Tei, Tuen Mun
Request for West Rail Line Railway and Light Rail Transit Information

We refer to your letter dated 17 August 2021 (ref.: FECTMLT-EI00_0_0001L.21) requesting operational information regarding Tuen Ma Line (TML) and Light Rail Transit (LRT).

Please be informed that the information provided in our letter dated 22 October 2019 (ref.: T&ESD/TS&SE/EnvE/L1017) is still valid as of the date of this reply, except the following updates:

- The daily operating hours for TML and LRT at the concerned section are from approximately 05:30 to 01:15 hours and 05:15 to 01:18 hours respectively.
- The current train frequency for both directions in one-day operation for TML is about 519 trains, including non-passenger trains.
- For the operational frequency for LRT (from Nai Wai Stop to Siu Hong Stop – Route 610, 614, 615 and 751), the current peak train frequency during the period of 23:00 to 07:00 hours is about 33 trains per hour per direction. The current train frequency for both directions in one-day operation is about 798 trains, including non-passenger trains.

Please be reminded that any information that may come to your knowledge or come into your possession from MTR Corporation Limited shall only be used solely as reference for this captioned project. Further distribution and/or publication of the above information for purposes not connected with the captioned project are strictly prohibited without the prior consent of MTR Corporation Limited. Please also note that any such information is subject to change without prior notification.

Should you have any additional enquiries, please feel free to contact our Acting Lead Environmental Manager, Ms. Catherine Leung at 2993 4127.

Yours sincerely,

HK Chan
General Manager – Engineering & Innovation Centre



b.c.c

Siman Tang - General Manager - Ops Performance & Services Mgmt
David Chan - Head of Line Group Management – TML, I.R & Bus
Gary Lam - Sr Signaling & Electronic Control Engineering Manager

MTR Corporation Limited
香港鐵路有限公司
www.mtr.com.hk



Ramboll Hong Kong Limited
21/F, BEA Harbour View Centre,
56 Gloucester Road,
Wan Chai,
Hong Kong

Our ref: T&ESD/TS&SE/EnvE/L1017

Date: 22 OCT 2019

Attention: Ms. Katie Yu

By Post and Fax
(Fax no.: 3465 2899)

Dear Ms. Yu,

Re: Proposed Residential Development at D.D. 130, Lam Tei, Tuen Mun

Request for Information of West Rail Line Railway and Light Rail Transit

We refer to your letter dated 30 September 2019 (ref.: STATMSHTEI01_0_0002L.19) requesting operational information regarding West Rail Line (WRL) and Light Rail Transit (LRT).

Operating Hours

For WRL, the daily operating hours at the concerned section are from approximately 05:00 to 01:00 hours.

For LRT, the daily operating hours at the concerned section are from approximately 05:15 to 01:15 hours.

Number of Cars per Train

Please note that there will be 8 cars per train for the future operating condition of the Tuen Ma Line. However, according to the Environmental Permit for West Rail available via EPD website, the ultimate maximum train cars would be 9 cars.

For LRT, the arrangement of single or coupled-set vehicles will vary depending on the traffic needs and is subject to change without prior notification. For environmental assessment purposes, you may wish to work on the assumption that all vehicles are in coupled-set where appropriate.

Operational Headway for WRL

- The future ultimate daily peak operating train frequency during the period of 07:00-23:00 hours is about 28 trains per hour per direction.
- For the future ultimate daily peak operating train frequency during the period of 23:00-07:00 hours, please refer to the latest Environmental Permit for West Rail Available via the EPD website.
- The current train frequency for both directions in one-day operation is about 551 trains, including non-passenger trains.



Our ref: T&ESD/TS&SE/EnvE/L1017

Date : 22 OCT 2019

Operational Frequency for LRT (From Nai Wai Stop to Siu Hong Stop – Route 610, 614, 615 and 751)

- The current peak train frequency during the period of 07:00-23:00 hours is about 28 trains per hour per direction.
- The current peak train frequency during the period of 23:00 to 07:00 hours is about 27 trains per hour per direction.
- The current train frequency for both directions in one-day operation is about 913 trains, including non-passenger trains.

Please note that Light Rail service frequencies are subject to change without prior notification due to future patronage growth. As such, please consider allowing a buffer on the assessment assumptions when estimating future possible environmental impacts.

Speed Profile

For WRL, the current maximum train speed for the section of track between Siu Hong Station and Tin Shui Wai Station is 100 km/h for both directions. However, please note that the latest Environmental Permit for WRL has considered a maximum operating speed of 130km/hr (i.e. EP limit) to cater for potential speed increment in the future.

For LRT, the current maximum train speed for the section of track between Nai Wai Stop and Siu Hong Stop is 70 km/h for both directions.

Please be reminded that any information that may come to your knowledge or come into your possession from MTR Corporation Limited shall only be used solely as reference for this captioned project. Further distribution and/or publication of the above information for purposes not connected with the captioned project are strictly prohibited without the prior consent of MTR Corporation Limited. Please also note that any such information is subject to change without prior notification.

Should you have any additional enquiries, please feel free to contact our Environmental Engineering Manager, Ms. Catherine Leung at 2993 4127.

Yours sincerely,

A handwritten signature in black ink, appearing to read 'HK Chan'.

HK Chan

Deputy General Manager – Train Services & Systems Engineering

Appendix 4.2

Information Extracted from Approved EA report for Approved EIA report for Development at San Hing Road and Hong Po Road, Tuen Mun (AEIAR-227/2020)

- 5.9.5 Additional on-site measurements of structure re-radiated noise from viaduct section with and without mounted structure were conducted along the section of WRL within the assessment area. The noise measurement locations are appended in [Appendix 5.19](#).

LRT Source Term

- 5.9.6 On-site measurements of rolling noise from at-grade section and structure re-radiated noise from viaduct section were conducted along the section of LRT within the assessment area. The noise measurement locations are appended in [Appendix 5.19](#).

Rail Noise Assessment Procedures

- 5.9.7 The assessment is based on the “Calculation of Railway Noise 1995” (CRN) issued by the Department of Transport, UK. It would be carried out to assess various worst-case scenarios under normal, abnormal, transient and emergency operation. The railway will be divided into number of segments to address changes in traffic flow, speed, gradient of the track, turnout, or due to progress variation in screening along the railway lines. The propagation of rail noise to the noise sensitive receivers (NSRs) will be corrected by distance, ground and air absorption, screening effect by barriers, reflection, angle of view at the reception point, train speed, number of trains, etc.

- 5.9.8 **Table 5.32** summarises each step of calculation and the assumptions in this approach. **Table 5.33** includes the source term information based on on-site measurement, extracted from relevant studies, other literatures and updated information provided by MTRC (shown in [Appendix 5.20](#)) adopted for this study. The potential railway noise sources of WRL and LRT have been identified. Therefore, cumulative impact of WRL and LRT will be assessed.

Table 5.32 Procedures of Rail Noise Assessment

Steps	Assumptions / Remarks	Reference
Identify the extent of the site area to be affected by the air-borne noise from the rail operation; locate the assessment points at the representative NSRs	The first layer of planned NSRs located near WRL and LRT will be selected for rail noise prediction and evaluation	-
Identify the noise sources of rail operation	WRL: - The rolling noise is emitted through the gap between the train and the walkway on the viaduct of WRL. The multi-plenum system installed at the viaduct section of WRL absorbs some of the noise from train wheel-rail interaction. The effect of the system had been included in the source measurement in the previous study ^(A). - Noise from air conditioning units located on the roof of each car and source level was measured in the previous study ^(A). - Structural re-radiated noise generated from the vibration of the viaduct during train passing by was measured on site in this Study. LRT - Rolling noise and structure re-radiated noise were measured on site in this Study.	A
Identify the train type and the source term of the train	Refers to Table 5.33 .	-

Steps	Assumptions / Remarks	Reference
Calculate the SEL from $L_{\max}$ at reference conditions	$SEL = L_{\max} + 10\log(L/V) + 10.5 - 10\log[(4D/(4D^2+1)) + 2\tan^{-1}(1/(2D))]$ where $D = d/L$, d = perpendicular distance from the track (m), L = train length (m) and V = train speed (km per hour)	Equation 15.21 of D
Evaluate the correction due to train speed	$+20 \log_{10}(V/V_{\text{ref}})$ in dB(A) where V = Train speed, V_{ref} = Reference train speed	B
Correction of train frequency for 30 mins	$+10 \log_{10}(N)$ in dB(A) where N = No. of trains per 30 minutes per direction	B
Incorporate Track Wear Correction	$+3$ dB(A)	B
Incorporate Joint/Turnout Correction (to represent the augmentation in noise due to thermal expansion joints)	With conservative assumption, $+7.0$ dB(A) for a representative 20 m segment	C
Evaluate the distance between the NSR and the track and make distance correction	$-10 \log_{10}(d'/d_{\text{ref}})$ in dB(A) where d' = Slant distance from track to NSR and d_{ref} = Reference distance	B
Evaluate the angle of view and calculate angle of view correction	$+10 \log_{10}(\pi\theta/180 - \cos 2\alpha \sin \theta) - 5$ in dB(A) where θ = Angle of view and α = Acute angle between a line drawn through the NSR, parallel to the track, and the line bisecting the angle of view, θ	B
Incorporate Barrier Correction	Shadow Zone: • -21 dB(A) for $\delta > 2.5$ m where δ is the path difference in meter • $-7.75 \log_{10}(5.2 + 203 \delta)$ dB(A) for $0 \leq \delta < 2.5$ m Illuminated Zone: • 0 dB(A) for $\delta > 0.4$ m • $0.88 + 2.14 \log_{10}(10^{-3} + \delta)$ dB(A) for $0 \leq \delta < 0.4$ m	Chart 6(a) of B
Calculate the overall noise level from all rail segments including rolling noise, noise from air conditioning units and structural re-radiated noise	$Leq(30\text{mins})$, overall at NSR = $Leq(30\text{mins})$, rolling + $Leq(30\text{mins})$, A/C + $Leq(30\text{mins})$, structure $Leq(30\text{mins})$, rolling at NSR = $SEL + C_{\text{speed}} + C_{\text{freq}} + C_{\text{track}} + C_{\text{joint}} + C_{\text{distance}} + C_{\text{angle}} + C_{\text{Barrier}} + C_{\text{air absorption}}$ $Leq(30\text{mins})$, A/C at NSR = $SEL + C_{\text{freq}} + C_{\text{distance}} + C_{\text{angle}} + C_{\text{Barrier}}$ $Leq(30\text{mins})$, structure at NSR = $SEL + C_{\text{freq}} + C_{\text{distance}} + C_{\text{angle}} + C_{\text{Barrier}} + C_{\text{air absorption}}$	-
Incorporate Façade Correction	$+2.5$ dB(A)	B
Calculate the $L_{\max}$ (2300 – 0700)	$L_{\max}$, overall at NSR = $L_{\max}$, rolling + $L_{\max}$, A/C + $L_{\max}$, structure $L_{\max}$, rolling at NSR = $L_{\max} + C_{\text{speed}} + C_{\text{freq}} + C_{\text{track}} + C_{\text{joint}} + C_{\text{distance}} + C_{\text{angle}} + C_{\text{Barrier}}$ $L_{\max}$, structure at NSR = $L_{\max} + C_{\text{freq}} + C_{\text{distance}} + C_{\text{angle}} + C_{\text{Barrier}}$	-

Steps	Assumptions / Remarks	Reference
References:		
A.	"West Rail Operation Noise Assessment Report" prepared by the MTRC (July 2015).	
B.	"Calculation of Railway Noise 1995" issued by the Department of Transport, UK.	
C.	EIA Report (Register No. AEIAR-028/1999) of "East Rail Extensions - Tai Wai to Ma On Shan, KCRC East Rail Extension".	
D.	Nelson, P. M. (ed.) (1987). <i>Transportation Noise Reference Book</i> , Butterworths.	

Table 5.33 Input for Rail Noise Assessment

Parameters	WRL	LRT
Train type and no. of car	SP1900 (or equivalent), 9-car train (approximate 225 m long) *	LRV, 2 cars of total 40 m as conservative scenario ‡
Rolling Noise	SEL Northbound = 81.4 dB(A) SEL Southbound = 80.7 dB(A) L_{max} Northbound = 74.1 dB(A) L_{max} Northbound = 73.4 dB(A) (8 cars running 130 km per hour at 25 m) †	SEL Northbound (Segment LN0-LN2) = 78.0 dB(A) SEL Northbound (Segment LN3-LN13) = 75.3 dB(A) SEL Southbound (Segment LS0-LS2) = 73.5 dB(A) SEL Southbound (Segment LS3-LS13) = 74.1 dB(A) L_{max} Northbound (Segment LN0-LN2) = 76.3 dB(A) L_{max} Northbound (Segment LN3-LN13) = 73.1 dB(A) L_{max} Southbound (Segment LS0-LS2) = 70.1 dB(A) L_{max} Southbound (Segment LS3-LS13) = 70.7 dB(A) SEL and L_{max} have been measured (2-car train running at 70 km per hour at 25 m) ##
Air Conditioning Noise	L_{max} at viaduct = 48.8 dB(A) L_{max} at station = 54.8 dB(A) (8 cars at 25 m) † SEL of the Air Conditioning Noise refers to the following equation as stated in Equation 15.21 of <i>Transportation Noise Reference Book</i>: $SEL = L_{max} + 10\log(L/V) + 10.5 - 10\log[(4D/(4D^2+1)) + 2\tan^{-1}(1/(2D))]$ where $D = d/L$, d = perpendicular distance from the track (m), L = train length (m) and V = train speed (km per hour)	Not applicable as insignificant contribution‡
Structural Re-radiated Noise	SEL = 62.8 dB(A) for non-enclosed viaduct structure L_{max} = 58.6 dB(A) for non-enclosed viaduct structure	SEL = 60.5 dB(A) for non-enclosed viaduct structure L_{max} = 60.3dB(A) for non-enclosed viaduct structure

Parameters	WRL	LRT
	SEL Northbound = 66.9 dB(A) for enclosed viaduct SEL Southbound = 67.0 dB(A) for enclosed viaduct L _{max} Northbound = 63.0 dB(A) for enclosed via-duct L _{max} Southbound = 63.9 dB(A) for enclosed viaduct SEL and L _{max} at viaduct have been measured (8 cars at 25 m) ##	SEL and L _{max} at viaduct have been measured (2-car train at 25 m) ##
Train frequency per 30 minutes per direction	14 number during peak daytime # 10 number during peak night-time*	14 number during peak daytime # 14 number during peak night-time #
Train Speed for tracks within Assessment Area	Station speed, 50 km per hour† Approach and leaving Station, 80 km per hour†	70 km per hour #
Note: † “West Rail Operation Noise Assessment Report” prepared by the MTRC (July 2015). The same source term was adopted in the approved EIA Report for the Hung Shui Kiu Development (AEIAR-203/2016). * Information is adopted by referring Environmental Permit (Permit No. FEP-24/004/1998/I) for West Rail – Final Assessment Report West Kowloon to Tuen Mun Centre. # Updated information provided by MTRC. ## Based on on-site noise measurements conducted for this EIA Study. Please refer to Appendix 5.19 for the details.		

Prediction and Evaluation of Rail Noise Impacts

5.9.9 The predicted air-borne noise levels from WRL and LRT at the representative NSRs are presented in **Table 5.34**, with details provided in [Appendix 5.21](#). Exceedance of rail noise impact was predicted at NAPs P1_RN01 and P1_RN05 to P1_RN07 (approximately 236 dwellings, assuming 1 NAP represents 2 dwellings per floor) during night-time. Mitigation measures will be required.

Table 5.34 Predicted Rail Noise Impact at Representative NSRs (Unmitigated)

NSR/ NAP	Descriptions	Unit of Criteria	Daytime/ Evening Period (0700-2300)		Night-time Period (2300-0700)	
			Criteria	Impact	Criteria	Impact
P1/ P1_RN01	Block 1, San Hing Road Site	Leq (30 min) dB(A)	65	57-59	55	56-58
		L _{max} dB(A)	-	-	85	77-80
P1/ P1_RN02	Block 1, San Hing Road Site	Leq (30 min) dB(A)	65	51-52	55	50-52
		L _{max} dB(A)	-	-	85	75-76
P1/ P1_RN03	Block 1, San Hing Road Site	Leq (30 min) dB(A)	70	57-58	60	56-58
		L _{max} dB(A)	-	-	85	76-79
P1/ P1_RN04	Block 1, San Hing Road Site	Leq (30 min) dB(A)	70	59-60	60	58-59
		L _{max} dB(A)	-	-	85	77-80
P1/ P1_RN05	Block 1, San Hing Road Site	Leq (30 min) dB(A)	70	61-63	60	60-62
		L _{max} dB(A)	-	-	85	77-81
P1/ P1_RN06	Block 1, San Hing Road Site	Leq (30 min) dB(A)	70	61-63	60	60-62
		L _{max} dB(A)	-	-	85	78-82
P1/ P1_RN07	Block 1, San Hing Road Site	Leq (30 min) dB(A)	70	62-63	60	60-62
		L _{max} dB(A)	-	-	85	77-81
P2/ P2_RN01		Leq (30 min) dB(A)	65	48-55	55	47-54

Appendix 4.3

Details of Derivation of Model Inputs

Conversion from SEL_{25m} of TML and LRT for CadnaA Input, Leq(30min)

	SEL _{25m} [*]	Rail Deterioration Correction	Train Frequency per 30 minutes (Day & Evening time / Night-time)	Train Frequency Correction ^ (Day & Evening time / Night-time)	Time Correction for Leq (30min)	Façade Correction	Number of cars Correction %	Leq (30min) adopted for CadnaA (Day & Evening time / Night-time)
TML Northbound	81.4	+3 dB(A)	14 / 10	+11.5 dB(A) / +10.0 dB(A)	-32.6 dB(A)	+2.5 dB(A)	+ 0.5 dB(A)	66.3 dB(A) / 64.9 dB(A)
TML Southbound	80.7		14 / 10					65.6 dB(A) / 64.3 dB(A)
TML Structure-reradiated Noise for non-enclosed viaduct structure	62.8	-	28 / 20	+14.5 dB(A) / +13.0 dB(A)				47.7 dB(A) / 46.4 dB(A)
TML Structure-reradiated Noise for enclosed viaduct	67.0	-	28 / 20					51.9 dB(A) / 50.6 dB(A)
LRT Segment LN4	78.9	+3 dB(A)	14 / 16	+11.5 dB(A) / +12.0 dB(A)			-	63.3 dB(A) / 63.9 dB(A)
LRT Segment LN5	82.9		14 / 16					67.3 dB(A) / 67.9 dB(A)
LRT Segment LN6 - LN8	78.2		14 / 16					62.6 dB(A) / 63.2 dB(A)
LRT Segment LN9 – LN15	80.9		14 / 16					65.3 dB(A) / 65.9 dB(A)
LRT Segment LS4	75.7		14 / 16	+11.5 dB(A) / +12.0 dB(A)				60.1 dB(A) / 60.7 dB(A)
LRT Segment LS5	77.4		14 / 16					61.8 dB(A) / 62.4 dB(A)
LRT Segment LS 6 - LS 8	72.8		14 / 16					57.2 dB(A) / 57.8 dB(A)
LRT Segment LS 9 – LS 15	78.5		14 / 16					62.9 dB(A) / 63.5 dB(A)
LRT Structure-reradiated Noise for non-enclosed viaduct	60.5	-	27 / 31	+14.3 dB(A) / +14.9 dB(A)				45.0 dB(A) / 45.2 dB(A)

Conversion from SEL_{25m} of TML and LRT for CadnaA Input ,Leq(24hr)

	SEL _{25m} [*]	Rail Deterioration Correction	Train Frequency (24hr)	Train Frequency Correction [^] (24hr)	Time Correction for Leq (24hr)	Façade Correction	Number of cars Correction [%]	Leq (24hr) adopted for CadnaA		
TML Northbound	81.4	+3 dB(A)	260	+24.1 dB(A)	-49.4 dB(A)	+2.5 dB(A)	+ 0.5 dB(A)	62.1 dB(A)		
TML Southbound	80.7		260	+24.1 dB(A)				61.4 dB(A)		
TML Structure-reradiated Noise for non-enclosed viaduct structure	62.8	-	520	+27.2 dB(A)				43.6 dB(A)		
TML Structure-reradiated Noise for enclosed viaduct	67.0	-	520					47.8 dB(A)		
LRT Segment LN4	78.9	+3 dB(A)	382	+25.8 dB(A)			-49.4 dB(A)	+2.5 dB(A)	-	60.8 dB(A)
LRT Segment LN5	82.9		382							64.8 dB(A)
LRT Segment LN6 - LN8	78.2		382							60.1 dB(A)
LRT Segment LN9 – LN15	80.9		382							62.8 dB(A)
LRT Segment LS4	75.7		382							57.6 dB(A)
LRT Segment LS5	77.4		382							59.3 dB(A)
LRT Segment LS 6 - LS 8	72.8		382							54.7 dB(A)
LRT Segment LS 9 – LS 15	78.5		382							60.4 dB(A)
LRT Structure-reradiated Noise for non-enclosed viaduct	60.5	-	764	+28.8 dB(A)						42.4 dB(A)

* For TML, the source term information is based on the Approved EIA report for Development at San Hing Road and Hong Po Road, Tuen Mun (AEIAR-227/2020), For LRT, the source term information is based on the Approved EA report for Approved Rezoning Application

^ Train Frequency Correction = $10 \cdot \log(\text{Train Frequency})$

% Number of Cars Correction = $10 \cdot \log(\text{Maximum Train Cars (9)} \text{ according to the latest TML Environmental Permit / Reference Number of Train Cars (8)})$

Appendix 4.4

Predicted Railway Noise Impact Assessment Result (Base Case Scenario)

Proposed Residential Development at Lot Nos. 531 RP, 532 S.D RP and 532 RP in D.D. 130 and Adjoining Government Land, Lam Tei, Tuen Mun
Predicted Leq(30mins) during Day & Evening Time Period, dB(A) - Base Case

Tower 1

Floor	mPD	R1-01	R1-03	R1-04	R1-06	R1-08	R1-09	R1-10	R1-46	R1-47	R1-49	R1-50	R1-52	R1-53	R1-55	R1-56	R1-58	R1-59	R1-60	R1-61	R1-63	R1-64
3/F	23.6	58	57	57	56	54	54	53	57	56	57	57	57	57	--	--	--	--	--	--	--	--
4/F	26.6	58	57	58	56	54	54	53	58	57	58	58	58	58	58	58	57	56	56	57	59	59
5/F	29.6	58	57	57	56	54	54	53	57	57	58	57	58	57	58	58	57	56	56	57	58	58
6/F	32.5	57	56	57	55	53	53	53	57	57	58	57	57	57	57	57	56	56	56	56	57	57
7/F	35.5	56	56	56	55	53	53	53	57	57	57	57	57	57	57	57	55	55	55	55	57	57
8/F	38.5	56	55	55	54	53	53	53	58	57	57	57	57	56	56	56	54	54	54	55	56	56
9/F	41.5	55	55	55	54	53	53	53	58	57	57	57	56	56	56	56	54	54	54	54	56	56
10/F	44.4	55	54	55	54	52	53	53	58	58	57	57	56	56	56	56	53	53	53	54	55	55
11/F	47.4	55	54	55	53	52	53	53	58	58	57	57	56	56	56	56	53	53	53	54	55	55
12/F	50.4	55	54	55	53	52	53	53	58	58	57	57	56	56	56	56	53	53	53	54	55	55
13/F	53.4	55	54	55	53	53	53	53	59	58	57	57	57	56	56	56	53	53	53	54	56	56
14/F	56.3	55	54	55	54	53	53	53	59	58	58	57	57	56	56	56	53	52	53	54	56	56
15/F	59.3	56	54	55	54	53	53	53	59	58	58	57	57	57	57	56	53	52	53	54	56	56
16/F	62.3	56	55	55	54	53	53	53	59	58	58	57	57	57	57	57	53	53	53	54	56	56
17/F	65.3	56	55	55	54	53	53	53	59	58	58	58	58	57	57	57	53	53	53	55	57	57
18/F	68.2	57	55	56	54	53	53	53	59	58	58	58	58	57	58	58	54	53	53	55	57	57
19/F	71.2	57	56	56	54	53	54	54	59	58	59	58	58	58	58	58	54	53	54	56	58	58
Max		58	57	58	56	54	54	54	59	58	59	58	58	58	58	58	56	56	56	57	59	59
Noise Criteria		65			70						65											

Notes:

71/66	Noise level exceed standard of 70/65dB(A)
--	Not Available at this residential storey

Proposed Residential Development at Lot Nos. 531 RP, 532 S.D RP and 532 RP in D.D. 130 and Adjoining Government Land, Lam Tei, Tuen Mun
Predicted Leq(30mins) during Night Time Period, dB(A) - Base Case

Tower 1

Floor	mPD	R1-01	R1-03	R1-04	R1-06	R1-08	R1-09	R1-10	R1-46	R1-47	R1-49	R1-50	R1-52	R1-53	R1-55	R1-56	R1-58	R1-59	R1-60	R1-61	R1-63	R1-64
3/F	23.6	57	56	56	55	53	53	53	57	56	56	56	56	56	--	--	--	--	--	--	--	--
4/F	26.6	57	56	57	56	53	53	53	57	56	57	57	57	57	57	57	56	56	56	56	58	58
5/F	29.6	57	56	56	55	53	53	53	56	56	57	57	57	56	57	57	56	55	55	56	57	57
6/F	32.5	56	55	56	55	53	53	52	56	56	57	56	56	56	56	56	55	55	55	55	56	56
7/F	35.5	55	55	55	54	52	53	52	56	56	56	56	56	56	56	56	54	54	54	55	56	56
8/F	38.5	55	54	54	53	52	52	52	57	56	56	56	56	55	55	55	54	54	54	54	55	55
9/F	41.5	55	54	54	53	52	52	52	57	56	56	56	55	55	55	55	53	53	53	54	55	55
10/F	44.4	54	54	54	53	52	52	52	57	56	56	56	55	55	55	55	53	53	53	53	55	55
11/F	47.4	54	54	54	53	52	52	52	57	57	56	56	56	55	55	55	53	52	53	53	55	55
12/F	50.4	55	54	54	53	52	52	52	57	57	56	56	56	55	55	55	52	52	52	53	55	55
13/F	53.4	55	54	54	53	52	52	52	57	57	57	56	56	56	55	55	52	52	52	53	55	55
14/F	56.3	55	54	54	53	52	52	52	58	57	57	56	56	56	56	56	53	52	52	54	55	55
15/F	59.3	55	54	55	53	52	52	52	58	57	57	56	56	56	56	56	53	52	52	54	56	56
16/F	62.3	56	54	55	54	53	53	53	58	57	57	57	57	56	57	56	53	52	53	54	56	56
17/F	65.3	56	55	55	54	53	53	53	58	57	57	57	57	57	57	57	53	53	53	55	57	57
18/F	68.2	57	55	56	54	53	53	53	58	57	58	57	57	57	58	58	54	53	53	55	57	57
19/F	71.2	57	56	56	54	53	53	53	58	57	58	58	58	57	58	58	54	53	54	56	58	58
Max		57	56	57	56	53	53	53	58	57	58	58	58	57	58	58	55	55	56	56	58	58
Noise Criteria		55			60						55											

Notes:

61/56	Noise level exceed standard of 60/55dB(A)
--	Not Available at this residential storey

Proposed Residential Development at Lot Nos. 531 RP, 532 S.D RP and 532 RP in D.D. 130 and Adjoining Government Land, Lam Tei, Tuen Mun
Predicted Leq(24hr), dB(A) - Base Case

Tower 1

Floor	mPD	R1-01	R1-03	R1-04	R1-06	R1-08	R1-09	R1-10	R1-46	R1-47	R1-49	R1-50	R1-52	R1-53	R1-55	R1-56	R1-58	R1-59	R1-60	R1-61	R1-63	R1-64
3/F	23.6	54	53	53	52	50	50	50	54	53	53	53	53	53	--	--	--	--	--	--	--	--
4/F	26.6	54	54	54	53	50	50	50	54	53	54	54	54	54	55	55	53	53	53	53	55	55
5/F	29.6	54	53	53	52	50	50	50	53	53	54	54	54	54	54	54	53	52	52	53	54	54
6/F	32.5	53	53	53	52	50	50	50	53	53	54	53	54	53	54	54	52	52	52	52	54	54
7/F	35.5	52	52	52	51	50	50	49	53	53	53	53	53	53	53	53	51	51	51	52	53	53
8/F	38.5	52	51	52	51	49	49	49	54	53	53	53	53	53	52	52	51	51	51	51	52	52
9/F	41.5	52	51	51	50	49	49	49	54	53	53	53	53	52	52	52	50	50	50	51	52	52
10/F	44.4	52	51	51	50	49	49	49	54	54	53	53	53	52	52	52	50	50	50	51	52	52
11/F	47.4	52	51	51	50	49	49	49	54	54	53	53	53	52	52	52	50	50	50	50	52	52
12/F	50.4	52	51	51	50	49	49	49	54	54	54	53	53	53	52	52	50	49	50	50	52	52
13/F	53.4	52	51	51	50	49	49	49	55	54	54	53	53	53	53	52	49	49	49	50	52	52
14/F	56.3	52	51	51	50	49	49	49	55	54	54	53	53	53	53	53	50	49	49	51	52	52
15/F	59.3	52	51	52	50	49	49	49	55	54	54	53	53	53	53	53	50	49	49	51	53	53
16/F	62.3	53	51	52	51	50	50	50	55	54	54	54	54	53	54	53	50	49	50	51	53	53
17/F	65.3	53	52	52	51	50	50	50	55	54	55	54	54	54	54	54	50	50	50	52	54	54
18/F	68.2	54	52	53	51	50	50	50	55	54	55	54	54	54	55	55	51	50	50	52	54	54
19/F	71.2	54	53	53	51	50	50	50	55	55	55	55	55	54	55	55	51	50	51	53	55	55
Max		54	54	54	53	50	50	50	55	55	55	55	55	54	55	55	52	52	53	53	55	55
Noise Criteria		65																				

Notes:

66	Noise level exceed standard of 65dB(A)
--	Not Available at this residential storey

Proposed Residential Development at Lot Nos. 531 RP, 532 S.D RP and 532 RP in D.D. 130 and Adjoining Government Land, Lam Tei, Tuen Mun

Predicted Lmax, dB(A) -Base Case

Tower 1

Floor	mPD	R1-01	R1-03	R1-04	R1-06	R1-08	R1-09	R1-10	R1-46	R1-47	R1-49	R1-50	R1-52	R1-53	R1-55	R1-56	R1-58	R1-59	R1-60	R1-61	R1-63	R1-64
3/F	23.6	83	83	84	84	84	84	84	82	83	84	84	84	84	--	--	--	--	--	--	--	--
4/F	26.6	83	83	83	84	84	84	84	82	83	84	84	84	84	84	84	84	84	84	84	84	84
5/F	29.6	83	83	83	84	84	84	83	82	82	84	84	84	84	84	84	84	84	84	84	84	84
6/F	32.5	83	83	83	83	83	83	83	82	82	84	84	84	84	84	84	84	84	84	83	84	83
7/F	35.5	83	83	83	83	83	83	83	82	82	83	83	84	84	84	84	84	83	83	83	83	83
8/F	38.5	83	83	83	83	83	83	83	82	82	83	83	83	83	83	83	83	83	83	83	83	83
9/F	41.5	82	82	83	83	83	83	83	81	82	83	83	83	83	83	83	83	83	83	83	83	83
10/F	44.4	82	82	82	83	83	83	83	81	81	83	83	83	83	83	83	83	83	83	83	83	83
11/F	47.4	82	82	82	82	83	82	82	81	81	83	83	83	83	83	83	83	83	83	82	83	83
12/F	50.4	82	82	82	82	82	82	82	81	81	82	82	82	82	83	83	82	82	82	82	82	82
13/F	53.4	82	82	82	82	82	82	82	81	81	82	82	82	82	82	82	82	82	82	82	82	82
14/F	56.3	82	82	82	82	82	82	82	81	81	82	82	82	82	82	82	82	82	82	82	82	82
15/F	59.3	82	82	82	82	82	82	82	80	81	82	82	82	82	82	82	82	82	82	82	82	82
16/F	62.3	82	82	82	82	82	82	81	80	80	82	82	82	82	82	82	82	82	82	82	82	82
17/F	65.3	82	82	82	82	82	81	81	80	80	82	82	82	82	82	82	82	82	82	82	82	82
18/F	68.2	81	81	82	82	81	81	81	80	80	81	81	82	81	82	82	82	81	81	82	82	82
19/F	71.2	81	81	81	81	81	81	81	80	80	81	81	81	81	82	82	81	81	81	81	81	81
Max		83	83	84	84	84	84	84	82	83	84	84	84	84	84	84	84	84	84	84	84	84
Noise Criteria		85																				

Notes:

86	Noise level exceed standard of 86 dB(A)
--	Not Available at this residential storey
	Acoustic Window (Baffle Type) [Assumed 3dB(A) Sound Attenuation at the Noise Assessment Point]
	Enhanced Acoustic Balcony (Baffle Type) [Assumed 3dB(A) Sound Attenuation at the Noise Assessment Point]

Appendix 4.5

Predicted Railway Noise Impact Assessment Result (Mitigated Case Scenario)

Proposed Residential Development at Lot Nos. 531 RP, 532 S.D RP and 532 RP in D.D. 130 and Adjoining Government Land, Lam Tei, Tuen Mun

Predicted Lmax, dB(A) - Base Case

Tower 1

Floor	mPD	R1-01	R1-03	R1-04	R1-06	R1-08	R1-09	R1-10	R1-46	R1-47	R1-49	R1-50	R1-52	R1-53	R1-55	R1-56	R1-58	R1-59	R1-60	R1-61	R1-63	R1-64
3/F	23.6	54	53	53	55	53	53	53	57	56	53	53	53	53	--	--	--	--	--	--	--	--
4/F	26.6	54	53	54	56	53	53	53	57	56	54	54	54	54	54	54	53	53	53	53	55	55
5/F	29.6	54	53	53	55	53	53	53	56	56	54	54	54	53	54	54	53	55	55	53	54	54
6/F	32.5	53	55	53	55	53	53	52	56	56	54	53	53	53	53	53	55	55	55	55	53	53
7/F	35.5	55	55	55	54	52	53	52	56	56	53	53	53	53	53	53	54	54	54	55	53	53
8/F	38.5	55	54	54	53	52	52	52	57	56	53	53	53	55	55	55	54	54	54	54	55	55
9/F	41.5	55	54	54	53	52	52	52	57	56	53	53	55	55	55	55	53	53	53	54	55	55
10/F	44.4	54	54	54	53	52	52	52	57	56	53	53	55	55	55	55	53	53	53	53	55	55
11/F	47.4	54	54	54	53	52	52	52	57	57	53	53	53	55	55	55	53	52	53	53	55	55
12/F	50.4	55	54	54	53	52	52	52	57	57	53	53	53	55	55	55	52	52	52	53	55	55
13/F	53.4	55	54	54	53	52	52	52	57	57	54	53	53	53	55	55	52	52	52	53	55	55
14/F	56.3	55	54	54	53	52	52	52	58	57	54	53	53	53	53	53	53	52	52	54	55	55
15/F	59.3	55	54	55	53	52	52	52	58	57	54	53	53	53	53	53	53	52	52	54	53	53
16/F	62.3	53	54	55	54	53	53	53	58	57	54	54	54	53	54	53	53	52	53	54	53	53
17/F	65.3	53	55	55	54	53	53	53	58	57	54	54	54	54	54	54	53	53	53	55	54	54
18/F	68.2	54	55	53	54	53	53	53	58	57	55	54	54	54	55	55	54	53	53	55	54	54
19/F	71.2	54	53	53	54	53	53	53	58	57	55	55	55	54	55	55	54	53	54	53	55	55
Max		55	55	55	56	53	53	53	58	57	55	55	55	55	55	55	55	55	55	55	55	55
Noise Criteria		55			60						55											

Notes:

61/56	Noise level exceed standard of 60/55dB(A)
--	Not Available at this residential storey
	Acoustic Window (Baffle Type) [Assumed 3dB(A) Sound Attenuation at the Noise Assessment Point]
	Enhanced Acoustic Balcony (Baffle Type) [Assumed 3dB(A) Sound Attenuation at the Noise Assessment Point]

Appendix 4.6

Proposed Railway Noise Mitigation Measures Schedule

Schedule of Railway Noise Mitigation Measures

Tower 1

NSRs	Unit	Room	Floor	Noise Mitigation Measures
R1-01	A1	LIV	3/F-6/F, 16/F-19/F	Enhanced Acoustic Balcony (Baffle Type)
-	A1	LIV	3/F-19/F	Fixed Glazing with Maintenance Window
R1-03	A1	MBR	3/F-5/F, 19/F	Acoustic Window (Baffle Type)
R1-04	A2	LIV	3/F-6/F, 18/F-19/F	Enhanced Acoustic Balcony (Baffle Type)
-	A2	MBR	3/F-19/F	Fixed Glazing with Maintenance Window
-	B2	LIV	3/F-19/F	Fixed Glazing with Maintenance Window
-	B2	MBR	3/F-19/F	Fixed Glazing with Maintenance Window
R1-49	B2	MBR	3/F-19/F	Acoustic Window (Baffle Type)
R1-50	B1	BR	3/F-19/F	Acoustic Window (Baffle Type)
-	B1	LIV	3/F-19/F	Fixed Glazing with Maintenance Window
R1-52	B1	LIV	3/F-8/F, 11/F-19/F	Enhanced Acoustic Balcony (Baffle Type)
R1-53	B1	MBR	3/F-7/F, 13/F-19/F	Acoustic Window (Baffle Type)
-	B10	BR	4/F-19/F	Fixed Glazing with Maintenance Window
R1-55	B10	BR	4/F-7/F, 14/F-19/F	Acoustic Window (Baffle Type)
R1-56	B10	LIV	4/F-7/F, 14/F-19/F	Enhanced Acoustic Balcony (Baffle Type)
-	B10	LIV	4/F-19/F	Fixed Glazing with Maintenance Window
R1-58	B9	BR	4/F-5/F	Acoustic Window (Baffle Type)
R1-59	B9	LIV	4/F	Enhanced Acoustic Balcony (Baffle Type)
	B9	LIV	4/F-19/F	Fixed Glazing with Maintenance Window
	A9	LIV	4/F-19/F	Fixed Glazing with Maintenance Window
R1-60	A9	BR	4/F	Enhanced Acoustic Balcony (Baffle Type)
R1-61	A9	BR	4/F-5/F, 19/F	Acoustic Window (Baffle Type)
-	A10	LIV	4/F-19/F	Fixed Glazing with Maintenance Window
R1-63	A10	LIV	4/F-7/F, 15/F-19/F	Enhanced Acoustic Balcony (Baffle Type)
R1-64	A10	BR	4/F-7/F, 15/F-19/F	Acoustic Window (Baffle Type)
-	A10	BR	4/F-19/F	Fixed Glazing with Maintenance Window

Appendix 5.1

Information Extracted from Approved EA report for Approved Rezoning Application (Application No.: Y/TM-LTYT/11)

Table 3.2 Identified Fixed Noise Sources during Site Visits

ID	Name and Photo	Description
S1 & S1a	天龍/偉光 (Tin Lung and Wai Kwong) 	S1 & S1a is a car repairing workshop. As advised by the operator during site survey, its operation is from 0900 to 1800. There is no night-time operation. S1 is the location where car repairing is conducted. Car repairing noise includes tyre pumping and car cleansing. Not all the activities were carried at the time of the site visit. Thus, the SPL of some of the activities were reference from similar operation in previously approved planning application. Noise from tyre pumping has made reference to an approved planning application A/YL-KTN/501^(a). The measured SPL was 75.1dB(A) at 2m from noise source and hence the SWL is <u>89.1 dB(A)</u>. With reference to the approved planning application Y/TM-LTTY/9, noise from car cleansing was measured onsite with SPL of 59.3 dB(A) at 5m from the noise source and hence the SWL is <u>81.3 dB(A)</u>.
S2	御浚 (Royal's Motor Engineering Company Limited) 	S2 is a car repairing workshop. As advised by the operator during site survey, its operation is from 1000 to 1900. There is no night-time operation. Car repairing noise includes pneumatic screwdriver, hammering and tyre pumping are considered. During the site visits, no noisy activity was observed. As a conservative approach, noise from the car repairing activities has made reference to an approved planning application A/YL-KTN/501^(a). Therefore, the overall SWL adopted at S3 is <u>98.3 dB(A)</u>.
S3	CHEP	S5 is a covered storage for pallet. As advised by the operator during site survey, its operation is from 0900 to 1800. There is no night-time operation. The noisy industrial activity is loading / unloading of pallet using forklift. With reference to the approved planning

ID	Name and Photo	Description
		application Y/TM-LTTY/9, the onsite measured SPL was 66.0 dB(A) at 8m and hence the SWL is <u>92.1 dB(A)</u> .
S4	捷興汽車(Jit Hing) 	S6 is a covered car repairing workshop. As advised by the operator during site survey, its operation is from 0900 to 2000. There is no night-time operation. This car repairing workshop will be resumed for public housing development at San Hing Road under CEDD's contract B764CL before population intake at the Proposed Development. Hence, this noise source is not included in the assessment.
S5	高田 (Ko Tin) 	S7 is an open storage site for dumped electronic appliance. This open storage site will be resumed for public housing development at San Hing Road under CEDD's contract B764CL before population intake at the Proposed Development. Hence, this noise source is not included in the assessment.
S6	Ice Manufacturing Factory (德保雪粒) to the southeast of the site 	S8 is an ice manufacturing factory. As advised by the operators, their working hours is from 0900 to 1900. The major noisy activity is the loading and unloading activities. This factory will be resumed for public housing development at San Hing Road under CEDD's contract B764CL before population intake at the Proposed Development. Hence, this noise source is not included in the assessment.
S7	Ice Manufacturing Factory (德保雪粒) to the southeast of the Application Site	As advised by the operators, their working hours is from 0900 to 1900. The Major noisy activity is the operation of the air-cooling chiller. There is no breakthrough noise observed.

ID	Name and Photo	Description
		This factory will be resumed for public housing development at San Hing Road under CEDD's contract B764CL before population intake at the Proposed Development. Hence, this noise source is not included in the assessment.
S8	Enclosed Storage (Long United Furniture Limited) to the southeast of the site 	The storage is totally enclosed. As advised by the operators, their working hours is from 0900 to 1800. The noisy industrial activities are the loading / unloading of goods and movement of vehicles. No tonal character activities as well as impulsiveness characteristic activities are observed. This storage facility will be resumed for public housing development at San Hing Road under CEDD's contract B764CL before population intake at the Proposed Development. Hence, this noise source is not included in the assessment.

Note:

(a) SWL of a vehicle repair workshop is referenced to a similar one with several standard activities in an approved planning application (Application No. A/YL-KTN/501). The equipment involved in the activities include pneumatic screwdriver and tyre pump.

(b) All of the noise sources have no tonal or impulsiveness characteristics.

- 3.3.3 Out of the 8 noise sources identified, 5 of them (S4 to S8) will be resumed for public housing development at San Hing Road under CEDD's contract B764CL before population intake at the Proposed Development. Hence, these noise sources are not included for assessment.

Planned Fixed Noise Sources

- 3.3.4 Mechanical ventilation system would be provided for the proposed clubhouse and the on-site underground sewage treatment plant. The ventilation equipment and plant room louvres would be designed to face away from noise sensitive receivers along Ng Lau Road as far as practicable. The design of any fixed noise source will comply with the noise standards stipulated in Chapter 9 of the HKPSG and the Noise Control Ordinance. However, as the Proposed Development is still at an early stage, the proposed location and design of the planned fixed noise source as well as the required mitigation measures (if any) are subject to further study during the detailed design stage.
- 3.3.5 With conformed design and provision of adequate mitigation measures, if required, for any planned fixed noise sources, the noise standards stipulated in Chapter 9 of HKPSG and NCO should be complied, no adverse noise impact is anticipated from the planned fixed noise sources.

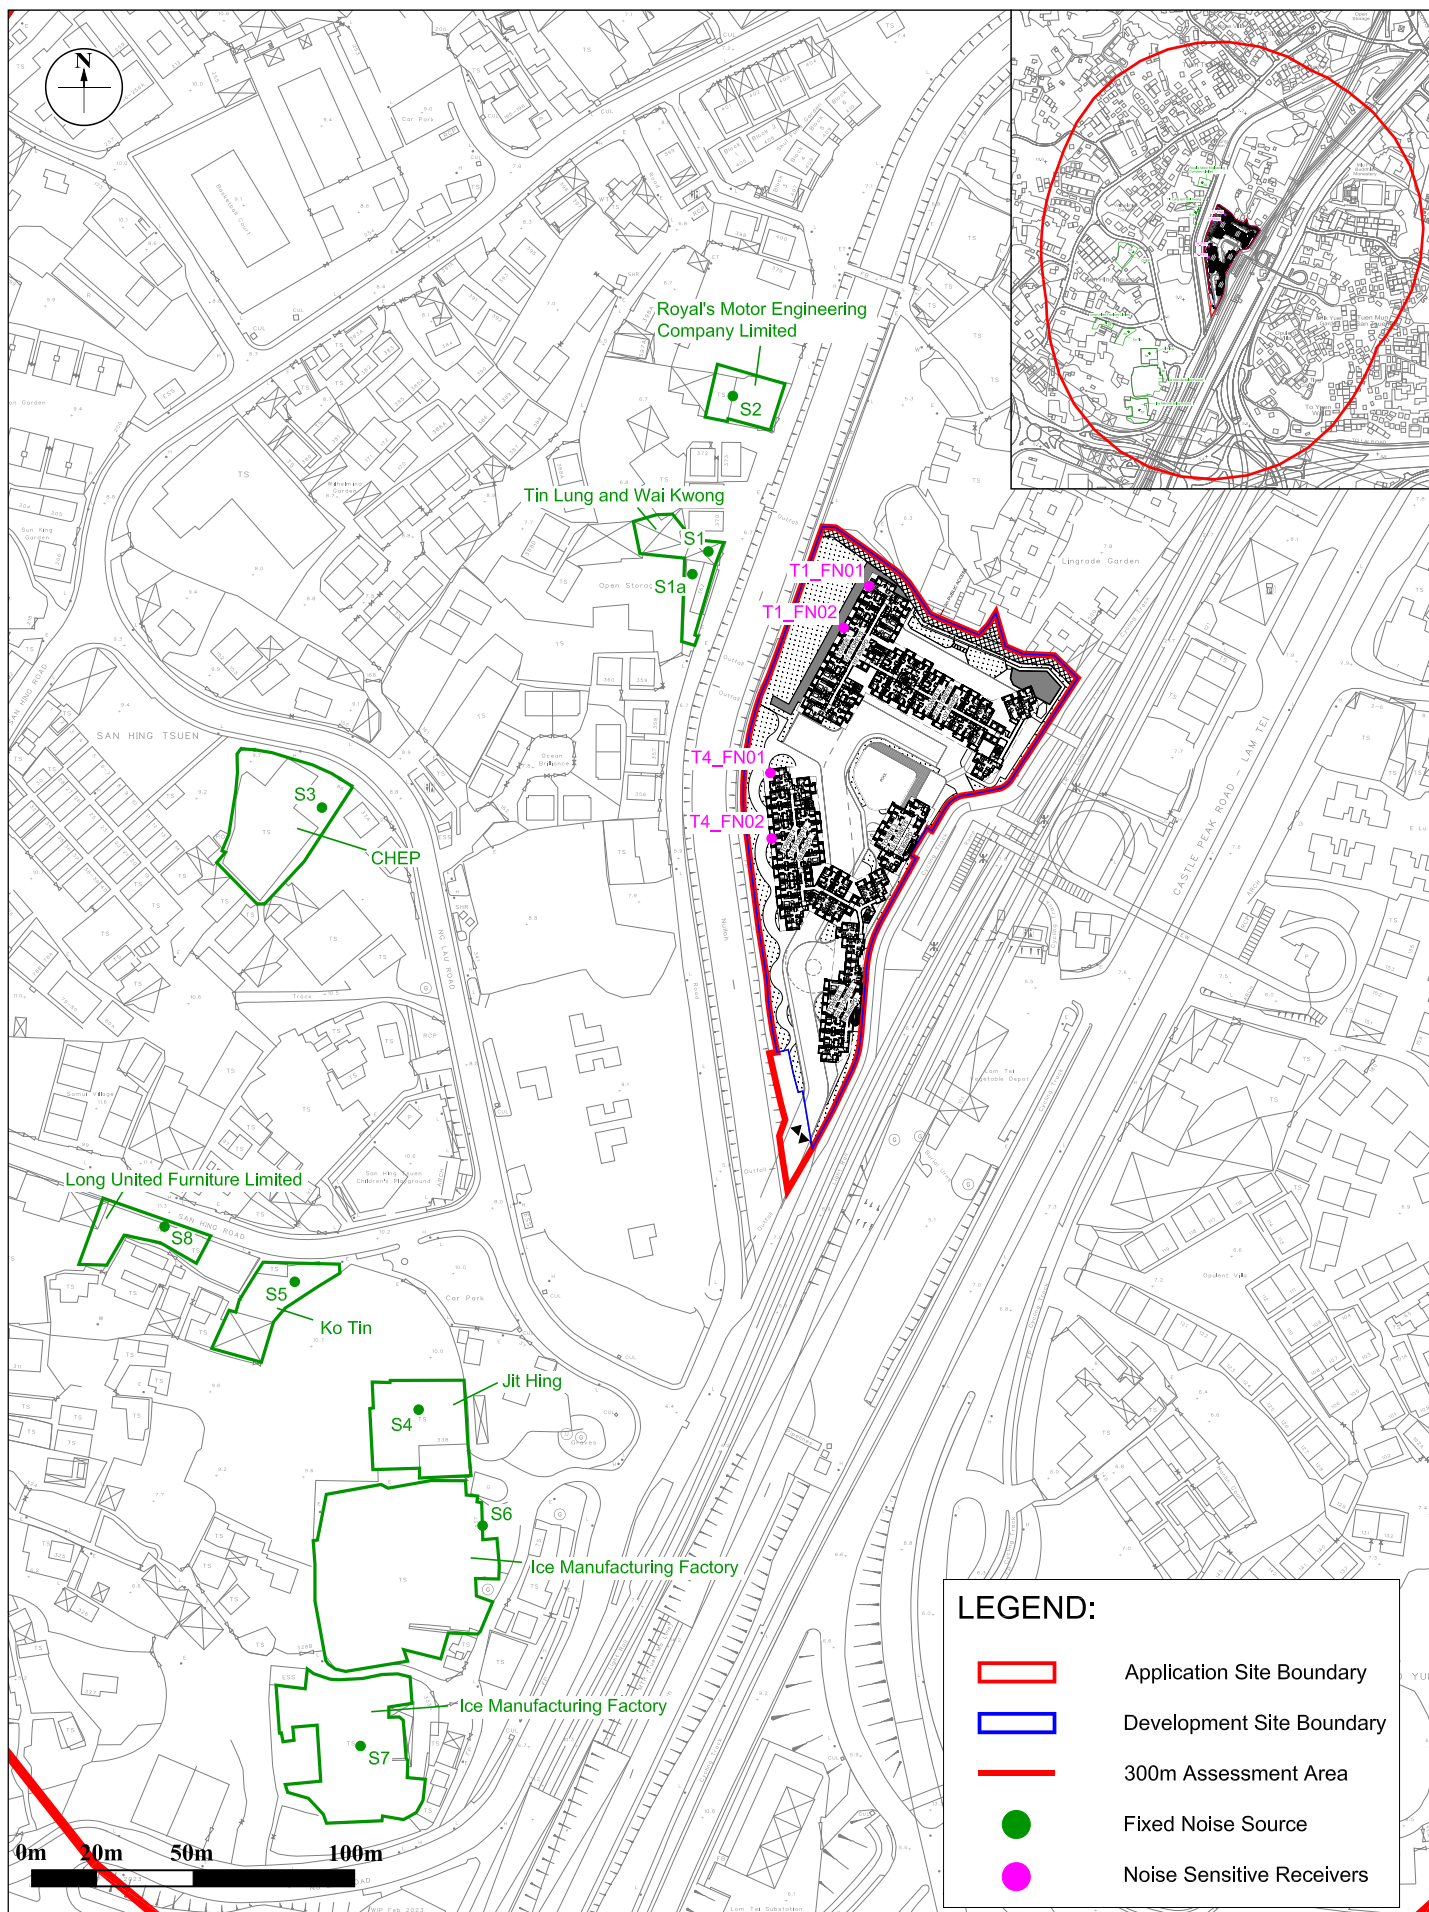


Figure: 3.1

Title: Location of Fixed Noise Sources and Representative Noise Sensitive Receivers for Fixed Noise Impact Assessment

Project: Proposed Rezoning from "Residential (Group B)1" Zone to "Residential (Group B)4" Zone for Medium-Density Housing Development to Include a Footpath for Public use at Various Lots and Adjacent Government Land in DD130, Lam Tei, Tuen Mun

RAMBOLL

Drawn by: EC

Checked by: KY

Rev.: 5.0

Date: Nov 2024

Appendix 5.2

On-Site Survey for Verification of Fixed Noise Sources

Appendix 5.2 – On-Site Survey for Verification of Fixed Noise Sources

31 October 2025 Day Time Survey

	
1. Tin Lung and Wai Kwong – A car repairing workshop. Car repairing equipment for tyre pumping and car cleansing were observed. No noisy activity was observed during the site survey. (S1 & S1a)	2. Royal's Motors Engineering Company Limited (御浚) – A car repairing workshop. The workshop is fenced off during site survey. No noisy activity was observed. (S2)
	
3. 新法 – A storage warehouse for the storage of metal pipes was observed during site survey. The storage warehouse is assumed to be used for material storage, loading and unloading activity. No noisy activity was observed during site survey. (S3)	



Appendix: 5.2

Title: Site Survey Record for Verification of Fixed Noise Sources

Project: S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for The Proposed Residential Development (Flat) with Shop and Services Use at Lots. 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei, Tuen Mun

RAMBOLL

Drawn by: MK

Checked by: BF

Rev.: 1.0

Date: Nov 2025

Appendix 5.3

Detailed Fixed Noise Impact Assessment

S16 Planning Application Proposed Minor Relaxation of Plot Ratio and Building Height Restrictions for the Proposed Residential Development (Flat) with Shop and Services Use at Lots 531 RP, 532 S.D. RP and 532 RP in DD 130 and the Adjoining Government Land, Lam Tei Tuen Mun

NSR ID	NSR (x)	NSR (y)	Noise Source	Description	Noise Source (x)	Noise Source (y)	SWL (dB(A))	Shortest Horizontal Distance from receiver to source (m) to the noise source	Distance Correction dB(A)	Barrier Correction dB(A)	Tonality dB(A)	Façade Correction dB(A)	Corrected Noise Level dB(A)
F1-01	816154.1	830929.2	S1	Tin Lung and Wai Kwong	816090.6	831141.3	89.8	221	54.9	0	0	3	38
			S1a	Tin Lung and Wai Kwong	816085.6	831134.2	87.9	216	54.7	0	0	3	36
			S2	Royal's Motor Engineering Company Limited	816098.2	831189.5	98.3	266	56.5	0	0	3	45
			S3	CHEP	815970.6	831061.8	92.1	226	55.1	0	0	3	40
												Total	47
												Criteria	65

NSR ID	NSR (x)	NSR (y)	Noise Source	Description	Noise Source (x)	Noise Source (y)	SWL (dB(A))	Shortest Horizontal Distance from receiver to source (m) to the noise source	Distance Correction dB(A)	Barrier Correction dB(A)	Tonality dB(A)	Façade Correction dB(A)	Corrected Noise Level dB(A)
F1-02	816150.1	830922.8	S1	Tin Lung and Wai Kwong	816090.6	831141.3	89.8	226	55.1	0	0	3	38
			S1a	Tin Lung and Wai Kwong	816085.6	831134.2	87.9	221	54.9	0	0	3	36
			S2	Royal's Motor Engineering Company Limited	816098.2	831189.5	98.3	272	56.7	0	0	3	45
			S3	CHEP	815970.6	831061.8	92.1	227	55.1	0	0	3	40
												Total	47
												Criteria	65

Appendix 6.1

Proposed Overall Noise Mitigation Measures Schedule

Schedule of Overall Noise Mitigation Measures

Tower 1

NSRs	Unit	Room	Floor	Noise Mitigation Measures
N1-01	A1	LIV	3/F-6/F, 16/F-19/F	Enhanced Acoustic Balcony (Baffle Type)
N1-02	A1	LIV	3/F-19/F	Fixed Glazing with Maintenance Window
N1-03	A1	BR	3/F-5/F, 19/F	Acoustic Window (Baffle Type)
N1-04	A2	LIV	3/F-6/F, 18/F-19/F	Enhanced Acoustic Balcony (Baffle Type)
N1-05	A2	MBR	3/F-19/F	Fixed Glazing with Maintenance Window
N1-06	A2	MBR	3/F-19/F	Acoustic Window (Baffle Type)
N1-07	A2	MBR	3/F-19/F	Fixed Glazing with Maintenance Window
N1-08	A2	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-09	A3	MBR	4/F-19/F	Acoustic Window (Baffle Type)
N1-10	A3	LIV	4/F-19/F	Enhanced Acoustic Balcony (Baffle Type)
N1-11	A3	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-11	A3	BR	3/F-19/F	1.5m Acoustic Fin with Sound Absorption Material
N1-12	A4	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-13	A4	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-14	A4	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-14	A4	BR	3/F-19/F	0.2m Acoustic Fin with Sound Absorption Material
N1-15	A5	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-16	A5	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-17	A5	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-18	A6	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-19	A6	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-20	A6	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-21	A7	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-22	A7	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-23	A7	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-24	A8	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-25	A8	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-26	A8	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-27	B8	BR	4/F-19/F	Acoustic Window (Baffle Type)

Schedule of Overall Noise Mitigation Measures

N1-28	B8	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-29	B8	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-30	B7	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-31	B7	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-32	B7	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-33	B6	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-34	B6	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-35	B6	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-36	B5	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-37	B5	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-38	B5	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-39	B4	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-40	B4	LIV	4/F-19/F	Acoustic Window (Baffle Type)
N1-41	B4	LIV	4/F-19/F	Fixed Glazing with Maintenance Window, Self-Closing Door
N1-42	B3	LIV	4/F-19/F	Enhanced Acoustic Balcony (Baffle Type)
N1-43	B3	LIV	4/F-19/F	Fixed Glazing with Maintenance Window
N1-44	B3	BR	4/F-19/F	Acoustic Window (Baffle Type)
N1-44	B3	BR	3/F-19/F	0.8m Acoustic Fin with Sound Absorption Material
N1-45	B3	MBR	3/F-19/F	Fixed Glazing with Maintenance Window
N1-46	B3	MBR	3/F-19/F	1.5m Acoustic Fin with Sound Absorption Material
N1-46	B3	MBR	3/F-19/F	Acoustic Window (Baffle Type)
N1-47	B2	LIV	4/F-19/F	Enhanced Acoustic Balcony (Baffle Type)
-	B2	LIV	3/F-19/F	Fixed Glazing with Maintenance Window
N1-48	B2	BR	3/F-19/F	Fixed Glazing with Maintenance Window
N1-49	B2	BR	3/F-19/F	Acoustic Window (Baffle Type)
N1-50	B1	BR	3/F-19/F	Acoustic Window (Baffle Type)
N1-51	B1	LIV	3/F-19/F	Fixed Glazing with Maintenance Window
N1-52	B1	LIV	3/F-8/F, 11/F-19/F	Enhanced Acoustic Balcony (Baffle Type)
N1-53	B1	MBR	3/F-7/F, 13/F-19/F	Acoustic Window (Baffle Type)
N1-54	B10	BR	4/F-19/F	Fixed Glazing with Maintenance Window
N1-55	B10	BR	4/F-7/F, 14/F-19/F	Acoustic Window (Baffle Type)
N1-56	B10	LIV	4/F-7/F, 14/F-19/F	Enhanced Acoustic Balcony (Baffle Type)
N1-57	B10	LIV	4/F-19/F	Fixed Glazing with Maintenance Window

Schedule of Overall Noise Mitigation Measures

N1-58	B9	BR	4/F-5/F	Acoustic Window (Baffle Type)
N1-59	B9	LIV	4/F	Enhanced Acoustic Balcony (Baffle Type)
-	B9	LIV	4/F-19/F	Fixed Glazing with Maintenance Window
-	A9	LIV	4/F-19/F	Fixed Glazing with Maintenance Window
N1-60	A9	BR	4/F	Enhanced Acoustic Balcony (Baffle Type)
N1-61	A9	BR	4/F-5/F, 19/F	Acoustic Window (Baffle Type)
N1-62	A10	LIV	4/F-19/F	Fixed Glazing with Maintenance Window
N1-63	A10	LIV	4/F-7/F, 15/F-19/F	Enhanced Acoustic Balcony (Baffle Type)
N1-64	A10	BR	4/F-7/F, 15/F-19/F	Acoustic Window (Baffle Type)
N1-65	A10	BR	4/F-19/F	Fixed Glazing with Maintenance Window
N1-06 to N1-11	A2	-	3/F	1.5m high solid wall at 3/F the flat roof (Please refer to Figure 3.2 for details)
N1-12 to N1-45	A4 to B3	-	3/F	1.5m high solid wall at 3/F the flat roof (Please refer to Figure 3.2 for details)
N1-47 to N1-48	B2	-	3/F	1.5m high solid wall at 3/F the flat roof (Please refer to Figure 3.2 for details)
N1-10 to N1-11	A3	-	3/F-19/F	Sound Absorption Material on Façade (Please refer to Figure 3.2 for details)
N1-13 to N1-16	A4 to A5	-	3/F-19/F	Sound Absorption Material on Façade (Please refer to Figure 3.2 for details)
N1-19 to N1-22	A6 to A7	-	3/F-19/F	Sound Absorption Material on Façade (Please refer to Figure 3.2 for details)
N1-25 to N1-28	A8 to B8	-	3/F-19/F	Sound Absorption Material on Façade (Please refer to Figure 3.2 for details)
N1-31 to N1-34	B7 to B6	-	3/F-19/F	Sound Absorption Material on Façade (Please refer to Figure 3.2 for details)
N1-37 to N1-40	B5 to B4	-	3/F-19/F	Sound Absorption Material on Façade (Please refer to Figure 3.2 for details)
N1-44 to N1-45	B3	-	3/F-19/F	Sound Absorption Material on Façade (Please refer to Figure 3.2 for details)