

Appendix B

Revised Geotechnical Planning Review Report

GEOTECHNICAL PLANNING REVIEW REPORT (GPRR)

FOR

APPLICATION FOR AMENDMENT OF PLAN

UNDER SECTION 12A OF THE TOWN PLANNING ORDINANCE (Cap.131)

TO REZONE THE APPLICATION SITE

FROM “GREEN BELT” AND AREA SHOWN AS “ROAD”

TO “RESIDENTIAL (GROUP C) 5”

FOR

PROPOSED RESIDENTIAL DEVELOPMENT AT

VARIOUS LOTS IN D.D. 210 AND ADJOINING GOVERNMENT LAND

PAK WAI, SAI KUNG

CONTENTS

- 1. Introduction**
- 2. Site Location and Description**
 - 2.1 Site Location
 - 2.2 Existing Features
- 3. The Proposed Development**
- 4. Existing Information**
 - 4.1 Ground Investigation Information
 - 4.2 Layout of Existing Utilities
 - 4.3 Layout of Existing Building Structure
- 5. Ground Conditions**
 - 5.1 Topography
 - 5.2 Geology
 - 5.3 Groundwater Condition
- 6. Proposed Works**
 - 6.1 Proposed Ground Investigation Works
 - 6.2 Proposed Works on Existing Features
 - 6.3 Proposed Works on Natural Terrain
 - 6.4 Proposed Foundation Works
 - 6.5 Proposed Site Formation, Excavation and Lateral Support Works
 - 6.6 Construction Method & Sequence
- 7. Impacts on Adjacent Premises/Geotechnical Features**
- 8. Conclusion**

LIST OF FIGURES

Figure 1	Site Location Plan
Figure 2	Master Layout Plan
Figure 3	Diagramatic Section
Figure 4	Layout plan for Hillside Catchments
Figure 5	Section A-A
Figure 6	Section B-B
Figure 7	Section C-C
Figure 8	Section D-D
Figure 9	Section E-E
Figure 10	Section F-F
Figure 11	Section G-G
Figure 12	Section H-H
Figure 13	Demarcation Plan for Proposed NTHS Study Area

APPENDICES

Appendix A	Information of Existing Slopes/Retaining Walls
Appendix B	Existing Boreholes Information
Appendix C	ENTLI and HLC from GInfo
Appendix D	Geology Map from GInfo
Appendix E	Summary of API

1. **INTRODUCTION**

This report presents the geotechnical planning review for the proposed development based on the available ground information in supplementary to the master layout plans.

The development involved the construction of four blocks of 1 to 4 storey residential building with carparking podium.

The geotechnical review is prepared under the supervision of Registered Geotechnical Engineer, Wong Wai Yi 0151939, in accordance with the requirement set out in PNAP-APP25 (PNAP 78). This report contains the following as listed.

- Impact and proposed investigation to the adjoining premises
- Conclusion and recommendation

2. **SITE LOCATION AND DESCRIPTION**

2.1 Site Location

The captioned site locates in a valley opposing Pak Wai in Sai Kung, The total area of the site is about 12,692m². The elevation of the site is about +4.5 – 7.5mPD. A site location plan is attached in Figure 1.

2.2 Existing Features

According to the Slope Information System, features related to the Site are listed as follow:

1) Features within the Site:

Feature No.	Type	Location	Responsibility	Height	Angle	Length
*7SE-D/C 154	Slope	West	DD210 Lot31 Lands D	4.0 m	40	35 m
*7SE-D/F 46	Slope	West	Lands D	5.0 m	40	35 m
7SE-D/FR 70	(Obsolete feature)					

* Refer to Section 6.2.

2) Features within the scope of 10m from site boundary

Feature No.	Type	Location	Responsibility	Height	Angle	Length
7SE-D/C 153	Slope	West	Lands D	3.5 m	60	75 m
7SE-D/R 54	Wall	East	Lands D	4.4 m	85	30 m
7SE-D/C 171	Slope	East	Lands D	7.1 m	33	52 m

3) Feature attached in the Catchment OH(A2):

Feature No.	Type	Location	Responsibility	Height	Angle	Length
7SE-D/C 163	Slope	West	Lands D	9.0 m	45	45 m

4) Feature attached in the Catchment OH(A3):

Feature No.	Type	Location	Responsibility	Height	Angle	Length
7SE-D/C 163	Slope	West	Lands D	9.0 m	45	45 m

5) Feature attached in the Catchment OH(A4):

Feature No.	Type	Location	Responsibility	Height	Angle	Length
7SE-D/C 370	Slope	West	DD210 Lot 11 Lands D	3.8 m	40	16 m

6) Feature attached in the Catchment OH(B1):

Feature No.	Type	Location	Responsibility	Height	Angle	Length
7SE-D/C 157	Slope	East	Lands D	6.0 m	70	125 m
7SE-D/C 159	Slope	East	Lands D	6.0 m	60	28 m

7) Feature attached in the Catchment OH(B2):

Feature No.	Type	Location	Responsibility	Height	Angle	Length
7SE-D/C 152	Slope	East	Lands D	15.0 m	65	50 m
7SE-D/C 164	Slope	East	Lands D	6.0 m	55	31 m
7SE-D/C 155	Slope	East	Lands D	6.8 m	70	35 m

8) Feature attached in the Catchment CD(2):

Feature No.	Type	Location	Responsibility	Height	Angle	Length
7SE-D/C 152	Slope	East	Lands D	15.0 m	65	50 m
7SE-D/C 164	Slope	East	Lands D	6.0 m	55	31 m
7SE-D/C 155	Slope	East	Lands D	6.8 m	70	35 m

Location plan & basic information of the features are attached in **Appendix**

A. The available information indicates that the slope shall be in good condition.

A natural terrain is located at the east, west and north of the site.

3. THE PROPOSED DEVELOPMENT

The development involved the construction of residential development of four blocks of 1 to 4 storey residential building with one-level basement carpark. The schematic master layout plan and diagrammatic section of the proposed new building are given in Figure 2 and Figure 3.

4. EXISTING INFORMATION

4.1 Ground Investigation Information

Two boreholes carried out by Enpack (HK) Ltd. In 2001 BH8 and BH9 were found within the site, information is given in Appendix B.

4.2 Layout of Existing Utilities

Enquiries shall be made to various utility companies for the layout of existing utilities adjacent to the site. A waterpipe laid along the existing footpath to be diverted before the site formation work.

4.3 Layout of Existing Building Structure

There is one temporary structure of concrete building in the lot and this will be demolished during the development abandoned.

5. GROUND CONDITIONS

5.1 Topography

The elevation of site is about +4.5 – 7.5mPD. The site can be accessed via Access road from Hiram's Highway. The total area of the site is about

12,692m².

5.2 Geology

From the two boreholes information, the site would be covered by a layer of fill/ alluvium/ residual soil of 2m to 6m thick. Underneath the fill/ alluvium/ residual soil there would be a layer of grade V to IV TUFF. Grade III or better grade of Tuff be found at a depth of 3m to 6m below existing ground level.

Soil Properties

FILL

Fill generally consists of light brown, sandy silt.

ALLUVIUM

Alluvium generally consists of firm, greyish brown, silt or clayey sand, locally sandy or silty clay.

TUFF

Tuff was classified as weak to strong, light yellowish brown, highly to slightly decomposed, coarse ash crystal.

5.3 Groundwater Condition

Based on the available ground investigation information, highest water table may be at about 2m below existing ground level.

6. PROPOSED WORKS

6.1 Proposed Ground Investigation Works

The proposed Ground Investigation works for the site area at D.D.210, Sai Kung for the proposed development will include drilling of 7 vertical drillholes with installation of 3 standpipe / piezometer inside the site. Sampling of soil/rock material and testing will be proposed to determine the soil/rock properties.

6.2 Proposed Works on Existing Features

There are 2 existing features within the site and 4 outside site boundary but close to the site.

The stability of existing features within or close to the site (including any unregistered features) to be affected or being affected by the development during site formation works shall be assessed. Monitoring works shall be carried out during the whole construction period. Remedial or upgrading works shall be proposed and carried out if found necessary.

6.3 Proposed Works on Natural Terrain

6.3.1 Description of the Catchment Area

Based on available topographic maps No. 7SE-25A, 7SE-25B, 7SE-25C and 7SE-25D of Hong Kong from the Survey & Mapping Office (SMO) of the Lands Department, the hillside catchment of proposed Redevelopment understudy are described below, and presented as Figure 4, with relevant cross-sections of the catchment presented as Figure 5 to 13.

The Study Area can be sub-divided into 5 major catchments i.e.

- (a) Catchment OH(A1), OH(A2), OH(A3) & OH(A4) – They are piece of abandoned cultivated land at toe and undisturbed natural openhill terrain at crest. The majority portion of these areas is characterized by moderately gentle terrains i.e. 20° to 33° .
- (b) Catchment OH(B1) – Undisturbed natural openhill terrain. On the NE flank of the hillside, the contour run from +65.5 mPD highest at the burial urns. The majority portion of this catchment is characterized by gentle terrains i.e. $17^{\circ} < 20^{\circ}$.
- (c) Catchment OH(B2) – Undisturbed natural openhill terrain. On the NE flank of the hillside, the contour run from +40 mPD highest to +16mPD inclined gently at $17^{\circ} < 20^{\circ}$ followed by an incise

inclined river embankment. This catchment is separated from the subject site by a river 6m wide.

(d) Catchment CD(1) – the contour within this catchment contain channelized catchment pronounced with a definite flow path running downhill north easterly. The identified runoff angle in this depression zone is gentle i.e. 16° to 20° .

(e) Catchment CD(2) –the contour within this catchment contain channelized catchment pronounced with a definite flow path running downhill southerly. The identified runoff angle in this depression zone is gentle i.e. $10^{\circ} < 20^{\circ}$

6.3.2 Published Geology

Available geological information for the Catchment Areas have been reviewed. Based on GInfo Geological Map & Solid Geology, the catchment are underlain by coarse ash crystal TUFF, with overlying colluvium. Part plan of geological mapsheets are attached in Appendix D.

6.3.3 Landslide Inventories

According to the ENTL1 dataset (Appendix C refers), there are three historic relict landside first identified in 1963. These are 07SED0074E, 07SED0075E & 07SED0076E. These locations are marked on Aerial photos 1963 attached in Appendix E, also marked on Figure 4. In which two of them lies totally outside the Catchment Zone. Only 07SED0075E is of relevant to this study, and is further discussed in 6.3.5.

6.3.4 Summary of Catchment Study Areas

Referring to 2.3.4 Alert Criteria Fig 2.5 in GEO Report 138, the summary of Catchment Study Areas as follow:

Catchment Study Area	Angular Elevation of natural terrain from the site	Angular Elevation $\geq 20^\circ$	Within 50m of ground slope at $> 15^\circ$	Alert Criteria met?	Remark
OH(A1) (Section H-H)	19.7°	No	Yes	No	-
OH(A1) (Section B-B)	24°	Yes	Yes	Yes	-
OH(A3) (Section A-A)	26°	Yes	Yes	Yes	-
OH(A4) (Section D-D)	23°	Yes	N/A	Yes	The nearest facility is the swimming pool, which is Group 4 in the faculty grouping system. The clubhouse serves solely as a changing room for the pool. No one will remain in the clubhouse during critical weather or when the pool is closed.
CD(1) (Section C-C)	19°	No	N/A	No	
CD(2) (Section G-G)	10°	No	N/A	No	
OH(B1) (Section F-F)	17°	No	Yes	No	The catchment has a locally steep (23°) with only 10m slope at the toe, but with an overall angular elevation of 17°, it should not meet the Alert Criteria
OH(B2) (Section E-E)	31°	Yes	Yes	Yes	-

6.3.5 Initial Findings to Catchment OH(A2), OH(A3) and OH(B3) to be studied

As revealed from aerial photographs from 1963 to 2024. The catchment under study has no past landslide failure. These pre-historic events were identified. Two of these totally lied outside study catchment and direction of landslide is non-critical. Lies within

Catchment OH(A2) and OH(A3). No debris flow path can be traced in 1963 aerial photo. Primarily Catchment CD(1) remained undisturbed.

In conclusion, Catchment OH(A2) and OH(A3) contain cultivated land which likely have been progressively abandoned from 1963 onwards. Therefore, this vast piece of farmland and its surrounding natural habitats have been gradually covered up fully by mature dense vegetation. A summary of API is attached in Appendix E.

6.3.6 Screening of Catchment in accordance with GEO Report 138

Refer to 6.3.4. It is proposed the hillside catchment OH(A2) Section B-B, OH(A3) Section A-A & OH(B2) Section E-E shall carry out further study. The extent of natural terrains affecting the Site to be studied is demarcated in Figure 13.

6.4 Proposed Foundation Works

The proposed development comprises four blocks of 1 to 4 storey residential building with one level of basement carpark. The available ground investigation information indicates that the rockhead level, defined as weathering grade III or better rock with total core recovery greater than 85%, or a firm stratum such as grade IV rock, may be encountered on average at a level about 3m to 6m below the existing ground. As the loading from the building is comparatively general, mini pile or pre-boring socket H-piles are considered to be feasible foundation options for the proposed building. In case the rock head level is shallow or the bearing capacity is checked to be adequate, footing foundation shall be an alternative. The proposed foundation scheme of the development shall have minimal effect or impact to the stability of all slopes (man-made & natural terrains), retaining walls and existing building or structures within or in vicinity to the lot. Detailed foundation design will be submitted separately when the proposed ground investigation works are completed. Stability of all existing slopes (man-made & natural terrains) and retaining wall (including unregistered features) within or in vicinity to the lot affecting or being affected by the development during demolition & construction shall be assessed & remedial works shall be carried out if found necessary.

6.5 Proposed Site Formation, Excavation and Lateral Support Works

Since the proposed building platform is similar to existing ground level of the site, site formation works are considered to be minimal. For the construction of footing / pile cap, open excavation, sheet pile / pipe pile / soldier pile wall with walings and struts are considered to be feasible scheme to retain excavation depth. The choice of scheme of temporary support shall be subject to detail assessment. Stability of all existing slopes (man-made & natural terrains) and retaining walls (including unregistered features) within or in vicinity to the lot affecting or being affected by the development during demolition & construction shall be assessed & remedial works shall be carried out if found necessary. The detailed design of the works will be submitted separately.

6.6 Construction Method & Sequence

Monitoring points shall be installed & initial reading shall be recorded prior commencement of any works. Remedial works on existing slopes & retaining walls being affected shall be carried out prior commencement of site formation, ELS, foundation & superstructure. Pre-boring shall be carried out prior H-pile installation.

Obstruction during pipe pile installation for temporary ELS shall be overcome by pre-boring. Strut of the ELS shall not be dismantled until completion of the permanent screen wall support the level difference. All temporary cut slope and back filling shall be backfilled by proper material with proper compaction. Groundwater shall be controlled during the excavation. Excessive groundwater drawdown at the adjacent ground shall not be allowed.

7. IMPACTS ON ADJACENT PREMISES/GEOTECHNICAL FEATURES

As the existing registered retaining walls & slope is in close proximity to the captioned site, consideration shall be taken in the design of the proposed works. Also, vibration caused by the installation of the pipe piles / socket H-pile and the ground settlement caused by the wall deflection and dewatering in the excavated areas may cause adverse effects to the adjacent utilities and

structures. Therefore, it is necessary to limit the amount of vibration and ground settlement by adoption suitable lateral support works design and construction method. Pre-boring shall be carried out prior installation of piling for foundation and ELS. In all case, stability of existing geotechnical features within or in vicinity to the lot affecting or being affected by the development shall be assessed & remedial works shall be carried out if found necessary.

Groundwater control during the excavation is also critical for the design. Excessive groundwater drawdown at the adjacent ground is not allowed because ground settlement will be induced and damage will be caused to the adjacent structures and utilities. Detail assessment and design will be included in the foundation, site formation and ELS submission.

In addition, in order to ensure the adjacent premises will not be damaged by the proposed works, settlement monitoring stations, titling check points and building settlement pins will be proposed to be installed around the site. The movement of the adjacent premises will be monitored at these stations continuously throughout the work period. The noise from proposed works shall be kept within acceptable limit to minimize the disturbance to the environment. The detailed assessment and discussion on these aspects will be presented in the separate submission for ELS works.


8. **CONCLUSION**

On the basis of the available geotechnical information, the following conclusions and recommendation are drawn:

- The proposed development as presented in the Master Layout Plan is considered as a geotechnical feasible scheme.
- Ground investigation works will be carried out within the proposed development site.
- Mini pile or socket H pile with pre-boring is considered to be feasible foundation options for the proposed development. Footing may be an alternative if the soil stratum at shallow level provides adequate bearing capacity.
- The site formation works for the proposed development shall be minimal.

- Suitable groundwater control scheme shall be considered in design to avoid excessive groundwater drawdown at the adjacent area.
- Proper excavation and lateral support works design and construction method have to be adopted to minimize the adverse effect on the existing utilities and structures. The detailed discussion will be presented the separate submission for excavation and lateral support works.
- Stability of all slopes (man-made & natural terrains) and retaining walls (including unregistered features) within or in vicinity to the lot affecting or being affected by the development during demolition & construction works shall be assessed & remedial works shall be carried out if found necessary.
- Stability of the natural terrain affecting or being affected by the development permanently or temporarily during demolition & construction works shall be assessed & monitored. Mitigation works shall be proposed and carried out as necessary.


It is noteworthy to note that the works / proposal mentioned in this report are preliminary only at the planning stage and will be subjected to detailed study in the detail design stage under separate cover. Based on the current assessment, the proposed development is considered geotechnical feasible.

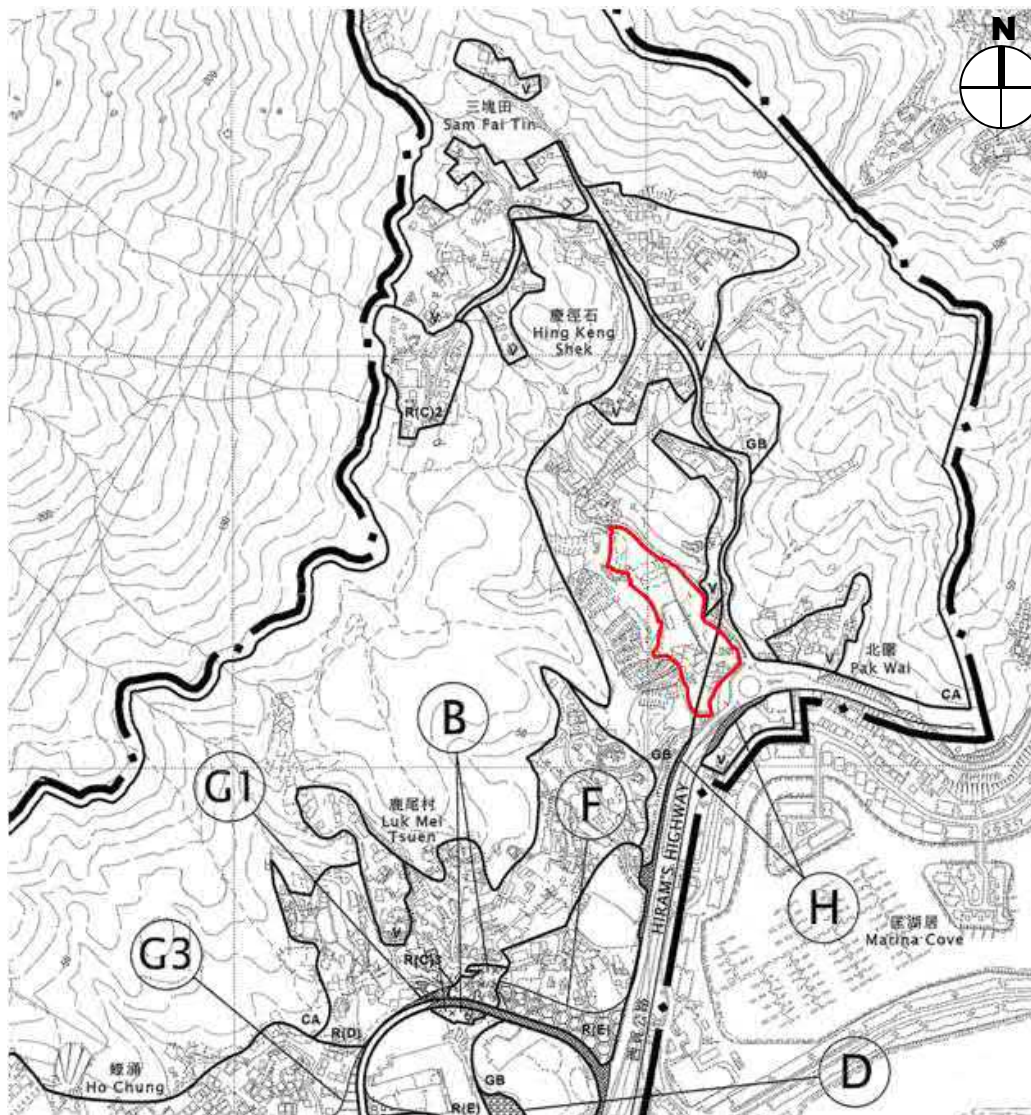

Site Location Plan


(Extracted from Draft Ho Chung Outline Zoning Plan No. S/SK-HC/12)

Figure 1

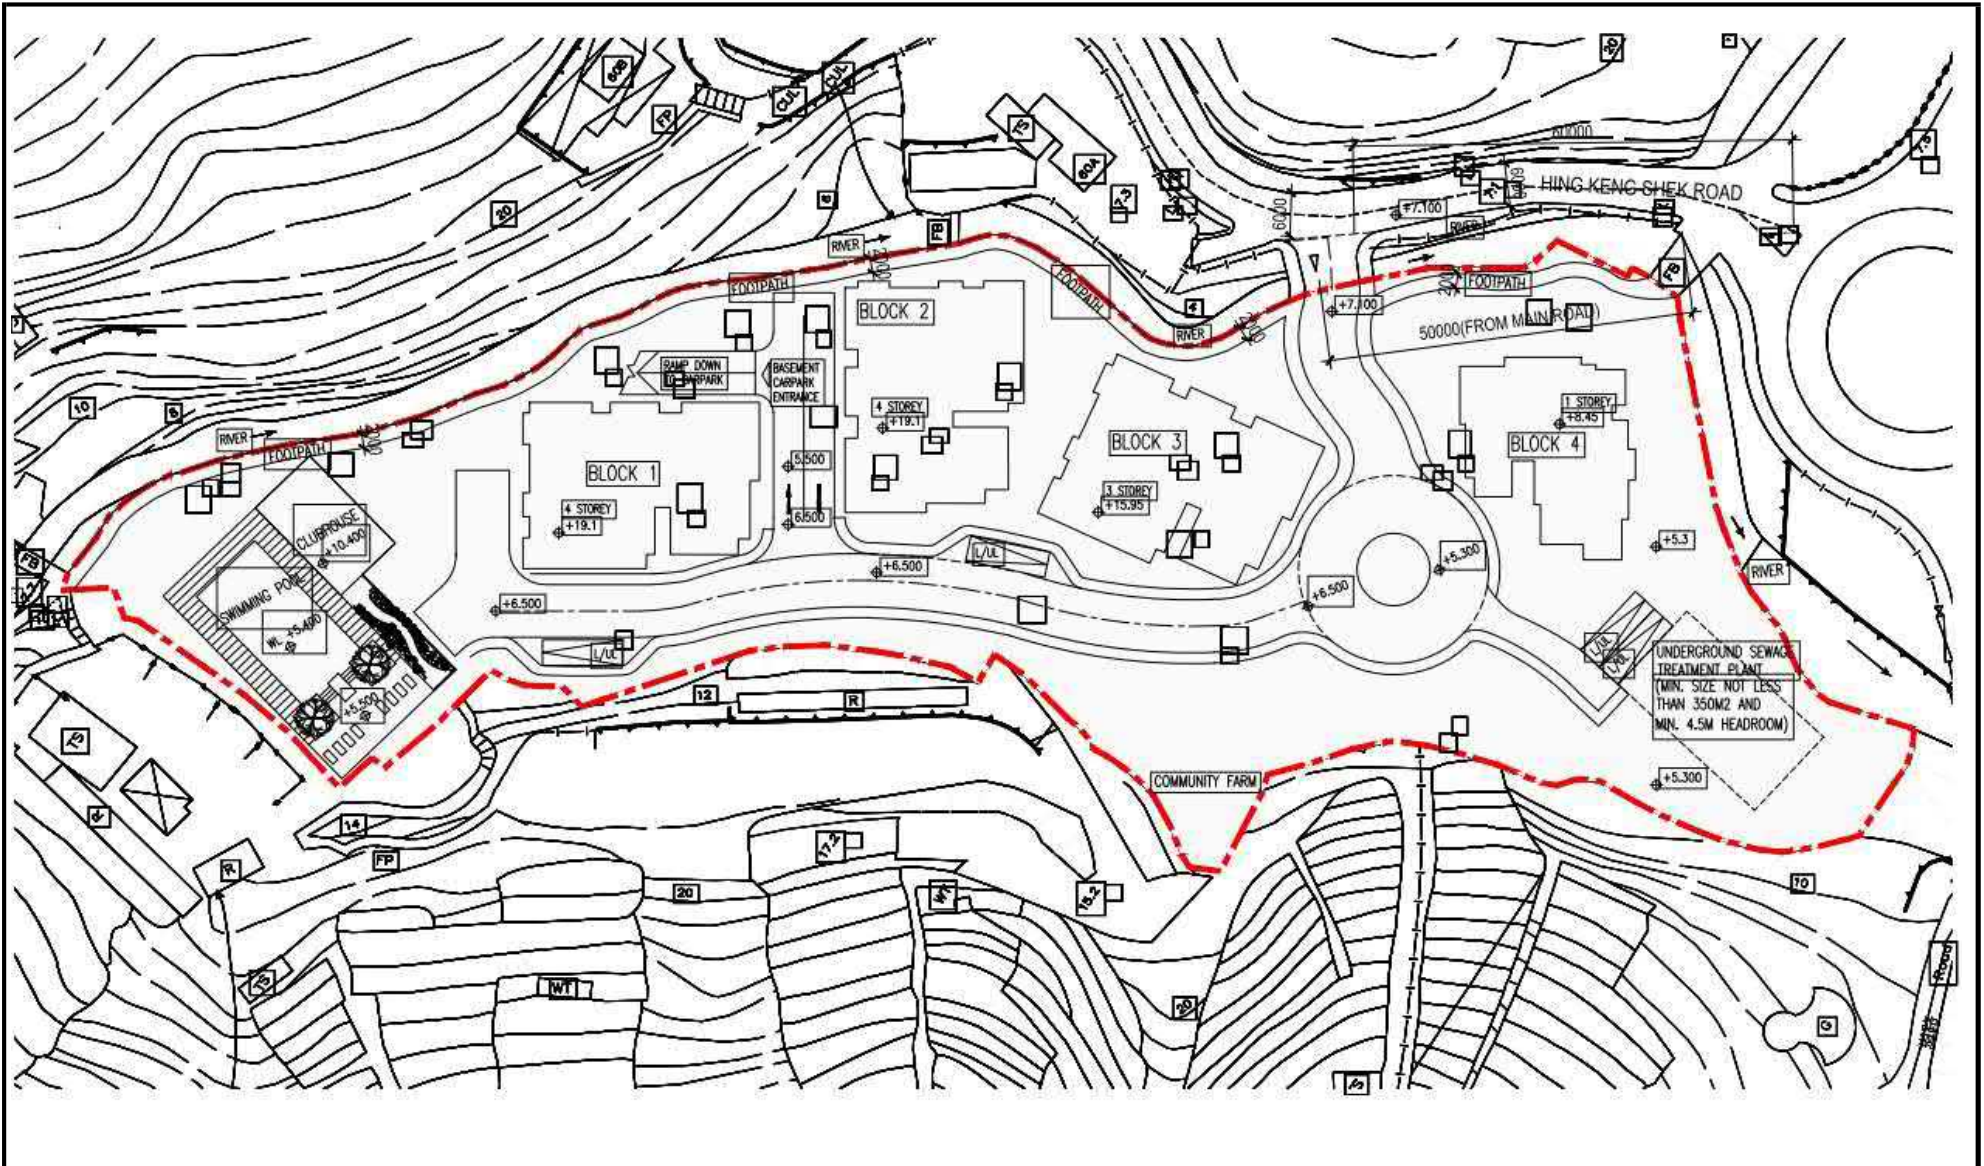


Master Layout Plan

Figure 2

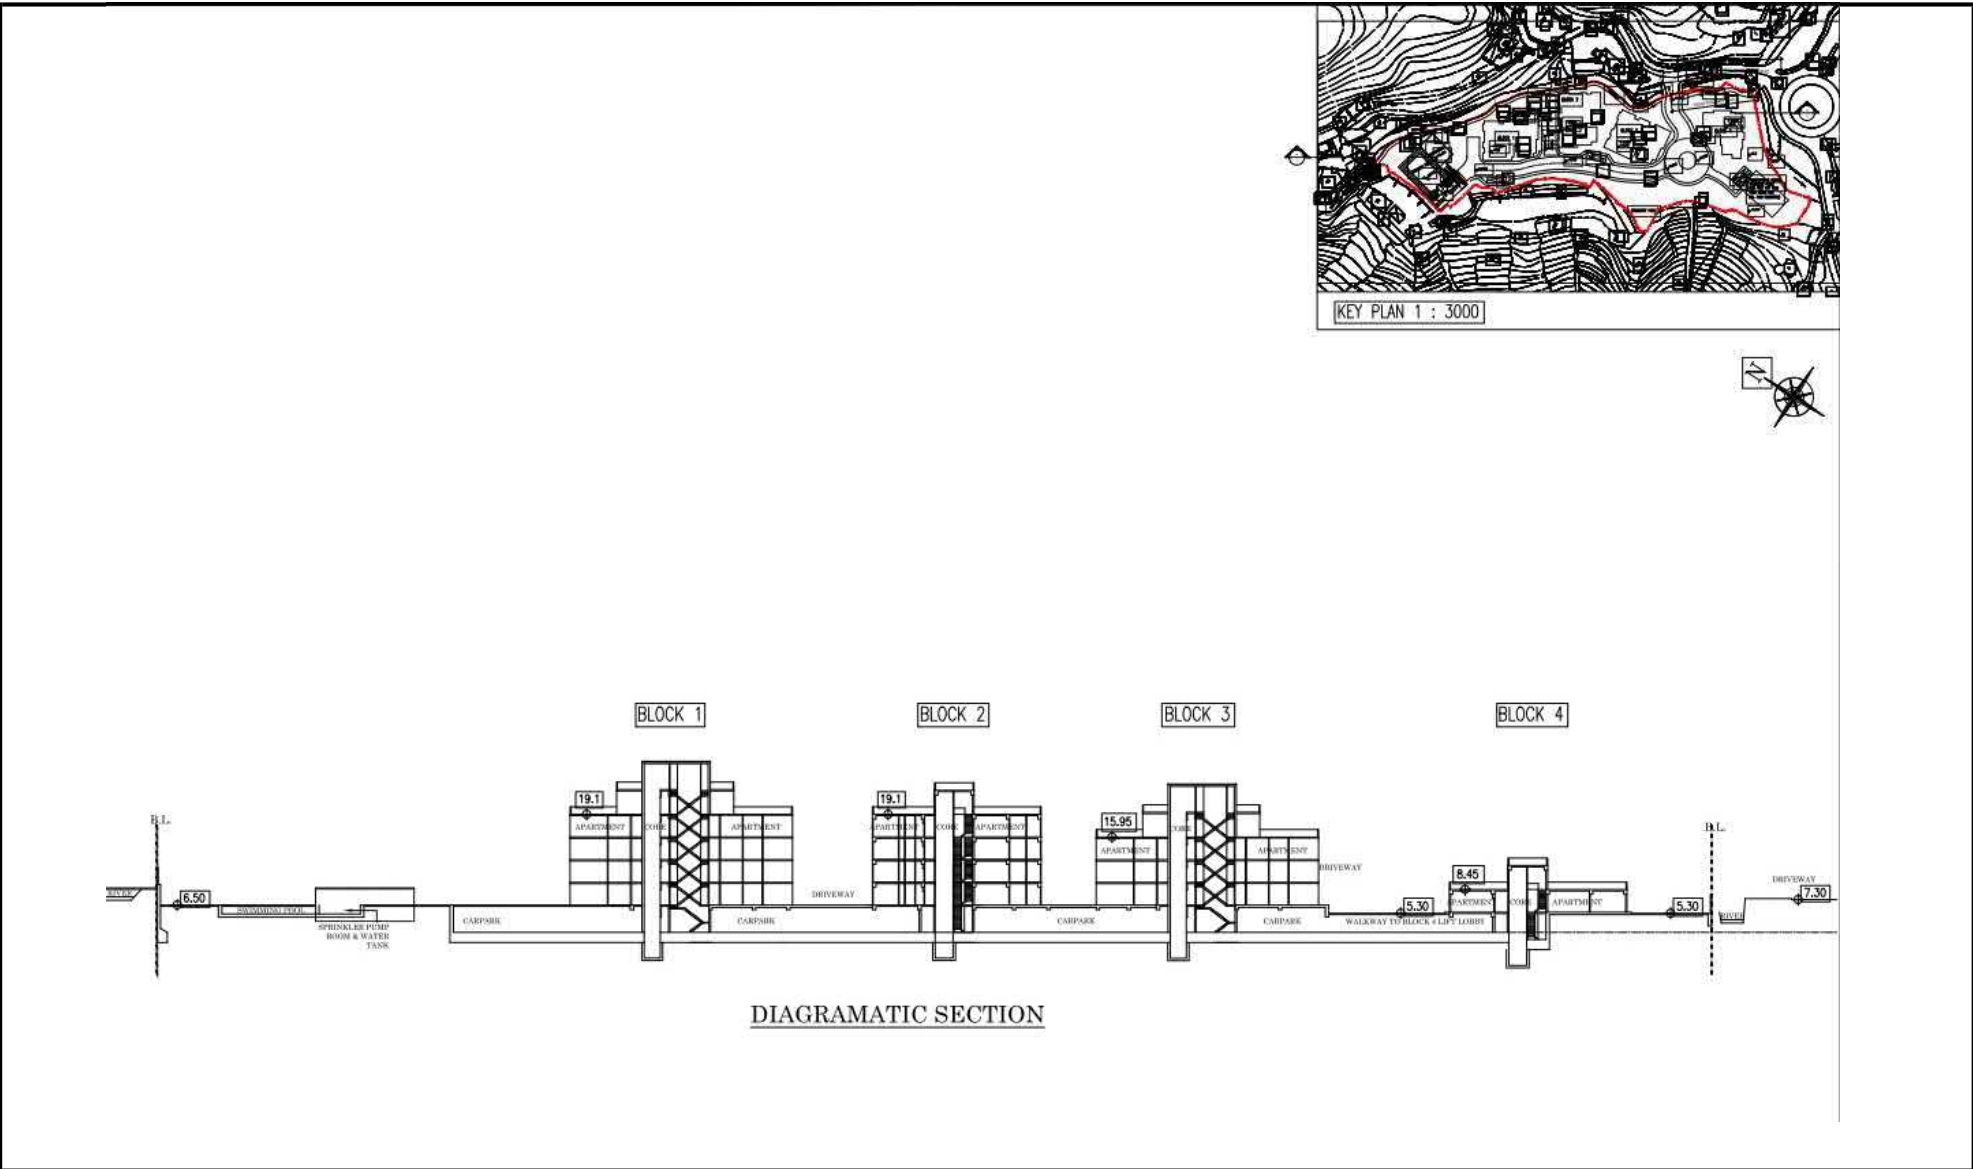

Diagrammatic Section

Figure 3

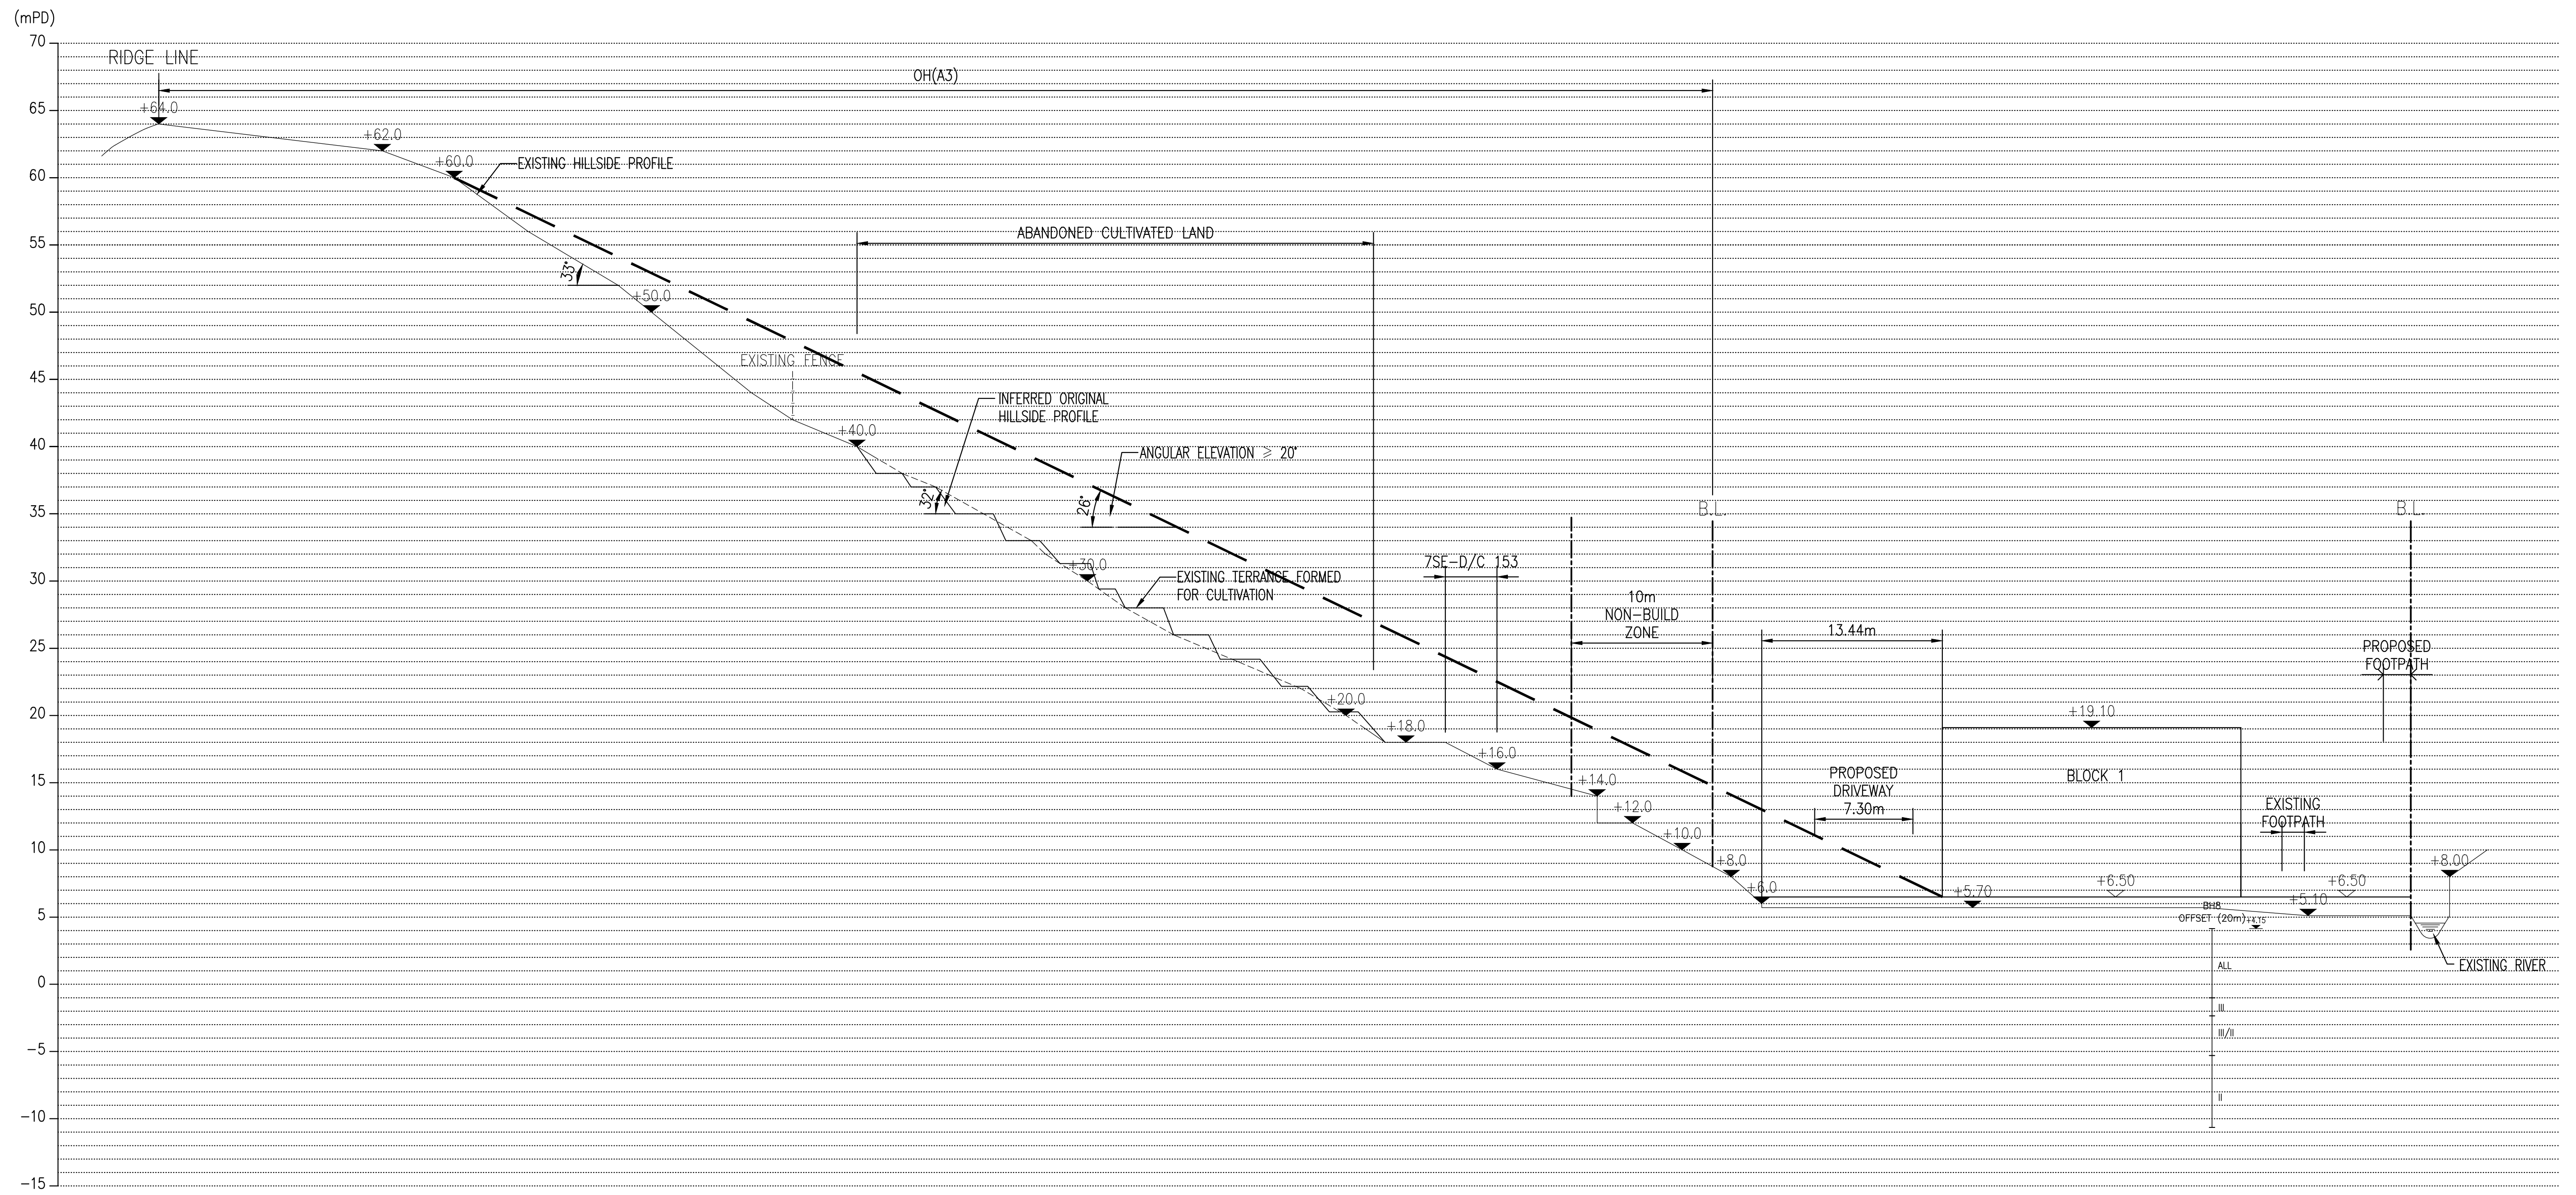

SECTION A-A
1 : 500

FIGURE 5


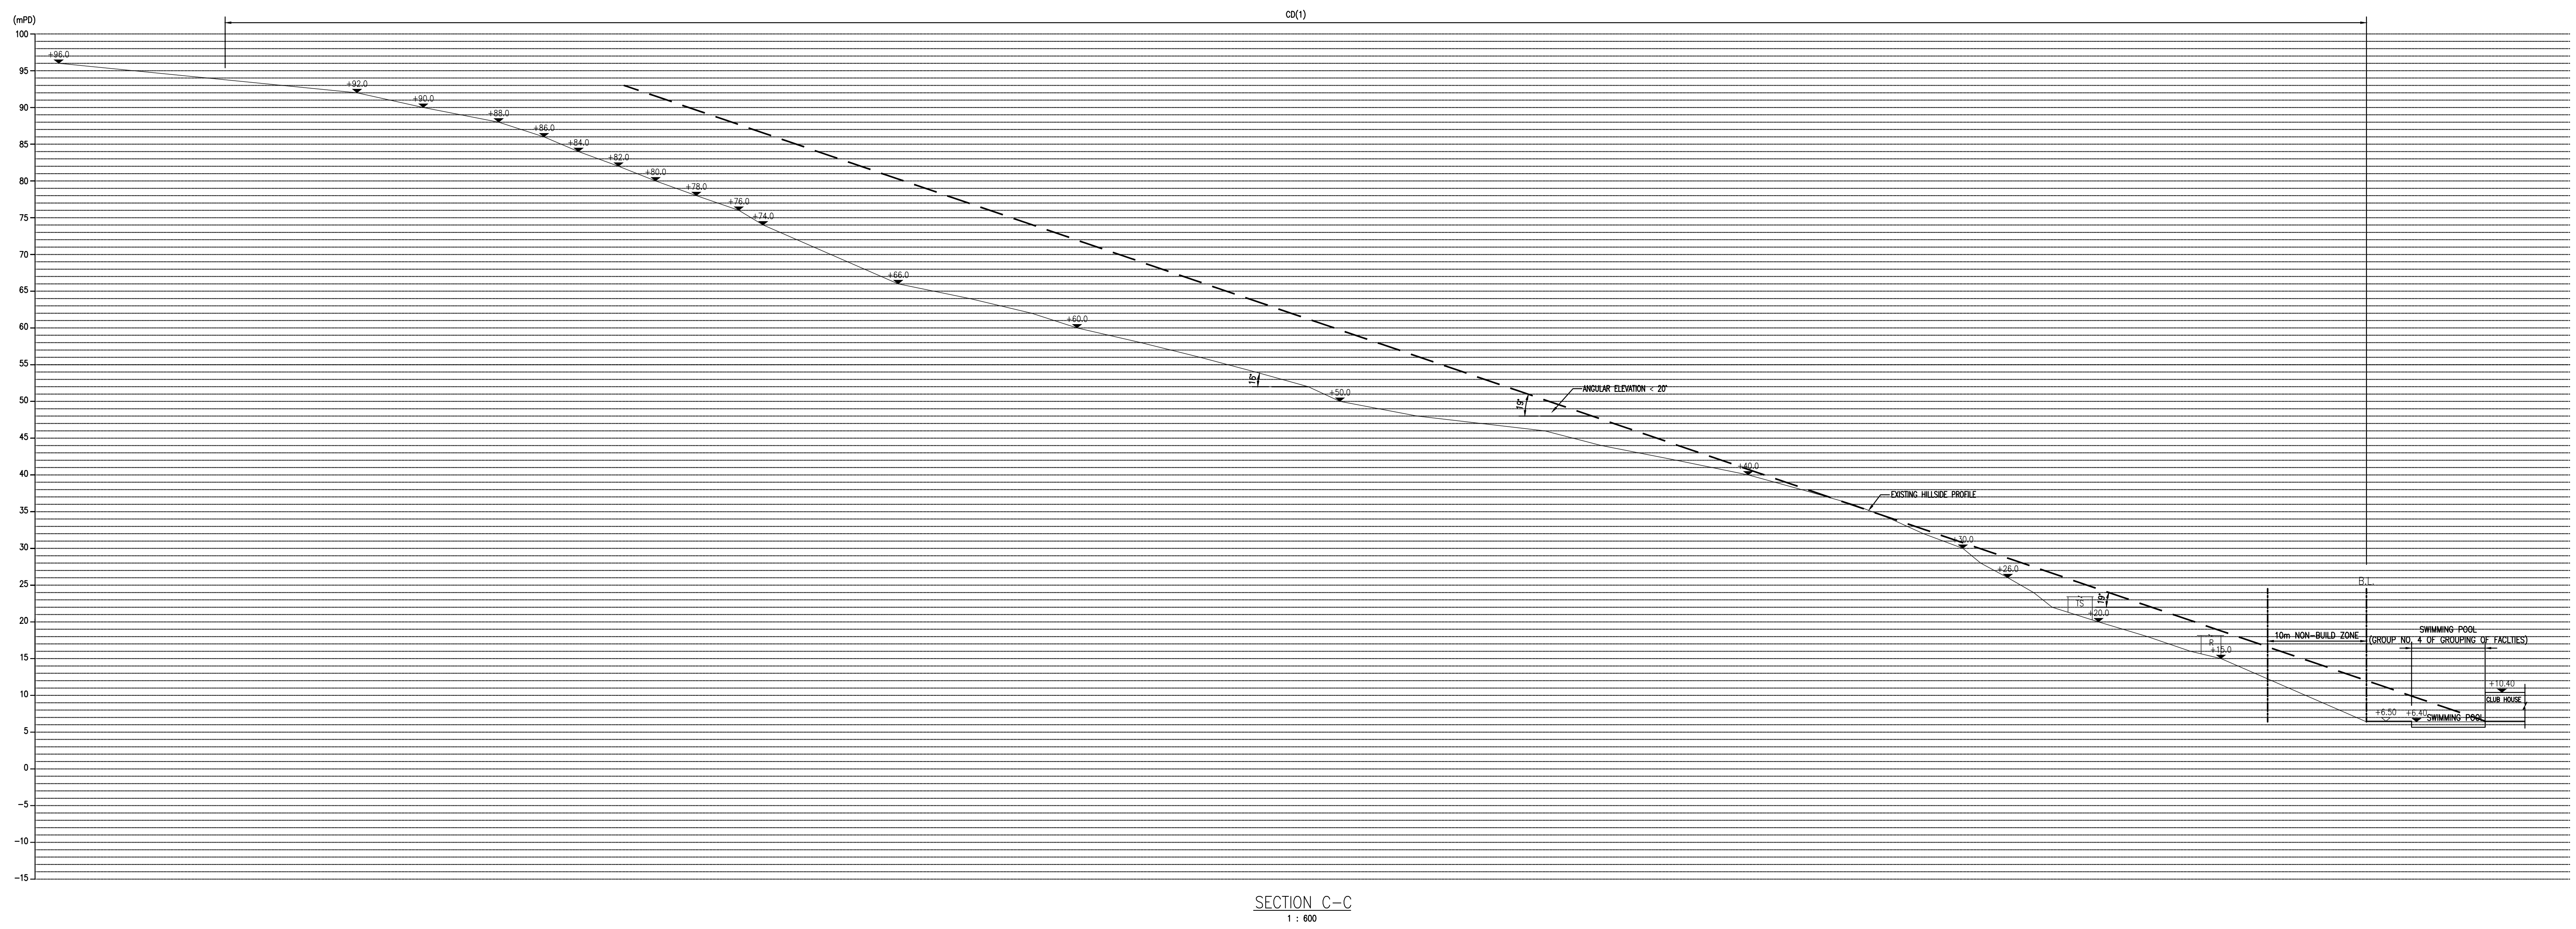


FIGURE 7

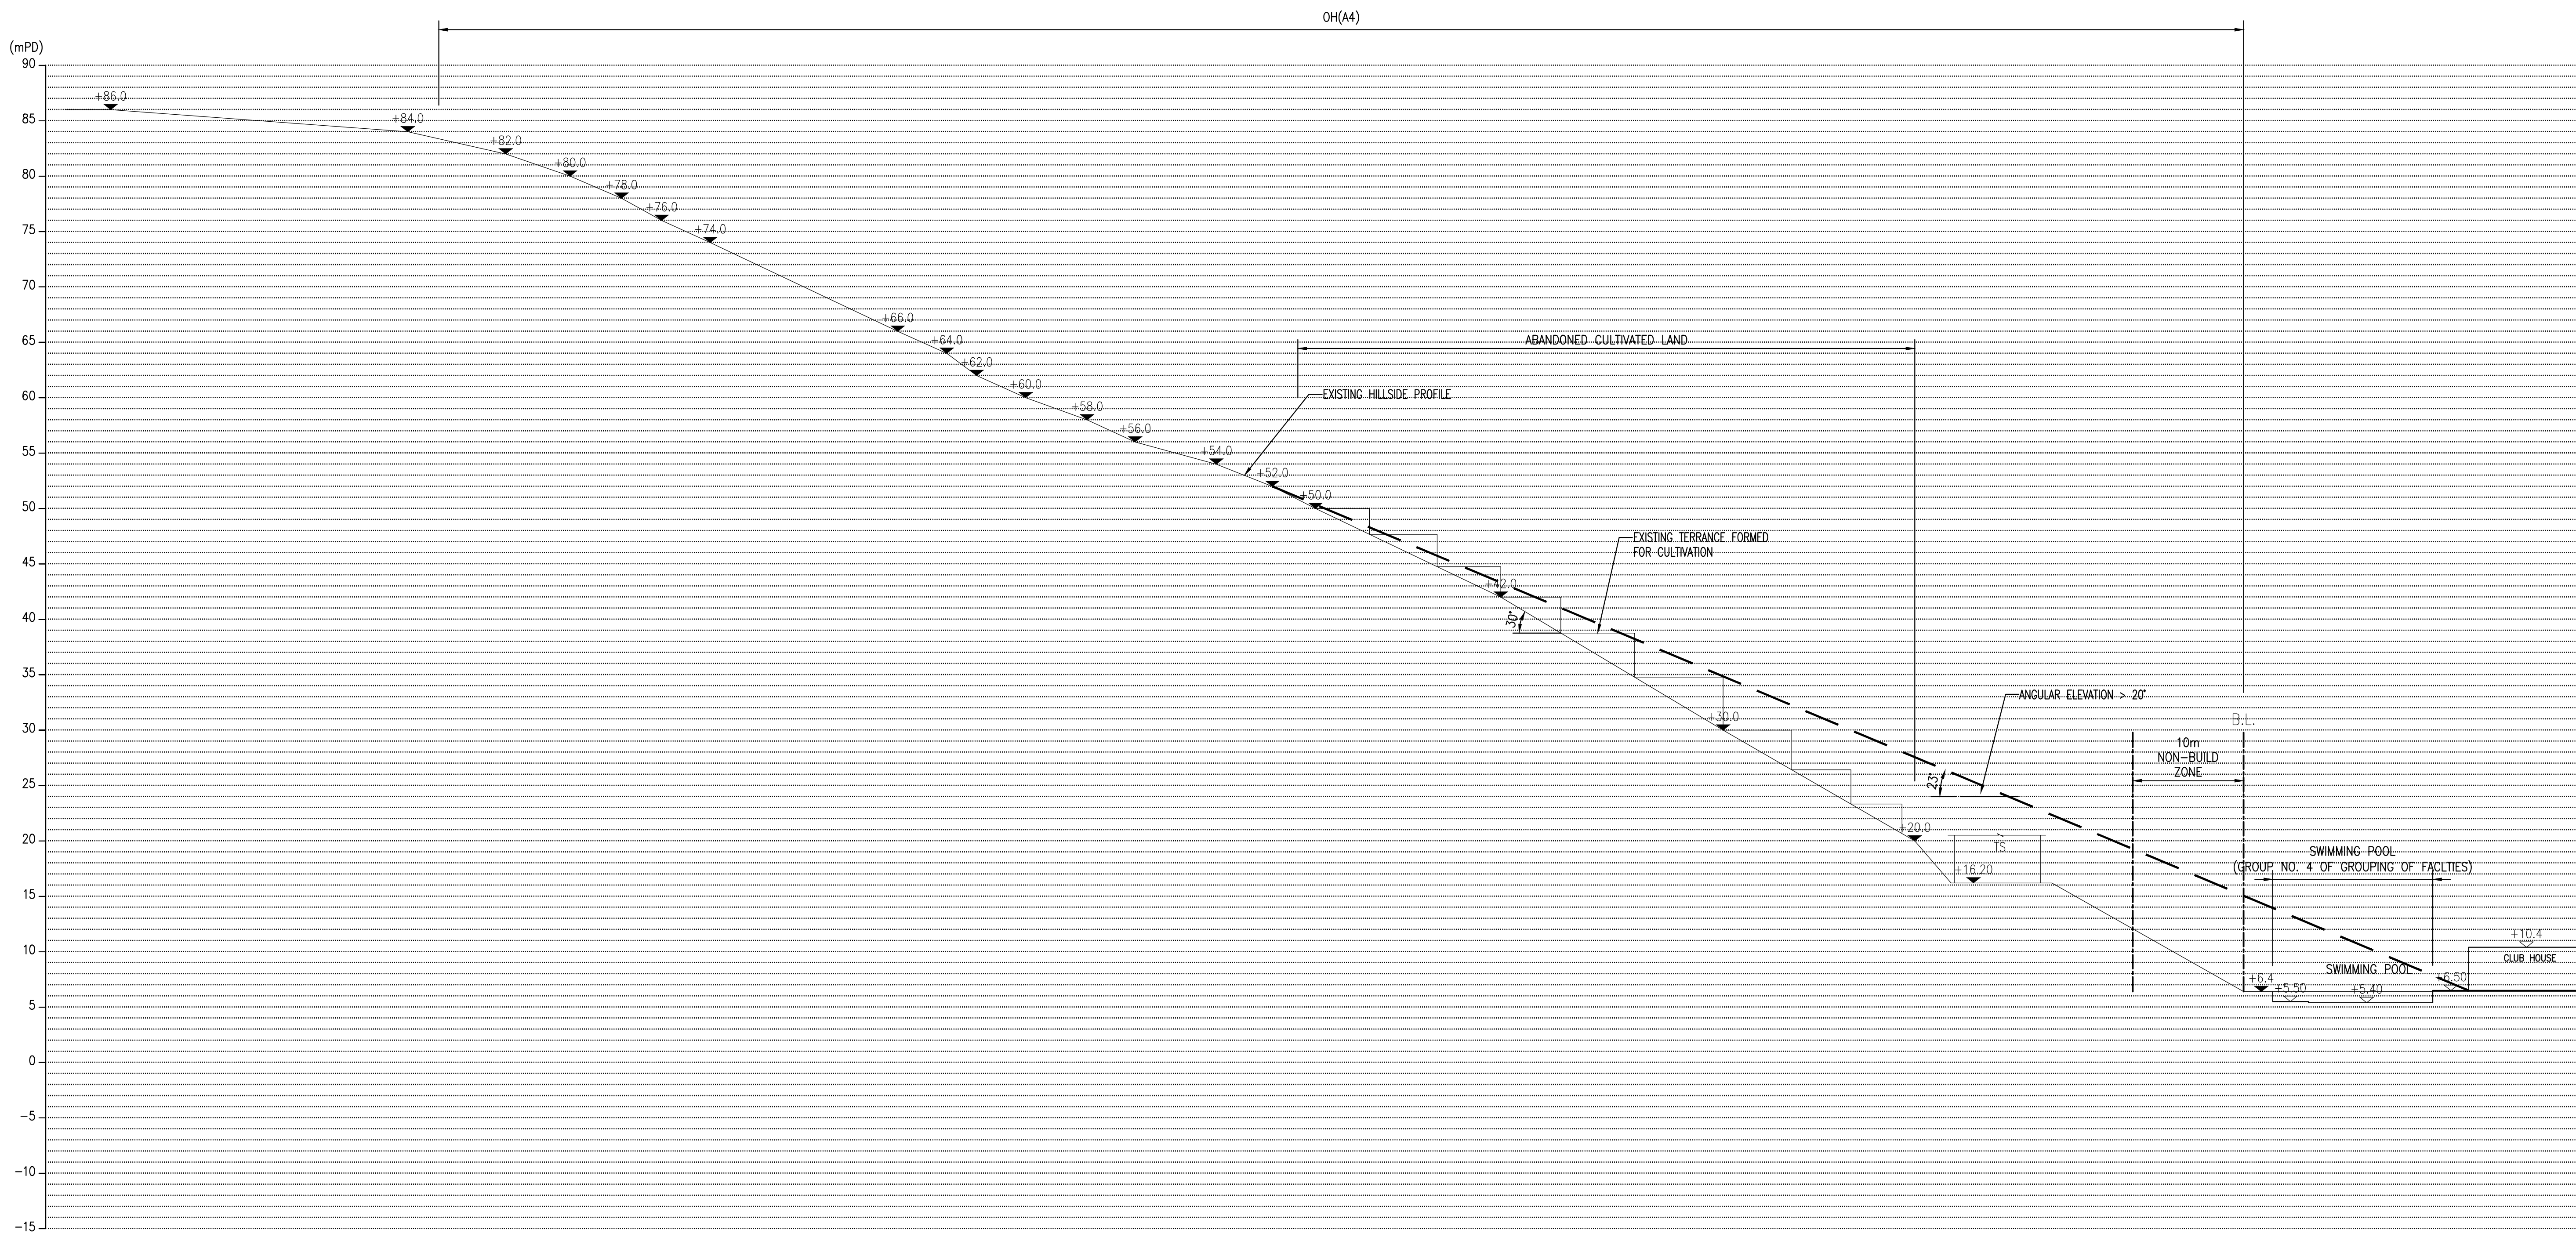

SECTION D-D
1 : 500

FIGURE 8

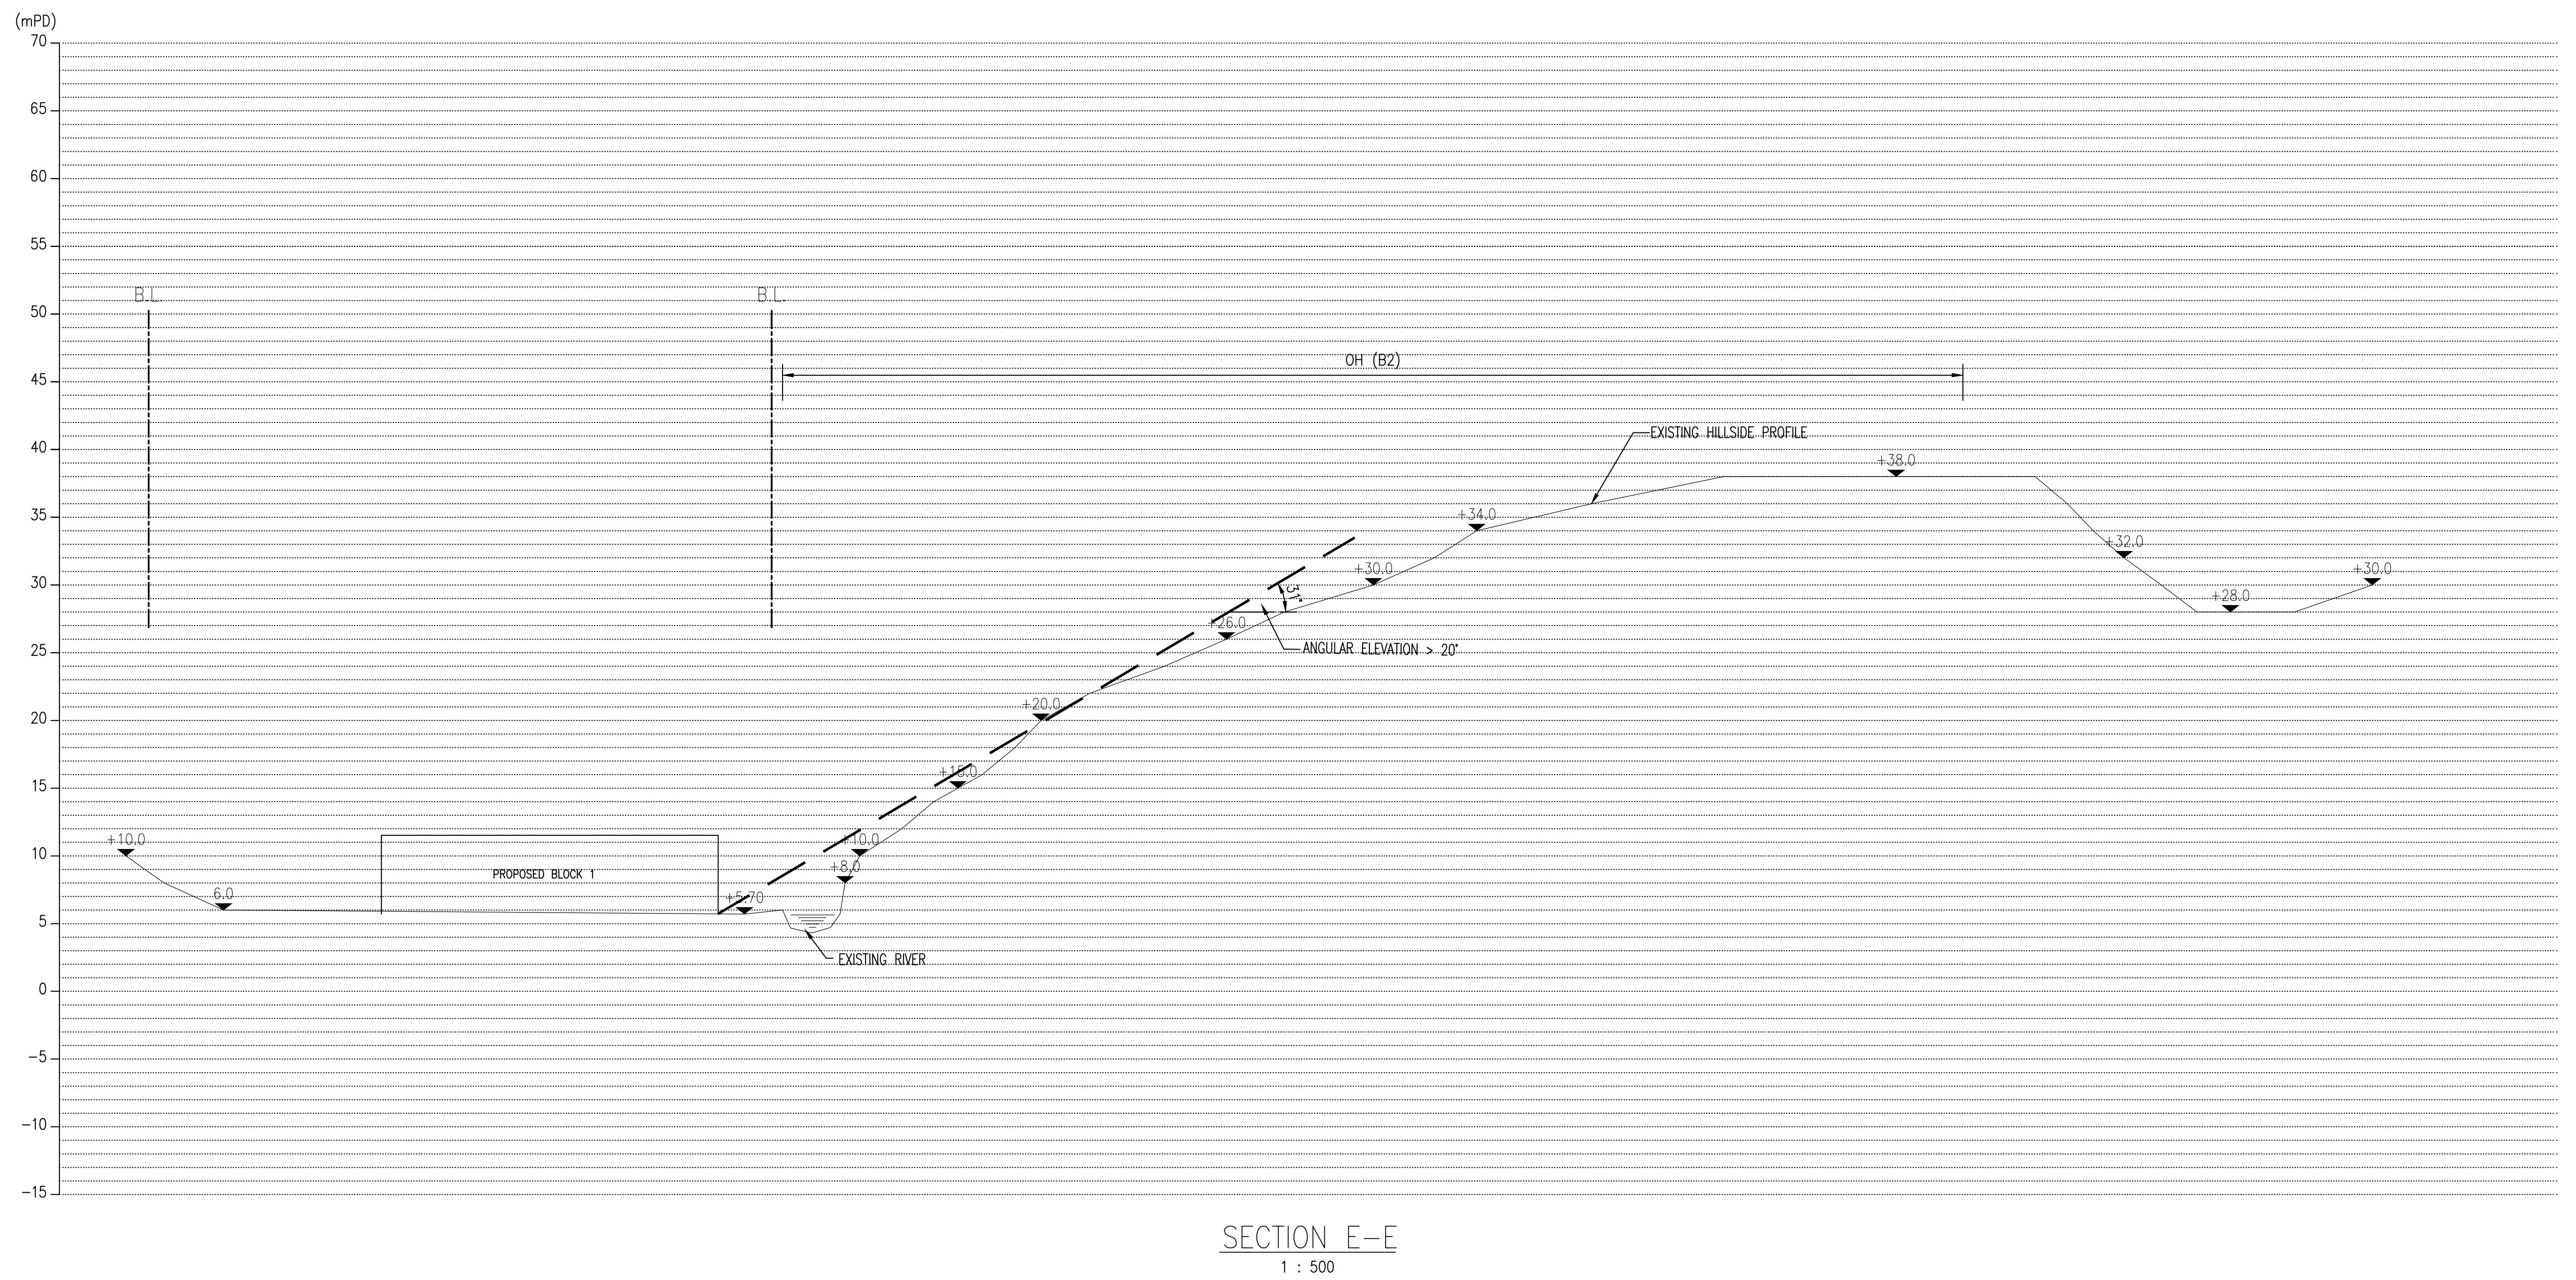


FIGURE 9



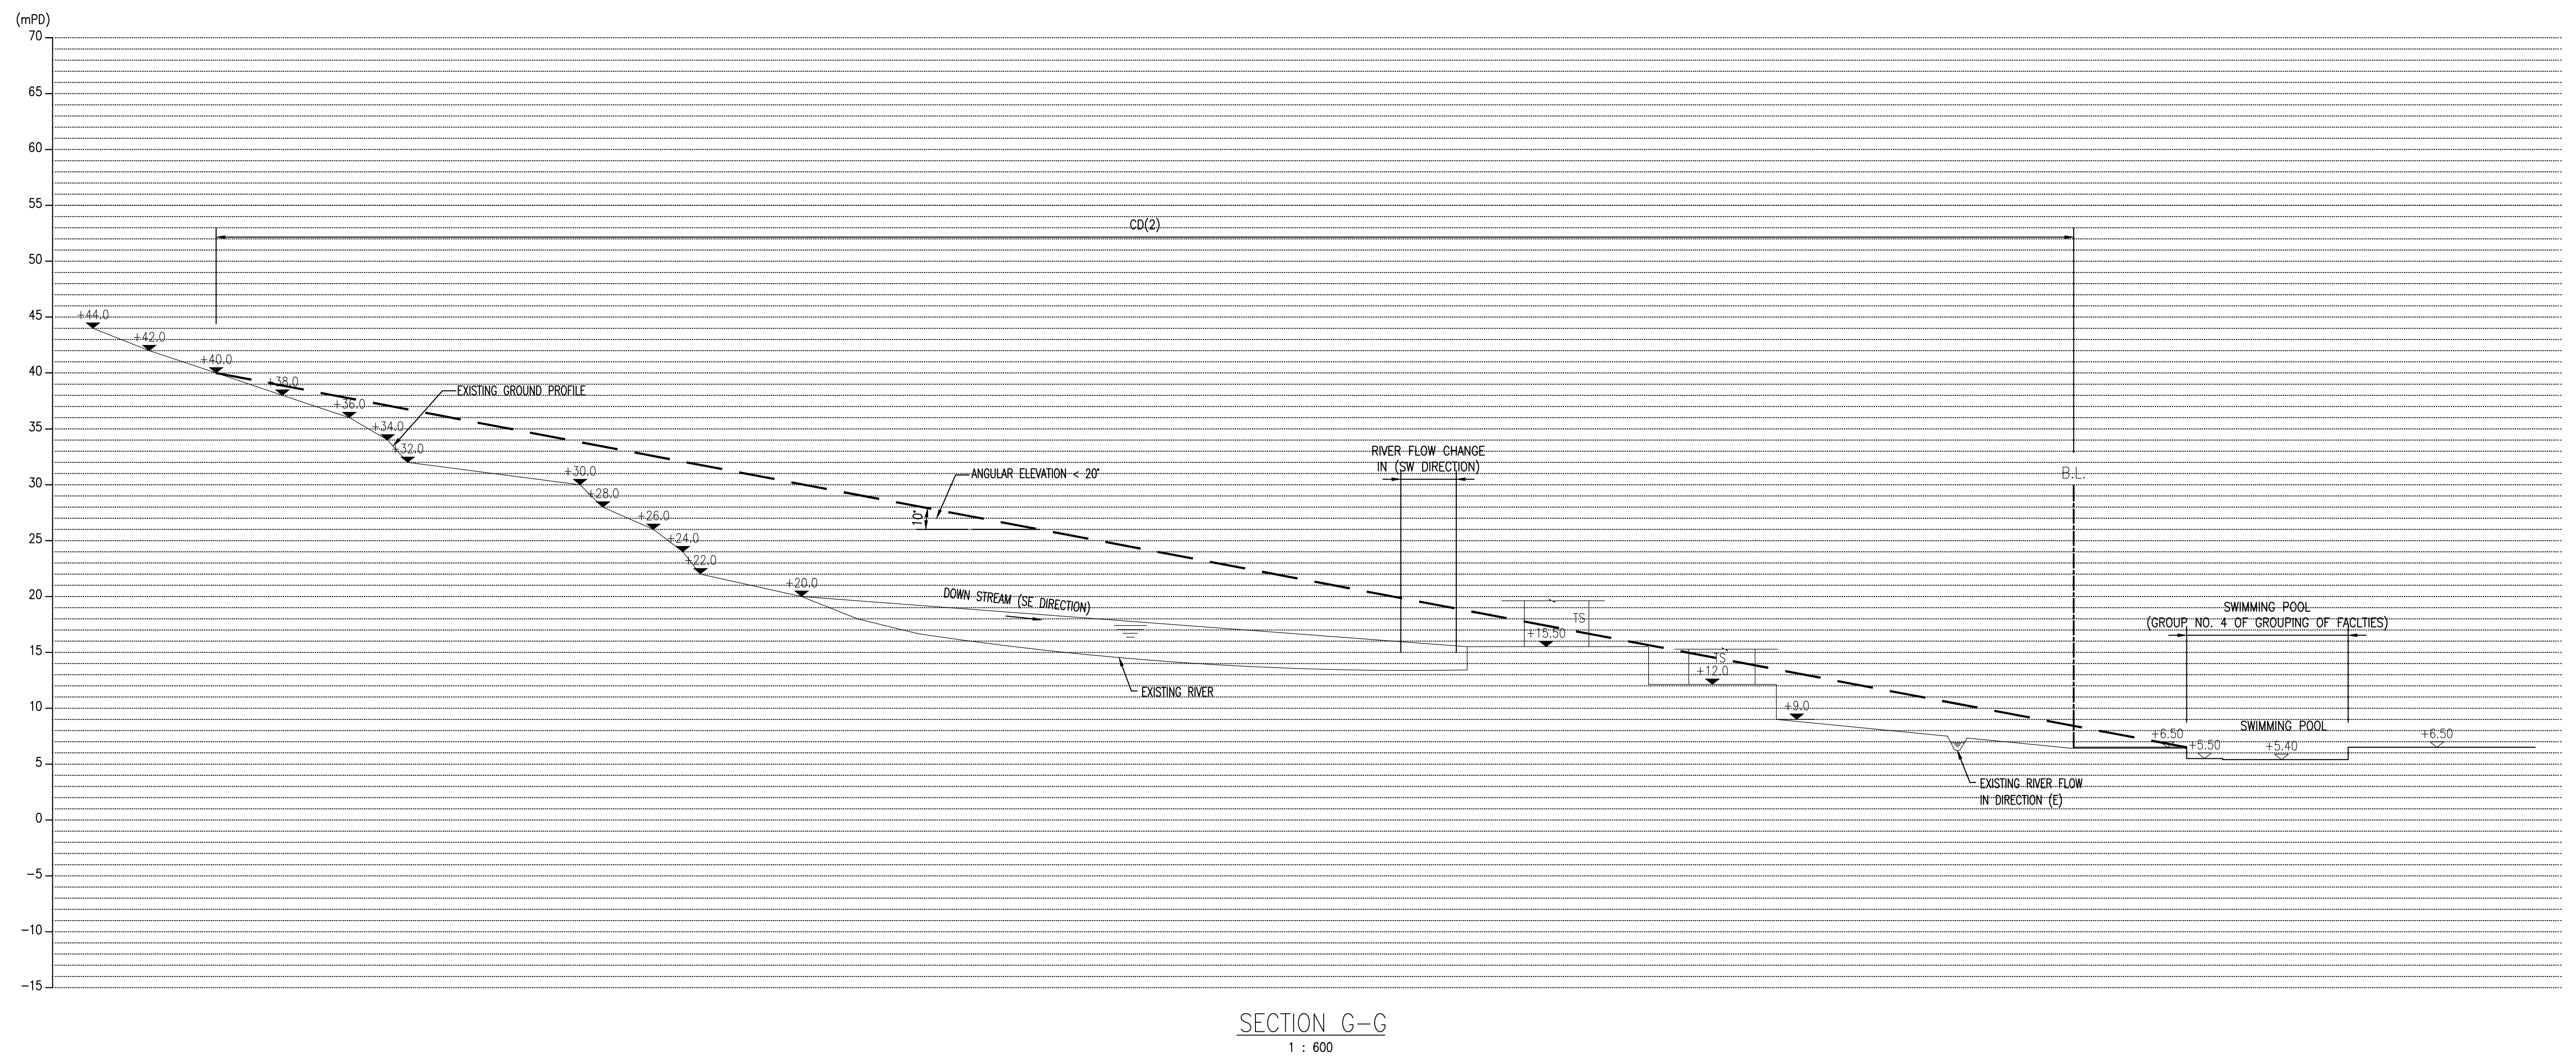


FIGURE 11


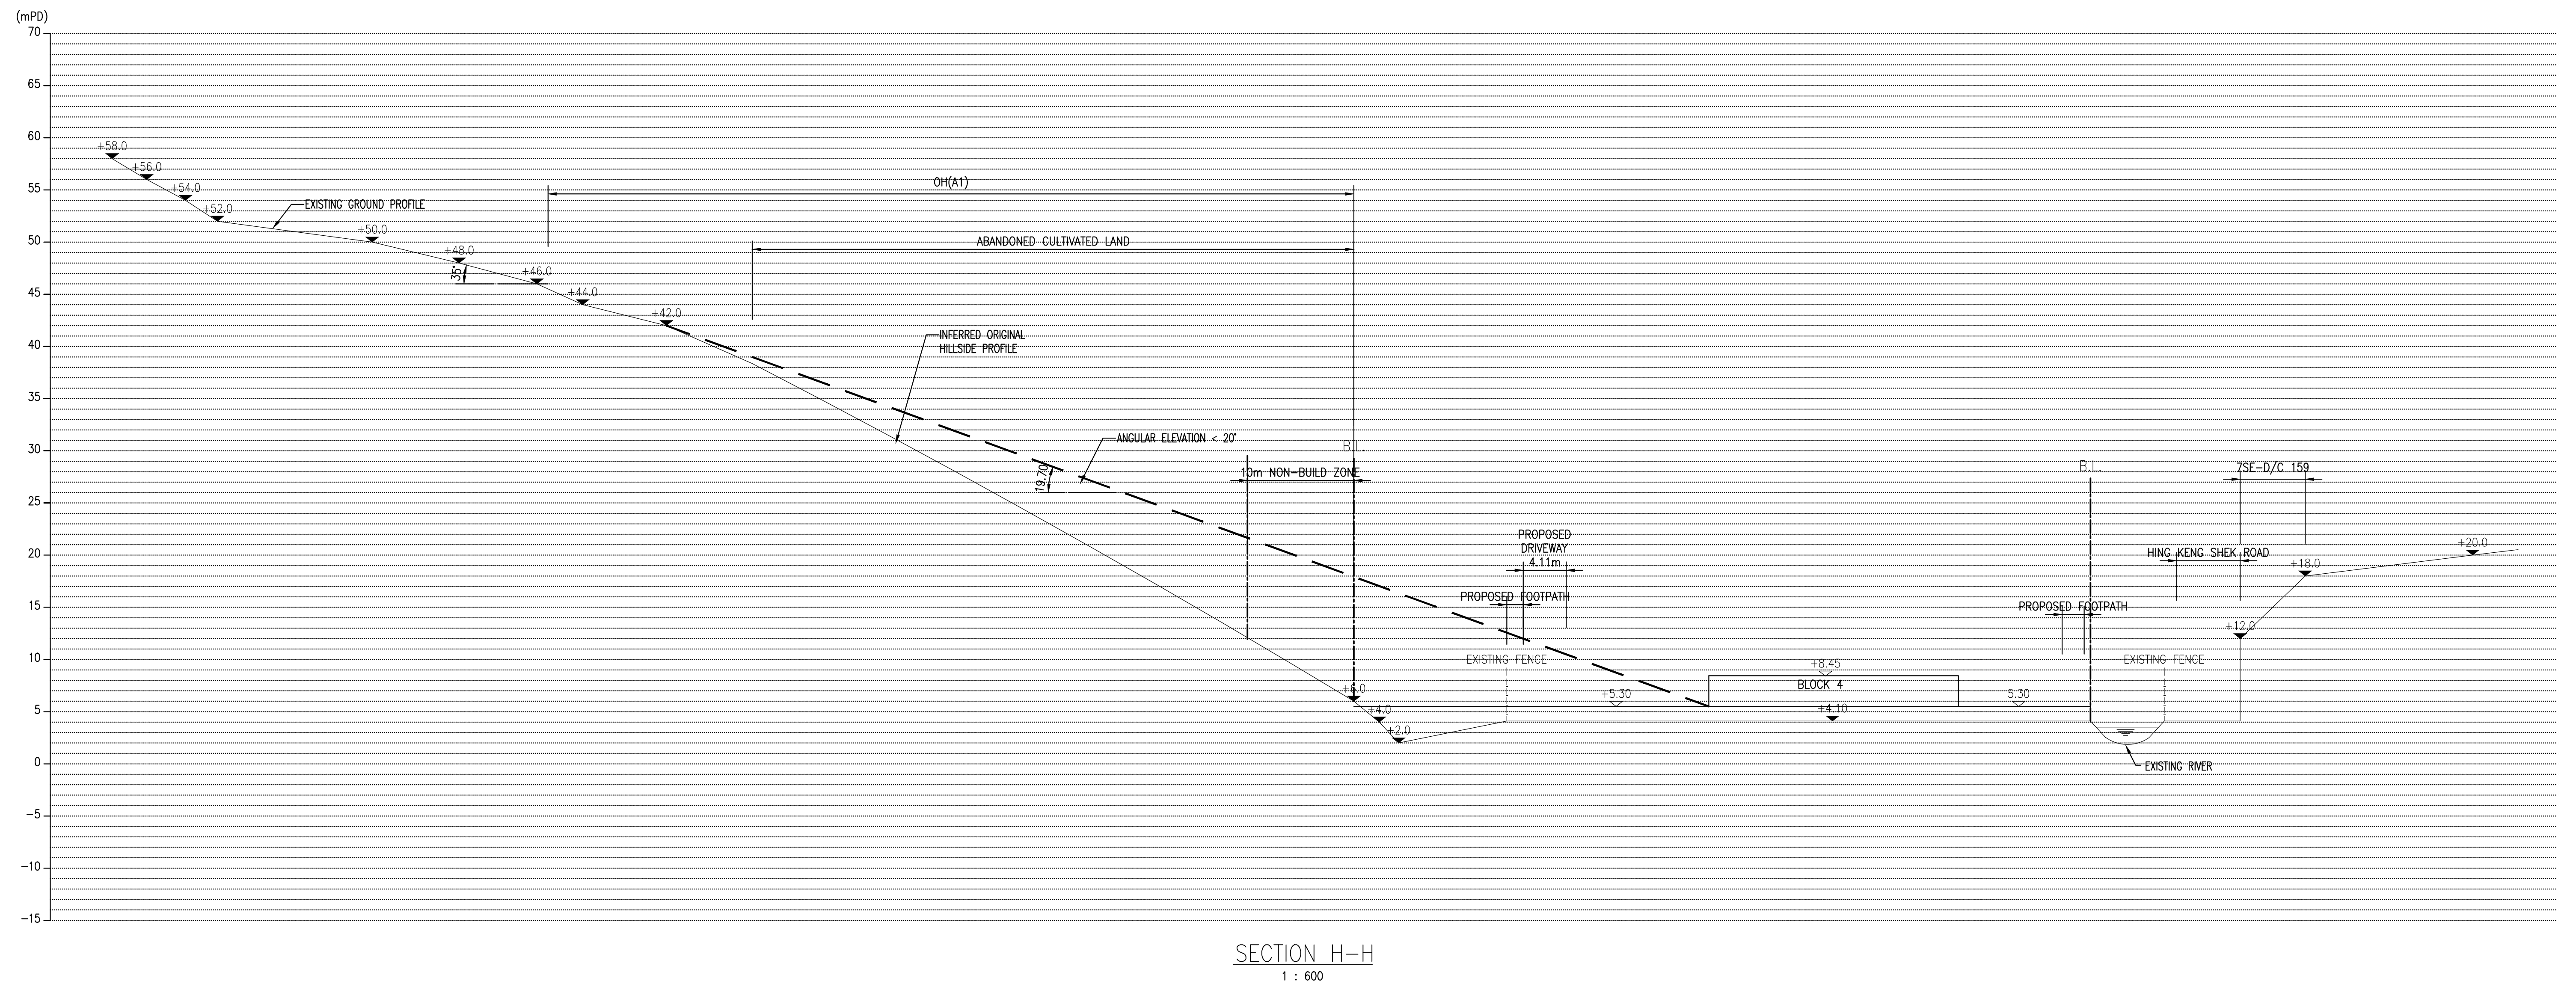


FIGURE 12

Appendix A

Information of Existing Slopes/ Retaining Walls

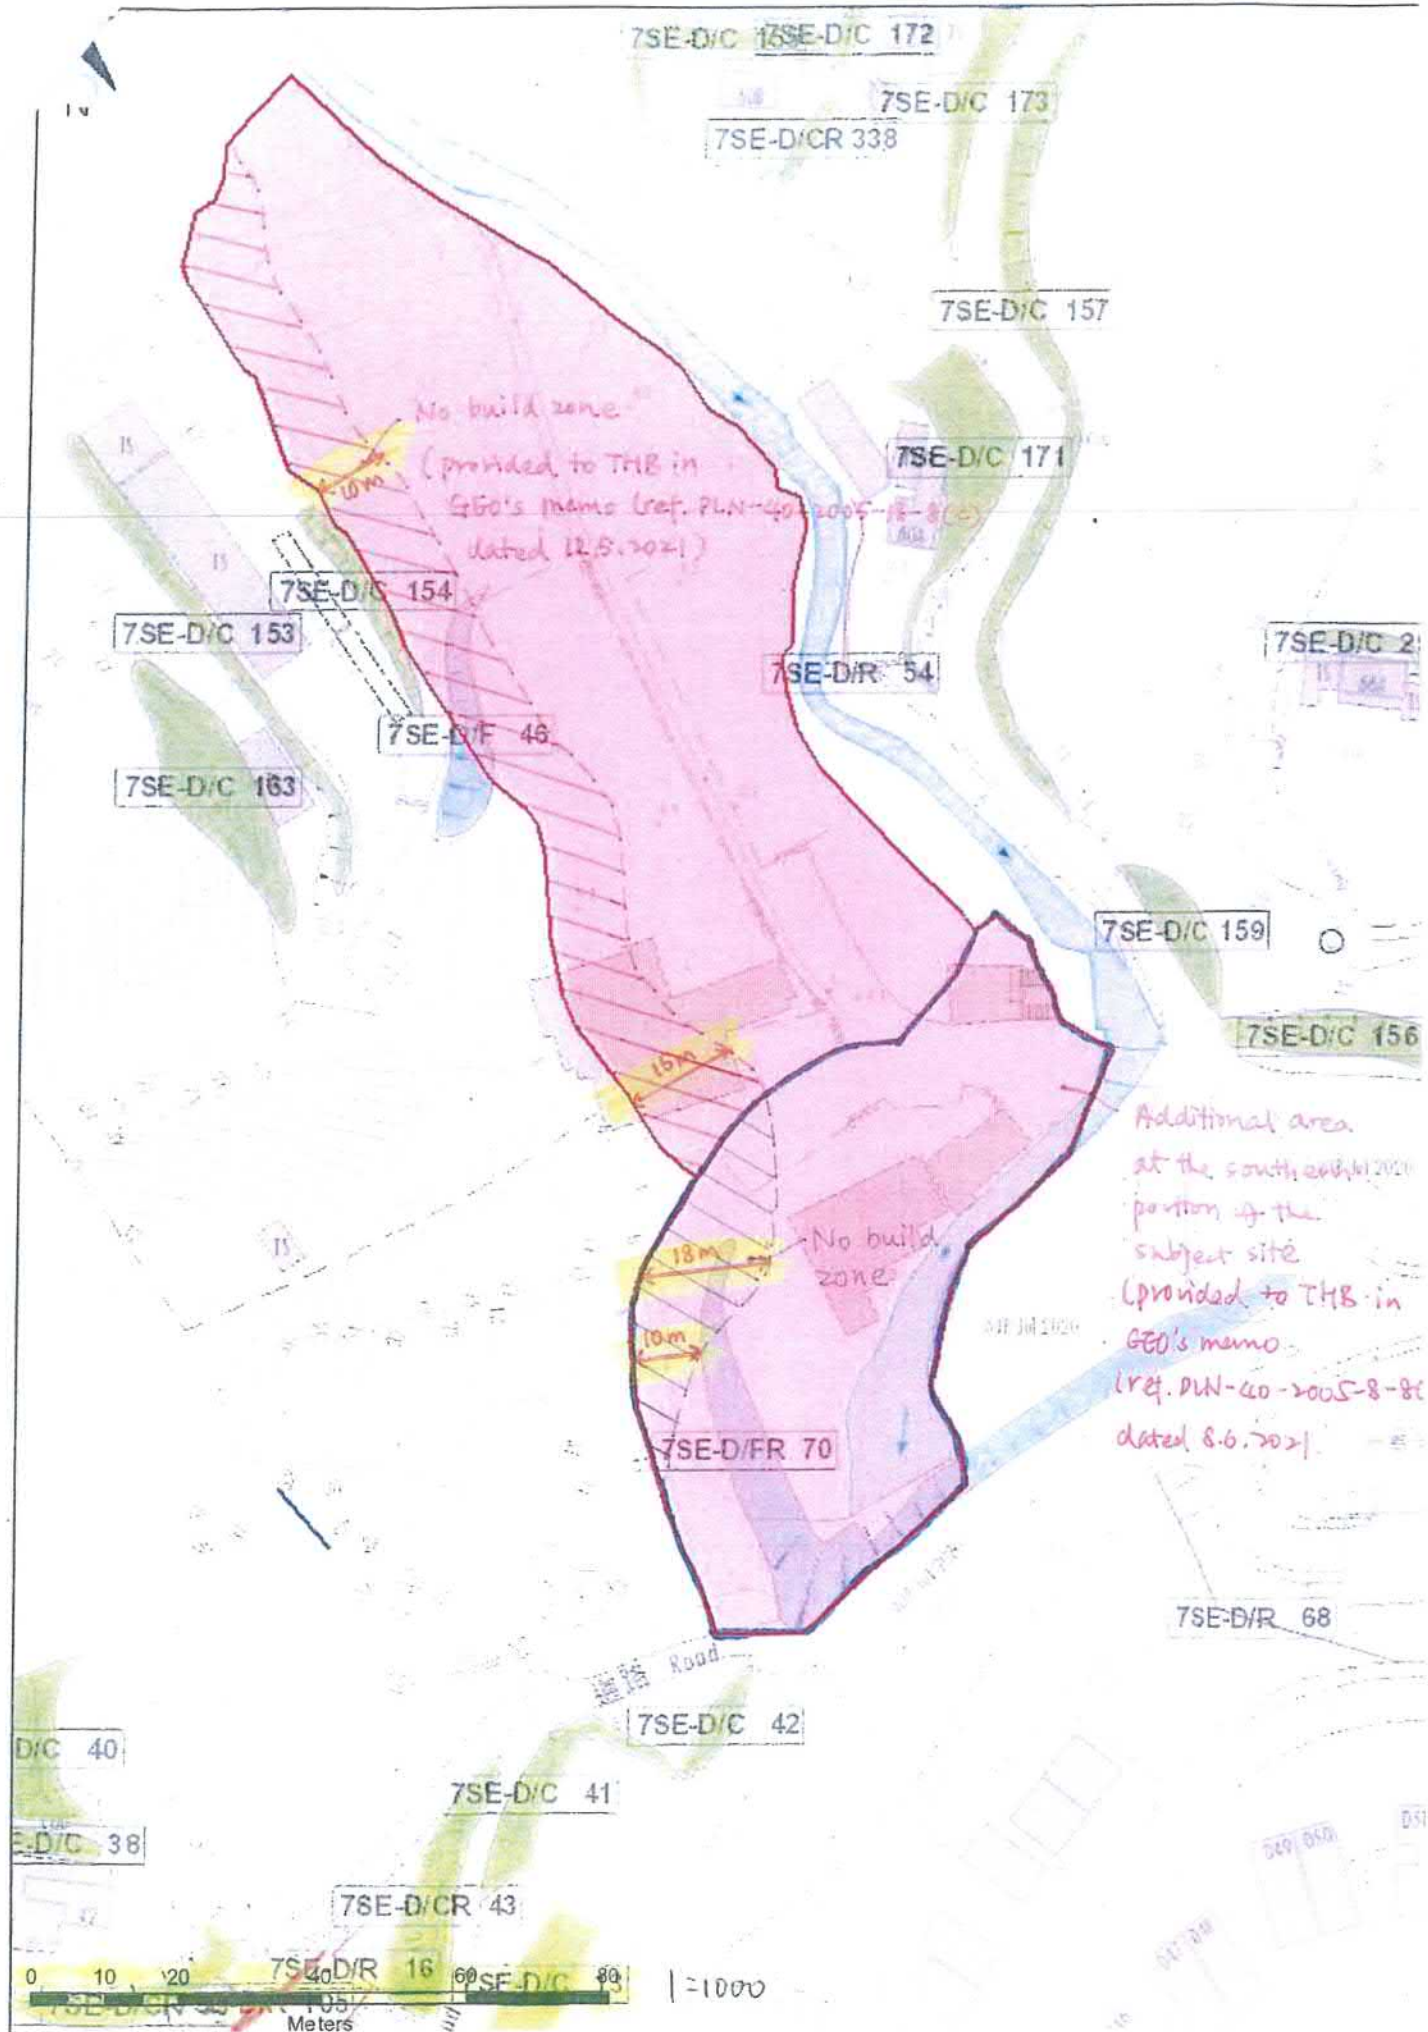

BASIC INFORMATION

Location: Southern part of Hing Keng Shek Village, Sai Kung
Registration Date: 19-12-1997
Ranking Score (NPRS): 0 (EI)
Date of Formation: pre-1977
Date of Construction/ Modification:
Data Source: Project Office
Approximate Coordinates: Easting : 844005 Northing : 824697

CONSEQUENCE-TO-LIFE CATEGORY

Facility at Crest: Remote area or abandoned facilities
Distance of Facility from Crest (m): 0
Facility at Toe: Remote area or abandoned facilities
Distance of Facility from Toe (m): 0
Consequence-to-life Category: 3
Remarks: N/A

SLOPE PART

(1) Max. Height (m): 4 Length (m): 35 Average Angle (deg): 40

WALL PART

N/A

MAINTENANCE RESPONSIBILITY

(1) Sub Div.: 1 Mixed Feature Party: Lands D Agent: Lands D Land Cat.: 1,5b(vi),7 Reason Code: 62,90 MR Endorsement Date: 05-05-1998
(2) Sub Div.: 2 Mixed Feature Party: DD210 Lot31 Agent: N/A Land Cat.: 1,5b(vi),7 Reason Code: 1 MR Endorsement Date: 05-05-1998

DETAILS OF SLOPE / RETAINING WALL

Date of Inspection: 04-12-2018
Data Source: Project Office
Slope Part Drainage: N/A
Wall Part Drainage: N/A

SLOPE PART



SLOPE INFORMATION SYSTEM

GEOTECHNICAL ENGINEERING OFFICE
CIVIL ENGINEERING AND DEVELOPMENT DEPARTMENT

Feature No. 7SE-D/C 154

Slope Part (1)

Surface Protection (%): Bare: 0 Vegetated: 100 Chunam: 0 Shotcrete: 0 Other Cover: 0
Material Description: Material type: Soil Geology: N/A
Berm: No. of Berms: N/A Min. Berm Width (m): N/A
Weepholes: Size (mm): N/A Spacing (m): N/A

WALL PART

N/A

SERVICES

N/A

CHECKING STATUS INFORMATION

N/A

BACKGROUND INFORMATION


GIU Cell Ref.: 7SE25A9
Map Sheet Reference (1:1000): 7SE-25A
Aerial Photos: 9301 (1974), 9302 (1974)
Nearest Rainguage Station (Station Number): Pak Kong Tsui Hang Special Area Management Centre(N50)
Data Collected On: 04-12-2018
Date of Construction, Subsequent Modification and Demolition: Modification: Constructed Before: 1974 After: 1968
Related Reports/Files or Documents: N/A
Remarks: N/A
Follow Up Actions: N/A
DH-Order (To Be Confirmed with Buildings Department): None
Advisory Letter (To Be Confirmed with Buildings Department): None
LPMIS: None

ENHANCED MAINTENANCE INFORMATION

From Maintenance Department: (Last Updated Date: 25/09/2025)

STAGE 1 STUDY REPORT

Inspected On: 13-03-1997
 Weather: Mainly Fine
 District: ME

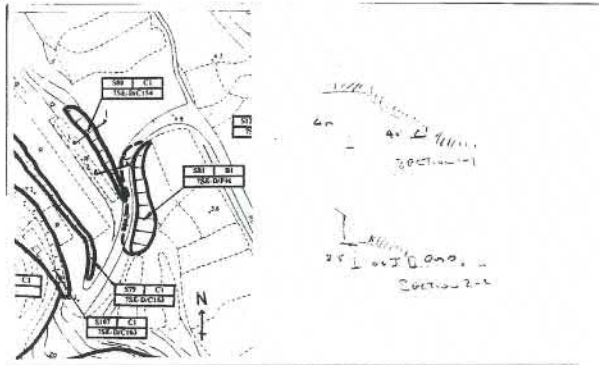

Section No: 1-1
 Height(m): H1 : 4 , H2 : 0
 Type of Toe Facility: Remote area or abandoned facilities
 Distance from Toe(m): 0
 Type of Crest Facility: Remote area or abandoned facilities
 Distance from Crest(m): 0
 Consequence Category: 3
 Engineering Judgement: U
 Section No: 2-2
 Type of Toe Facility: N/A
 Distance from Toe(m): 0
 Type of Crest Facility: N/A
 Distance from Crest(m): 0
 Consequence Category: 3
 Engineering Judgement: U
 Sign of Seepage: Slope : No signs of seepage
 Wall : N/A
 Criterion A satisfied: N
 Sign of Distress: Slope : Minor (mid-portion)
 Wall : N/A
 Criterion D satisfied: N
 Non-routine maintenance required: N
 Note: N/A
 Masonry wall/Masonry facing: N
 Note: N/A
 Consequence category (for critical section): 3
 Observations: N/A



Emergency Action Required: N
Action By: N/A

ACTION TO INITIATE PREVENTIVE WORKS

Criterion A/Criterion D: N/A
Action By: N/A
Further Study: N
Action By: N/A

OTHER EXTERNAL ACTION

Check / repair Services: N
Action By: N/A
Non-routine Maintenance: N
Action By: N/A

PHOTO







BASIC INFORMATION

Location: SOUTHERN PART OF HING KENG SHEK VILLAGE
Registration Date: 19-12-1997
Ranking Score (NPRS): 0 (Notional)
Date of Formation: pre-1977
Date of Construction/ Modification:
Data Source: SIRST
Approximate Coordinates: Easting : 844019 Northing : 824678

CONSEQUENCE-TO-LIFE CATEGORY

Facility at Crest: Road/footpath with very low traffic density
Distance of Facility from Crest (m): 0
Facility at Toe: Remote area or abandoned facilities
Distance of Facility from Toe (m): 0
Consequence-to-life Category: 3
Remarks: N/A

SLOPE PART

(1) Max. Height (m): 5 Length (m): 35 Average Angle (deg): 40

WALL PART

N/A

MAINTENANCE RESPONSIBILITY

(1) Sub Div.: 1 Mixed Feature Party: DD210 LOT31 Agent: N/A Land Cat.: 1 Reason Code: 1 MR Endorsement Date: 15-03-2001
(2) Sub Div.: 2 Mixed Feature Party: Lands D Agent: Lands D Land Cat.: 5b(vi) Reason Code: 62 MR Endorsement Date: 15-03-2001

DETAILS OF SLOPE / RETAINING WALL

Date of Inspection: 13-03-1997
Data Source: SIRST
Slope Part Drainage: N/A
Wall Part Drainage: N/A

SLOPE PART

Slope Part (1)
Surface Protection (%): Bare: 0 Vegetated: 100 Chunam: 0 Shotcrete: 0 Other Cover: 0
Material Description: Material type: Soil Geology: N/A
Berm: No. of Berms: N/A Min. Berm Width (m): N/A
Weepholes: Size (mm): N/A Spacing (m): N/A

WALL PART

N/A

SERVICES

N/A

CHECKING STATUS INFORMATION

N/A

BACKGROUND INFORMATION

GIU Cell Ref.:	7SE25A9
Map Sheet Reference (1:1000):	7SE-25A
Aerial Photos:	9301 (1974), 9302 (1974)
Nearest Rainguage Station (Station Number):	Pak Kong Tsui Hang Special Area Management Centre(N50)
Data Collected On:	13-03-1997
Date of Construction, Subsequent Modification and Demolition:	Modification: Constructed Before: 1974 After: 1968
Related Reports/Files or Documents:	N/A
Remarks:	N/A
Follow Up Actions:	N/A
DH-Order (To Be Confirmed with Buildings Department):	None
Advisory Letter (To Be Confirmed with Buildings Department):	None
LPMIS:	None

ENHANCED MAINTENANCE INFORMATION

From Maintenance Department: (Last Updated Date: 25/09/2025)



STAGE 1 STUDY REPORT

Inspected On:

Weather:

District: ME

Section No: 1-1

Height(m):

Type of Toe Facility: Remote area or abandoned facilities

Distance from Toe(m): 0

Type of Crest Facility: Road/footpath with very low traffic density

Distance from Crest(m): 0

Consequence Category:

Engineering Judgement:

Section No: 2-2

Type of Toe Facility:

Distance from Toe(m):

Type of Crest Facility:

Distance from Crest(m):

Consequence Category:

Engineering Judgement:

Sign of Seepage:

Criterion A satisfied:

Sign of Distress:

Criterion D satisfied:

Non-routine maintenance required:

Note:

Masonry wall/Masonry facing:

Note:

Consequence category (for critical section):

Observations: N/A

Emergency Action Required:

Action By: N/A

ACTION TO INITIATE PREVENTIVE WORKS

Criterion A/Criterion D: N/A

Action By: N/A

Further Study:

Action By: N/A

OTHER EXTERNAL ACTION

Check / repair Services:

Action By: N/A

Non-routine Maintenance:



Action By:

N/A



PHOTO



7SE-D/F46

General View





BASIC INFORMATION

Location: Hiram's Highway

Date of Formation: post-1977

Date of Construction/

Modification:

Approximate Coordinates: Easting : 844090 Northing : 824574

(OBSOLETE
FEATURE)

CONSEQUENCE-TO-LIFE CATEGORY

Facility at Crest: Road/footpath with heavy traffic density

Distance of Facility from Crest (m): 0

Facility at Toe: Horticulture garden

Distance of Facility from Toe (m): 0

Consequence-to-life Category: 2

Remarks: N/A

SLOPE PART

(1) Max. Height (m): 4 Length (m): 140 Average Angle (deg): 30

WALL PART

(1) Max. Height (m): 2 Length (m): 58 Face Angle (deg): 90



MAINTENANCE RESPONSIBILITY

Government Feature Party: HyD Agent: HyD

DETAILS OF SLOPE / RETAINING WALL

Date of Inspection: 18-06-2010
Data Source: EI(HyD)
Slope Part Drainage: N/A

Wall Part Drainage: N/A

SLOPE PART

Slope Part (1)
Surface Protection (%): Bare: 0 Vegetated: 100 Chunam: 0 Shotcrete: 0 Other Cover: 0
Material Description: Material type: Soil Geology: N/A
Berm: No. of Berms: N/A Min. Berm Width (m): N/A
Weepholes: Size (mm): N/A Spacing (m): N/A



WALL PART

Wall Part (1)

Type of Wall: Wall Material: Concrete Wall Location: Wall at toe

Berm: No. of Berms: N/A Min. Berm Width (m): N/A

Weepholes: Size (mm): N/A Spacing (m): N/A

SERVICES

- | | | | | |
|-----|-----------------------------|---------------|--------------------|-----------------------------------|
| (1) | Utilities Type: Cable | Size(mm): 0 | Location: On crest | Remark: Size cannot be determined |
| (2) | Utilities Type: Electricity | Size(mm): 0 | Location: On crest | Remark: Size cannot be determined |
| (3) | Utilities Type: Gas | Size(mm): 0 | Location: On crest | Remark: Size cannot be determined |
| (4) | Utilities Type: Sewer/Drain | Size(mm): 0 | Location: On crest | Remark: Size cannot be determined |
| (5) | Utilities Type: Water Main | Size(mm): 100 | Location: On crest | Remark: N/A |
| (6) | Utilities Type: Water Main | Size(mm): 150 | Location: On crest | Remark: N/A |



STAGE 1 STUDY REPORT

Inspected On:

Weather:

District: ME

Section No: 1-1

Height(m):

Type of Toe Facility: Horticulture garden

Distance from Toe(m): 0

Type of Crest Facility: Road/footpath with heavy traffic density

Distance from Crest(m): 0

Consequence Category:

Engineering Judgement:

Section No: 2-2

Type of Toe Facility:

Distance from Toe(m):

Type of Crest Facility:

Distance from Crest(m):

Consequence Category:

Engineering Judgement:



Sign of Seepage:

Criterion A satisfied:

Sign of Distress:

Criterion D satisfied:

Non-routine maintenance required:

Note:

Masonry wall/Masonry facing:

Note:

Consequence category (for critical section):

Observations: N/A

Emergency Action Required:

Action By: N/A

ACTION TO INITIATE PREVENTIVE WORKS

Criterion A/Criterion D: N/A

Action By: N/A

Further Study:

Action By: N/A

OTHER EXTERNAL ACTION

Check / repair Services:

Action By: N/A

Non-routine Maintenance:

Action By: N/A

PHOTO







BASIC INFORMATION

Location: Southern part of Hing Keng Shek Village, Pak Sha Wan
Registration Date: 19-12-1997
Ranking Score (NPRS): 0 (EI)
Date of Formation: pre-1977
Date of Construction/ Modification:
Data Source: Project Office
Approximate Coordinates: Easting : 843982 Northing : 824693

CONSEQUENCE-TO-LIFE CATEGORY

Facility at Crest: Remote area or abandoned facilities
Distance of Facility from Crest (m): 0
Facility at Toe: Remote area or abandoned facilities
Distance of Facility from Toe (m): 0
Consequence-to-life Category: 3
Remarks: N/A

SLOPE PART

(1) Max. Height (m): 3.5 Length (m): 75 Average Angle (deg): 60

WALL PART

N/A

MAINTENANCE RESPONSIBILITY

(1) Sub Div.: 0 Government Feature Party: Lands D Agent: Lands D Land Cat.: 5b(vi) Reason Code: 62 MR Endorsement Date: 01-09-1998

DETAILS OF SLOPE / RETAINING WALL

Date of Inspection: 04-12-2018
Data Source: Project Office
Slope Part Drainage: N/A
Wall Part Drainage: N/A

SLOPE PART

Slope Part (1)
Surface Protection (%): Bare: 0 Vegetated: 100 Chunam: 0 Shotcrete: 0 Other Cover: 0
Material Description: Material type: Soil Geology: N/A
Berm: No. of Berms: N/A Min. Berm Width (m): N/A
Weepholes: Size (mm): N/A Spacing (m): N/A



WALL PART

N/A

SERVICES

N/A

CHECKING STATUS INFORMATION

N/A

BACKGROUND INFORMATION


GIU Cell Ref.:	7SE25A8
Map Sheet Reference (1:1000):	7SE-25A
Aerial Photos:	N/A
Nearest Rainguage Station (Station Number):	Pak Kong Tsui Hang Special Area Management Centre(NS0)
Data Collected On:	04-12-2018
Date of Construction, Subsequent Modification and Demolition:	N/A
Related Reports/Files or Documents:	N/A
Remarks:	N/A
Follow Up Actions:	N/A
DH-Order (To Be Confirmed with Buildings Department):	None
Advisory Letter (To Be Confirmed with Buildings Department):	None
LPMIS:	None

ENHANCED MAINTENANCE INFORMATION

From Maintenance Department: (Last Updated Date: 25/09/2025)

STAGE 1 STUDY REPORT

Inspected On: 13-03-1997
 Weather: Mainly Fine
 District: ME

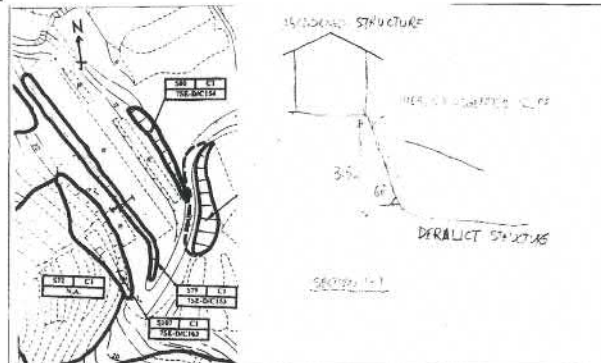

Section No: 1-1
 Height(m): H1 : 4 , H2 : 0
 Type of Toe Facility: Remote area or abandoned facilities
 Distance from Toe(m): 0
 Type of Crest Facility: Remote area or abandoned facilities
 Distance from Crest(m): 0
 Consequence Category: 3
 Engineering Judgement: P
 Section No: 2-2
 Type of Toe Facility: N/A
 Distance from Toe(m): 0
 Type of Crest Facility: N/A
 Distance from Crest(m): 0
 Consequence Category: 3
 Engineering Judgement: P
 Sign of Seepage: Slope : No signs of seepage
 Wall : N/A
 Criterion A satisfied: N
 Sign of Distress: Slope : Reasonable (mid-portion)
 Wall : N/A
 Criterion D satisfied: N
 Non-routine maintenance required: N
 Note: N/A
 Masonry wall/Masonry facing: N
 Note: N/A
 Consequence category (for critical section): 3
 Observations: N/A
 Emergency Action Required: N
 Action By: N/A



ACTION TO INITIATE PREVENTIVE WORKS

Criterion A/Criterion D:	N/A
Action By:	N/A
Further Study:	Y
Action By:	Mixed

OTHER EXTERNAL ACTION

Check / repair Services:	N
Action By:	N/A
Non-routine Maintenance:	N
Action By:	N/A

PHOTO






SLOPE INFORMATION SYSTEM

GEOTECHNICAL ENGINEERING OFFICE
CIVIL ENGINEERING AND DEVELOPMENT DEPARTMENT

Feature No. 7SE-D/C 153

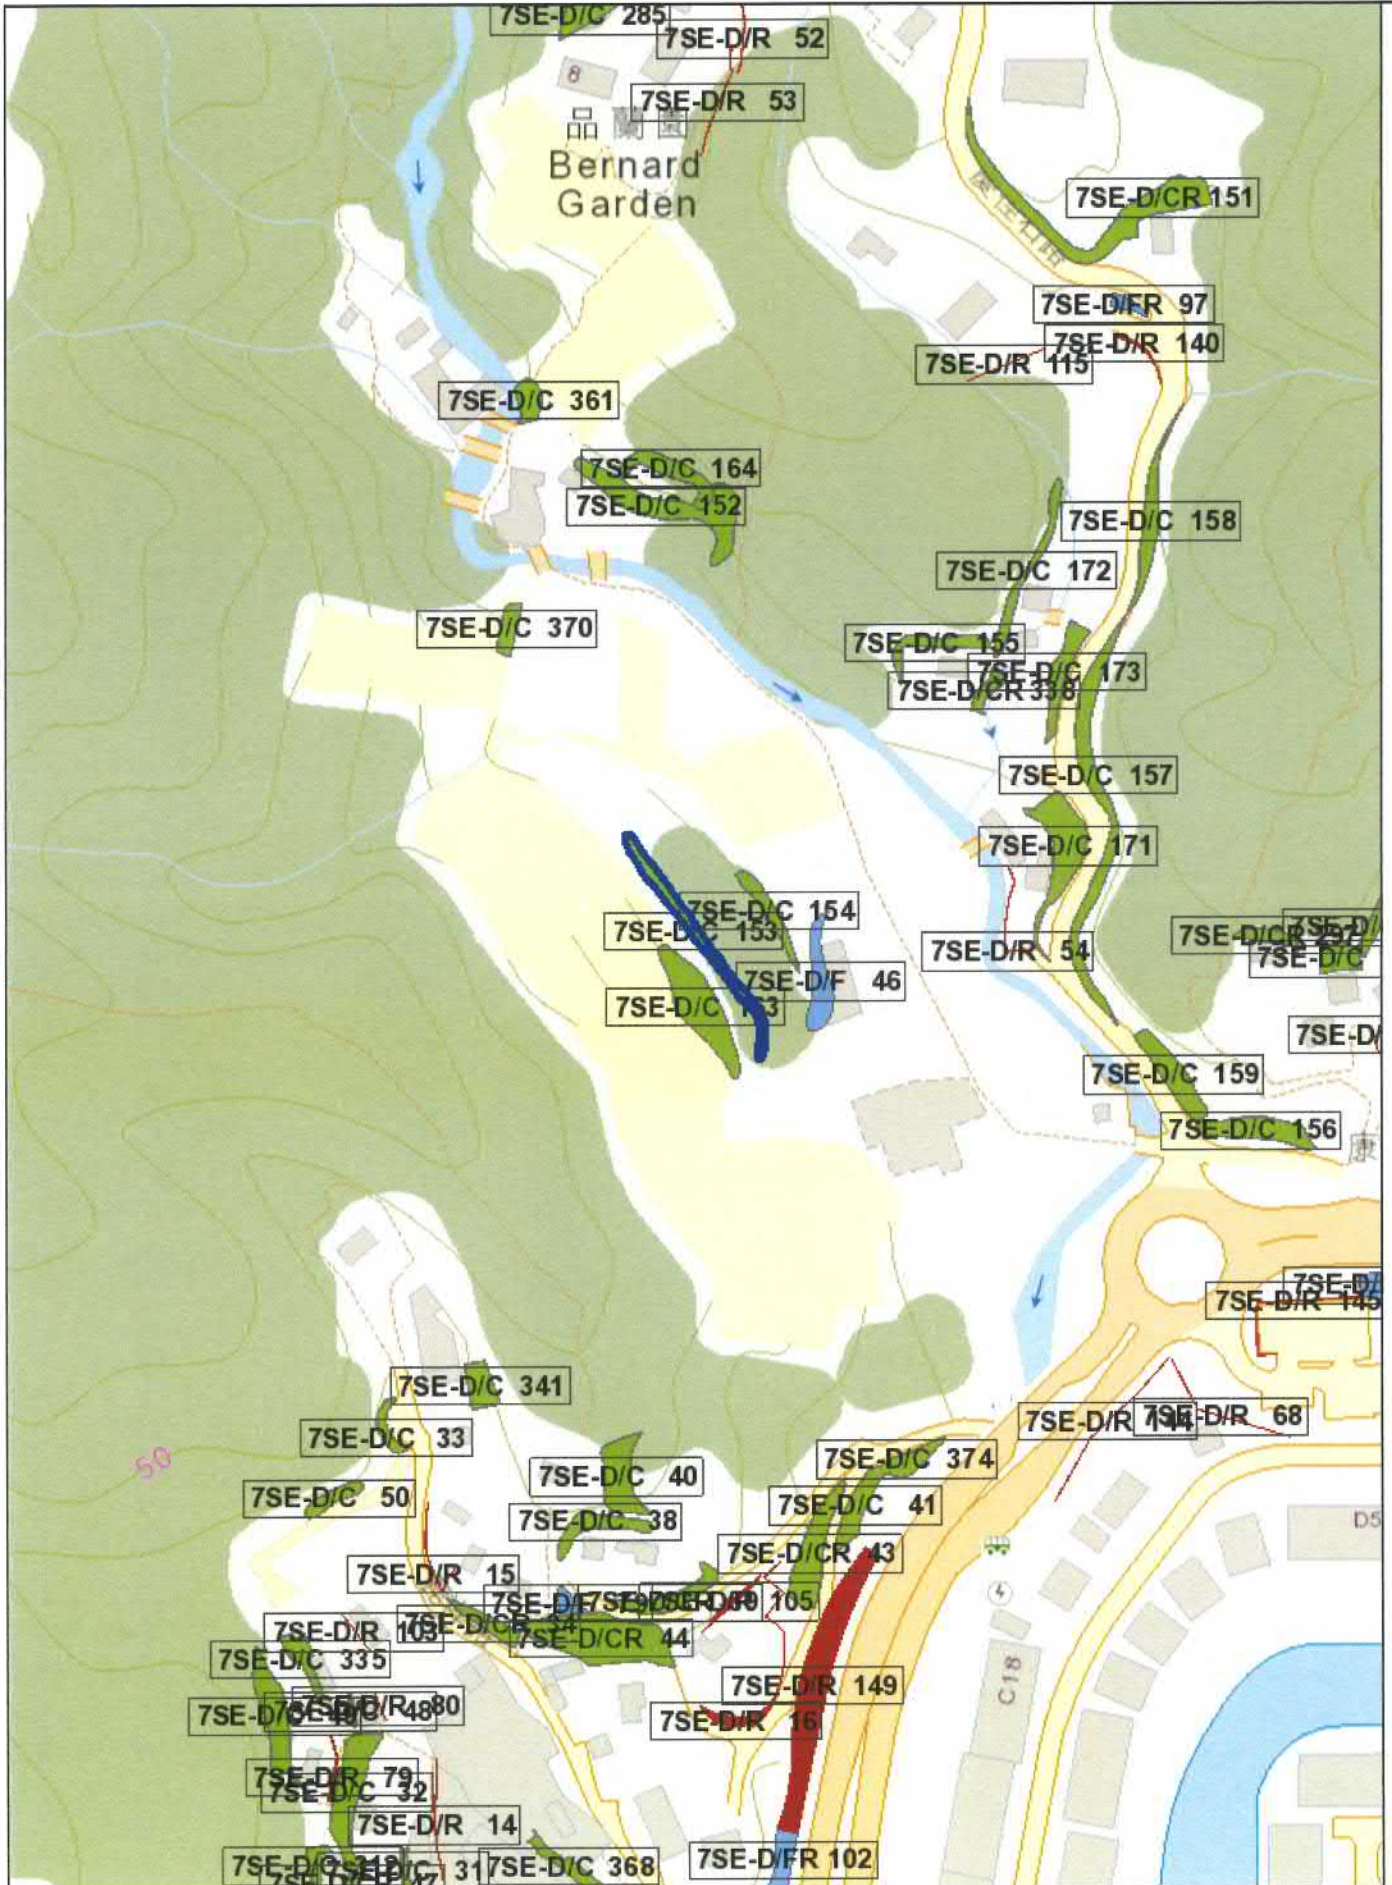

BASIC INFORMATION

Location: Hing Keng Shek Road, Sai Kung
Registration Date: 19-12-1997
Ranking Score (NPRS): 0 (EI)
Date of Formation: pre-1977
Date of Construction/ Modification: 17-03-2010
Data Source: Project Office
Approximate Coordinates: Easting : 844072 Northing : 824698

CONSEQUENCE-TO-LIFE CATEGORY

Facility at Crest: Cottage, licensed and squatter area
Distance of Facility from Crest (m): 3
Facility at Toe: Catchwater w/consequence on Group 5 facilities
Distance of Facility from Toe (m): 0
Consequence-to-life Category: 1
Remarks: N/A

SLOPE PART

N/A

WALL PART

(1) Max. Height (m): 4.4 Length (m): 30 Face Angle (deg): 85

MAINTENANCE RESPONSIBILITY

(1) Sub Div.: 0 Government Feature Party: Lands D Agent: Lands D Land Cat.: 5b(vi) Reason Code: 62 MR Endorsement Date: 22-03-2011

DETAILS OF SLOPE / RETAINING WALL

Date of Inspection: 12-02-2019
Data Source: Project Office
Slope Part Drainage: N/A
Wall Part Drainage: N/A

SLOPE PART

N/A

WALL PART

**Wall Part (1)**

Type of Wall:	Wall Material: Concrete	Wall Location: Retaining wall with level platform
Berm:	No. of Berms: N/A	Min. Berm Width (m): N/A
Weepholes:	Size (mm): 75	Spacing (m): 1.5

SERVICES

N/A

CHECKING STATUS INFORMATION

Tagmark: SCS_14115 Part: 0 Checking Status: Feature modified/upgraded to current standard Checking Certificate No.: GEO/ME 085/2011

BACKGROUND INFORMATION


GIU Cell Ref.:	7SE25A9
Map Sheet Reference (1:1000):	7SE-25A
Aerial Photos:	9301 (1974), 9302 (1974)
Nearest Rainguage Station (Station Number):	Pak Kong Tsui Hang Special Area Management Centre(N50)
Data Collected On:	12-02-2019
Date of Construction, Subsequent Modification and Demolition:	Modification: Constructed Before: 1974 After: 1962
Related Reports/Files or Documents:	N/A
Remarks:	N/A
Follow Up Actions:	N/A
DH-Order (To Be Confirmed with Buildings Department):	None
Advisory Letter (To Be Confirmed with Buildings Department):	None
LPMIS:	None

ENHANCED MAINTENANCE INFORMATION

From Maintenance Department: (Last Updated Date: 25/09/2025)

STAGE 1 STUDY REPORT

Inspected On: 13-03-1997
 Weather: Mainly Fine
 District: ME

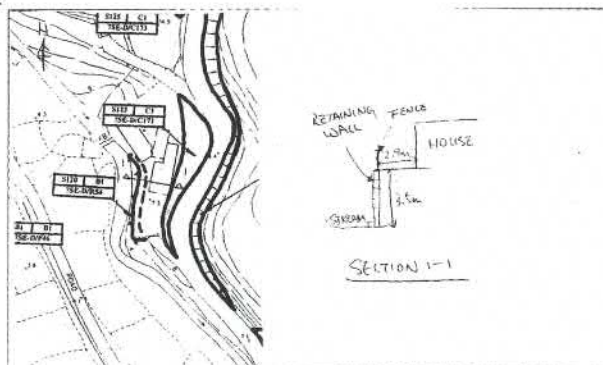

Section No: 1-1
 Height(m): H1 : 4 , H2 : 4
 Type of Toe Facility: Catchwater w/consequence on Group 5 facilities
 Distance from Toe(m): 0
 Type of Crest Facility: Cottage, licensed and squatter area
 Distance from Crest(m): 3
 Consequence Category: 1
 Engineering Judgement: P
 Section No: 2-2
 Type of Toe Facility:
 Distance from Toe(m):
 Type of Crest Facility:
 Distance from Crest(m):
 Consequence Category: 1
 Engineering Judgement: P
 Sign of Seepage: Slope : N/A
 Wall : Signs of seepage
 Criterion A satisfied: N
 Sign of Distress: Slope : N/A
 Wall : Moderate(mid-portion, at toe)
 Criterion D satisfied: N
 Non-routine maintenance required: N
 Note: N/A
 Masonry wall/Masonry facing: Y
 Note: N/A
 Consequence category (for critical section): 1
 Observations: N/A
 Emergency Action Required: N
 Action By: N/A



ACTION TO INITIATE PREVENTIVE WORKS

Criterion A/Criterion D:	N/A
Action By:	N/A
Further Study:	Y
Action By:	Mixed

OTHER EXTERNAL ACTION

Check / repair Services:	N
Action By:	N/A
Non-routine Maintenance:	N
Action By:	N/A

PHOTO





BASIC INFORMATION

Location: 60A Pak Wai, Sai Kung
 Date of Formation: pre-1977
 Date of Construction/ Modification: 20-12-2008
 Approximate Coordinates: Easting : 844088 Northing : 824712

CONSEQUENCE-TO-LIFE CATEGORY

Facility at Crest: Road/footpath with low traffic density
 Distance of Facility from Crest (m): 0
 Facility at Toe: Cottage, licensed and squatter area
 Distance of Facility from Toe (m): 0.5
 Consequence-to-life Category: 1
 Remarks: N/A

SLOPE PART

(1) Max. Height (m): 7.1 Length (m): 52 Average Angle (deg): 33

WALL PART

N/A

MAINTENANCE RESPONSIBILITY

Maintenance Type: Government Party: Lands D Agent: Lands D

DETAILS OF SLOPE / RETAINING WALL

Date of Inspection: 12-04-2019
 Data Source: Project Office
 Slope Part Drainage: (1) Position: Toe Size(mm): 300
 Wall Part Drainage: (1) Position: Crest Size(mm): 200

SLOPE PART

Slope Part (1)
 Surface Protection (%): Bare: 0 Vegetated: 60 Chunam: 0 Shotcrete: 40 Other Cover: 0
 Material Description: Material type: Soil Geology: N/A
 Berm: No. of Berms: N/A Min. Berm Width (m): N/A
 Weepholes: Size (mm): 75 Spacing (m): 1.5

WALL PART


N/A

SERVICES

(1)	Utilities Type: Water Main	Size (mm): 20	Location: On crest	Remark: N/A
(2)	Utilities Type: Water Main	Size (mm): 20	Location: On slope	Remark: N/A

STAGE 1 STUDY REPORT

Inspected On: 13-03-1997
Weather: Mainly Fine
District: ME

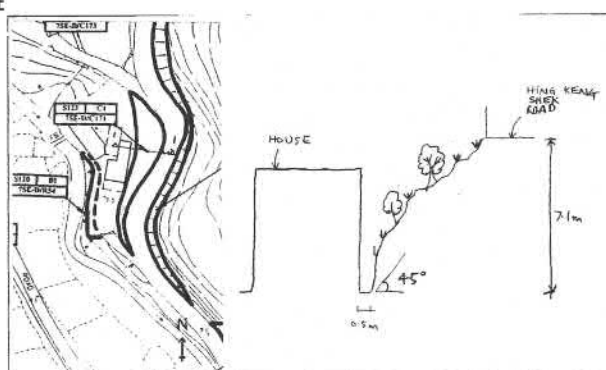

Section No: 1-1
Height (m): N/A
Type of Toe Facility: Cottage, licensed and squatter area
Distance from Toe (m): 0.5
Type of Crest Facility: Road/footpath with low traffic density
Distance from Crest (m): 0
Consequence Category: 1
Engineering Judgement: P
Section No: 2-2
Type of Toe Facility: N/A
Distance from Toe (m): 0
Type of Crest Facility: N/A
Distance from Crest (m): 0
Consequence Category: 1
Engineering Judgement: P
Sign of Seepage: Slope : Signs of seepage
Wall : N/A
Criterion A satisfied: N
Sign of Distress: Slope : Reasonable (near crest, mid-portion)
Wall : N/A
Criterion D satisfied: N
Non-routine maintenance required: N
Note: N/A



Masonry wall / Masonry facing: N
Note: N/A
Consequence category (for critical section): 1
Observations: N/A
Emergency Action Required: N
Action By: N/A

ACTION TO INITIATE PREVENTIVE WORKS


Criterion A / Criterion D: N/A
Action By: N/A
Further Study: Y
Action By: Mixed

OTHER EXTERNAL ACTION

Check / repair Services: N
Action By: N/A
Non-routine Maintenance: N
Action By: N/A

PHOTO



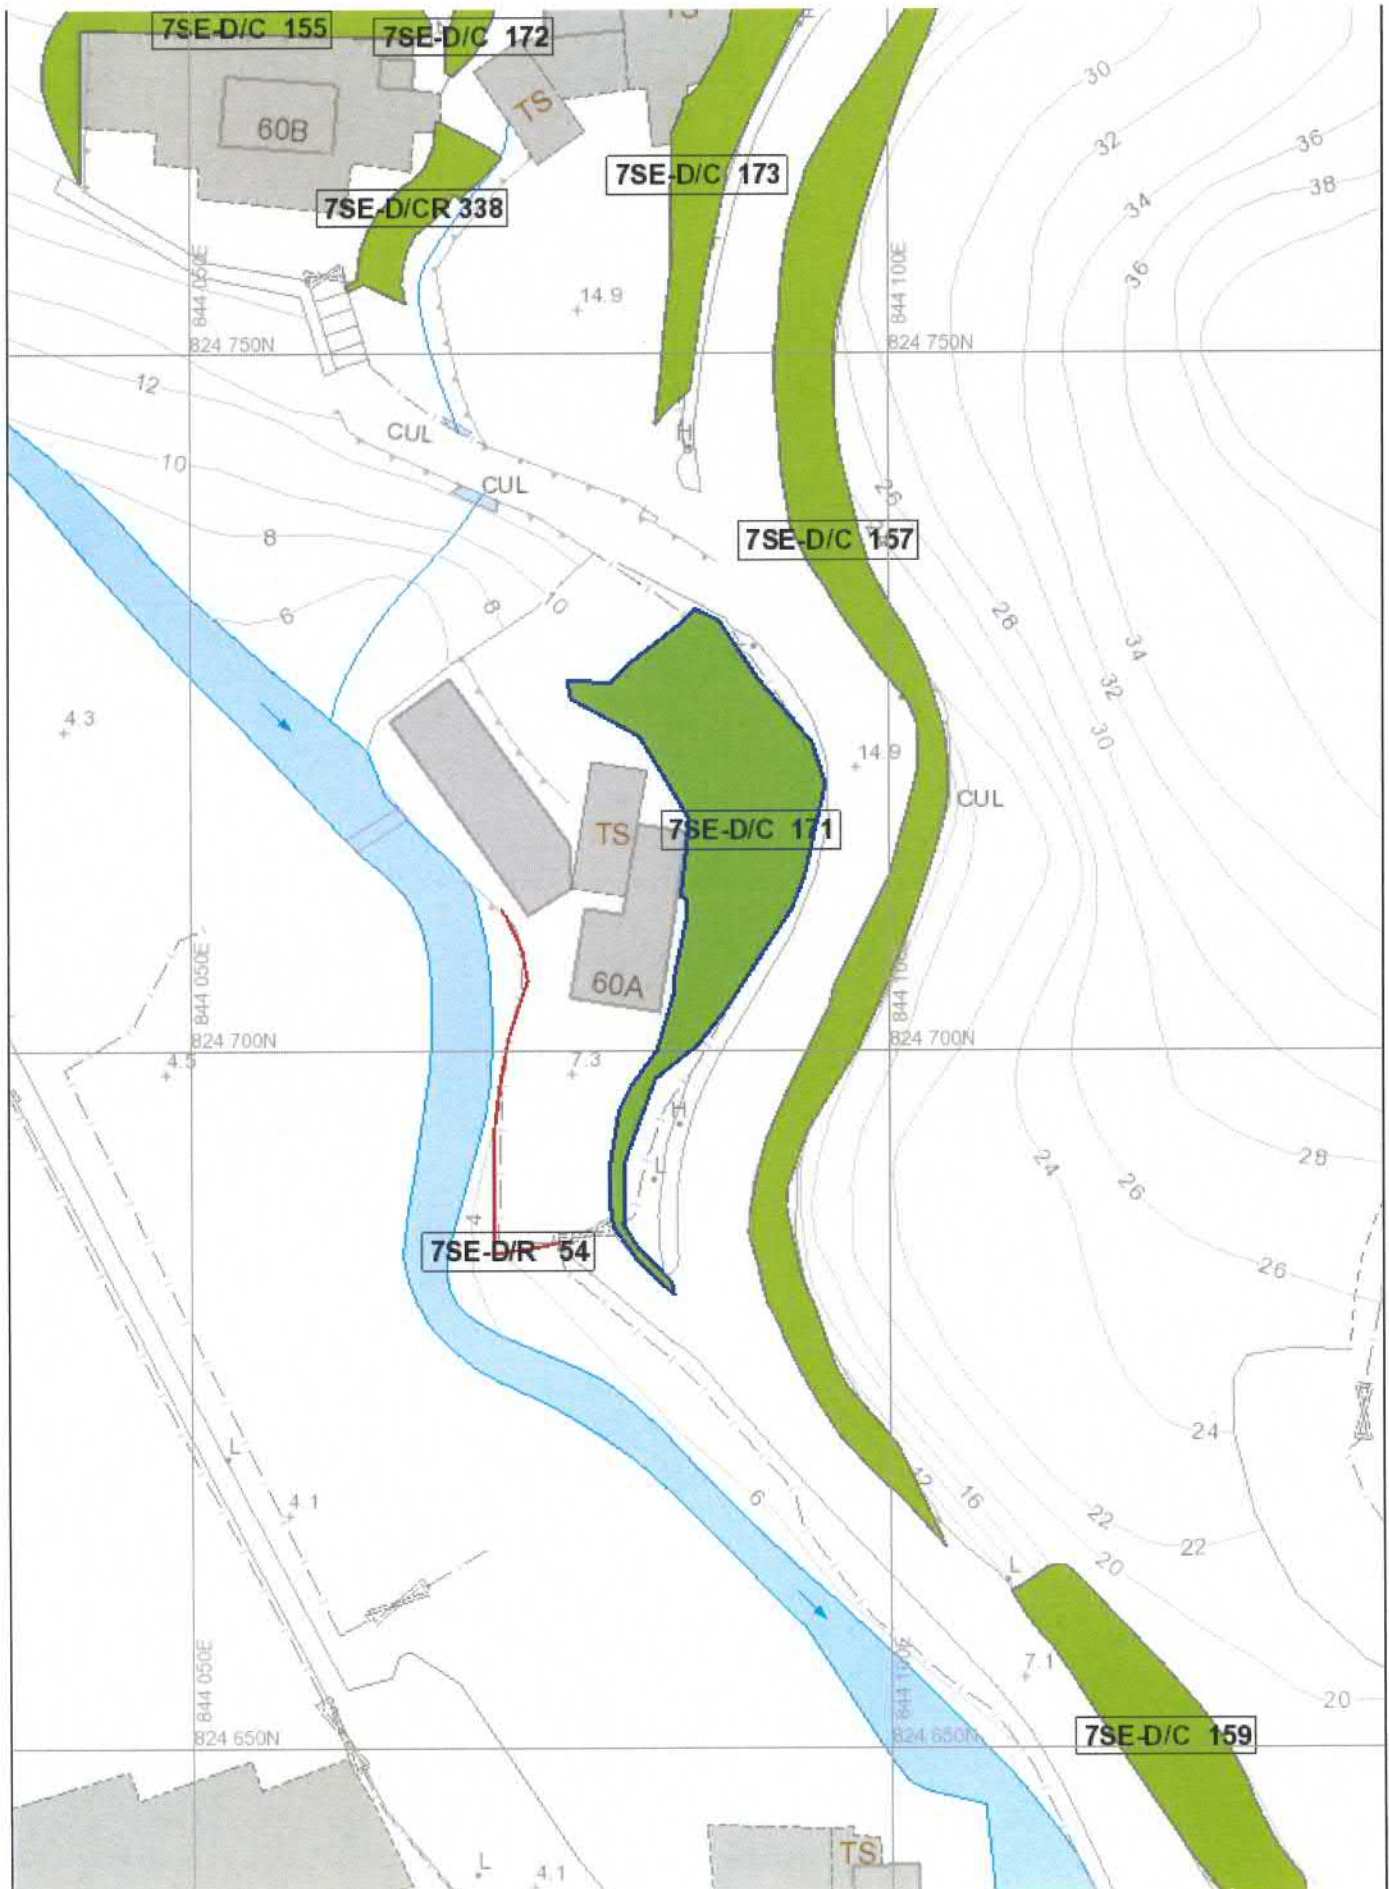



BASIC INFORMATION

Location: Southern part of Hing Keng Shek Village
Registration Date: 19-12-1997
Ranking Score (NPRS): 0 (EI)
Date of Formation: pre-1977
Date of Construction/ Modification:
Data Source: Project Office
Approximate Coordinates: Easting : 843985 Northing : 824668

CONSEQUENCE-TO-LIFE CATEGORY

Facility at Crest: Undeveloped green belt
Distance of Facility from Crest (m): 0
Facility at Toe: Lightly-used playground
Distance of Facility from Toe (m): 1
Consequence-to-life Category: 3
Remarks: TGN 15 case - provided by SP Division (31 MAR 2004)

SLOPE PART

(1) Max. Height (m): 9 Length (m): 45 Average Angle (deg): 45

WALL PART

N/A

MAINTENANCE RESPONSIBILITY

(1) Sub Div.: 0 Government Feature Party: Lands D Agent: Lands D Land Cat.: 5b(vi) Reason Code: 62 MR Endorsement Date: 05-05-1998

DETAILS OF SLOPE / RETAINING WALL

Date of Inspection: 13-11-2008
Data Source: Project Office
Slope Part Drainage: N/A
Wall Part Drainage: N/A

SLOPE PART

Slope Part (1)
Surface Protection (%): Bare: 0 Vegetated: 100 Chunam: 0 Shotcrete: 0 Other Cover: 0
Material Description: Material type: Soil Geology: Decomposed volcanic
Berm: No. of Berms: N/A Min. Berm Width (m): N/A
Weepholes: Size (mm): N/A Spacing (m): N/A

WALL PART

N/A

SERVICES

N/A

CHECKING STATUS INFORMATION

N/A

BACKGROUND INFORMATION


GIU Cell Ref.:	7SE25A8
Map Sheet Reference (1:1000):	7SE-25A
Aerial Photos:	9301 (1974), 9302 (1974)
Nearest Rainuage Station (Station Number):	Pak Kong Tsui Hang Special Area Management Centre(N50)
Data Collected On:	13-11-2008
Date of Construction, Subsequent Modification and Demolition:	Modification: Constructed Before: 1974 After: 1968
Related Reports/Files or Documents:	N/A
Remarks:	N/A
Follow Up Actions:	N/A
DH-Order (To Be Confirmed with Buildings Department):	None
Advisory Letter (To Be Confirmed with Buildings Department):	None
LPMIS:	None

ENHANCED MAINTENANCE INFORMATION

From Maintenance Department: (Last Updated Date: 25/09/2025)

STAGE 1 STUDY REPORT

Inspected On: 13-03-1997
 Weather: Mainly Fine
 District: ME

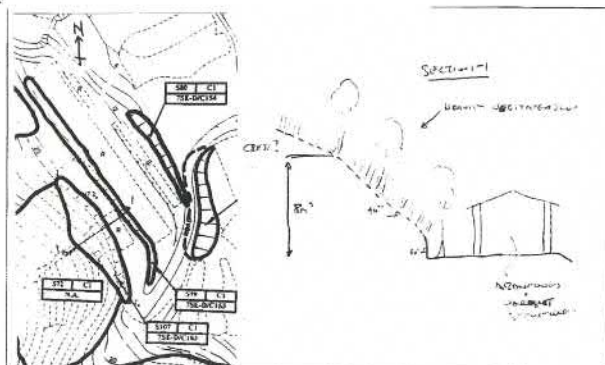

Section No: 1-1
 Height(m): H1 : 8 , H2 : 0
 Type of Toe Facility: Lightly-used playground
 Distance from Toe(m): 1
 Type of Crest Facility: Undeveloped green belt
 Distance from Crest(m): 0
 Consequence Category: 1
 Engineering Judgement: P
 Section No: 2-2
 Type of Toe Facility: N/A
 Distance from Toe(m): 0
 Type of Crest Facility: N/A
 Distance from Crest(m): 0
 Consequence Category: 1
 Engineering Judgement: P
 Sign of Seepage: Slope : No signs of seepage
 Wall : N/A
 Criterion A satisfied: N
 Sign of Distress: Slope : Minor (mid-portion)
 Wall : N/A
 Criterion D satisfied: N
 Non-routine maintenance required: N
 Note: N/A
 Masonry wall/Masonry facing: N
 Note: N/A
 Consequence category (for critical section): 1
 Observations: TGN 15 case - provided by SP Division (31 MAR 2004)
 Emergency Action Required: N
 Action By: N/A



ACTION TO INITIATE PREVENTIVE WORKS

Criterion A/Criterion D:	N/A
Action By:	N/A
Further Study:	Y
Action By:	Mixed

OTHER EXTERNAL ACTION

Check / repair Services:	N
Action By:	N/A
Non-routine Maintenance:	N
Action By:	N/A

PHOTO





BASIC INFORMATION

Location: Northwest of Marina Cove and West of Hing Keng Shek Road, Southwest Sai Kung
Registration Date: 15-05-2019
Ranking Score (NPRS): 17 (LPMit)
Date of Formation: post-1977
Date of Construction/ Modification:
Data Source: Project Office
Approximate Coordinates: Easting : 843930 Northing : 824779

CONSEQUENCE-TO-LIFE CATEGORY

Facility at Crest: Undeveloped green belt
Distance of Facility from Crest (m): 0
Facility at Toe: Cottage, licensed and squatter area
Distance of Facility from Toe (m): 0.5
Consequence-to-life Category: 1
Remarks: N/A

SLOPE PART

(1) Max. Height (m): 3.8 Length (m): 16 Average Angle (deg): 40

WALL PART

N/A

MAINTENANCE RESPONSIBILITY

(1) Sub Div.: 1 Mixed Feature Party: DD210 LOT 11 Agent: N/A Land Cat.: 1 Reason Code: 1 MR Endorsement Date: 19-10-2020
(2) Sub Div.: 2 Mixed Feature Party: Lands D Agent: Lands D Land Cat.: 5b(vi) Reason Code: 62 MR Endorsement Date: 19-10-2020

DETAILS OF SLOPE / RETAINING WALL

Date of Inspection: 31-12-2018
Data Source: Project Office
Slope Part Drainage: N/A
Wall Part Drainage: N/A

SLOPE PART

Slope Part (1)
Surface Protection (%): Bare: 0 Vegetated: 100 Chunam: 0 Shotcrete: 0 Other Cover: 0
Material Description: Material type: Soil Geology: N/A
Berm: No. of Berms: 1 Min. Berm Width (m): 0.8
Weepholes: Size (mm): N/A Spacing (m): N/A



WALL PART

N/A

SERVICES

N/A

CHECKING STATUS INFORMATION

N/A

BACKGROUND INFORMATION

GIU Cell Ref.:	N/A
Map Sheet Reference (1:1000):	N/A
Aerial Photos:	N/A
Nearest Rainguage Station (Station Number):	()
Data Collected On:	31-12-2018
Date of Construction, Subsequent Modification and Demolition:	N/A
Related Reports/Files or Documents:	N/A
Remarks:	N/A
Follow Up Actions:	N/A
DH-Order (To Be Confirmed with Buildings Department):	None
Advisory Letter (To Be Confirmed with Buildings Department):	None
LPMIS:	None

ENHANCED MAINTENANCE INFORMATION

From Maintenance Department: (Last Updated Date: 25/09/2025)



STAGE 1 STUDY REPORT

Inspected On:

Weather:

District: N/A

Section No: 1-1

Height(m):

Type of Toe Facility: Cottage, licensed and squatter area

Distance from Toe(m): 0.5

Type of Crest Facility: Undeveloped green belt

Distance from Crest(m): 0

Consequence Category:

Engineering Judgement:

Section No: 2-2

Type of Toe Facility:

Distance from Toe(m):

Type of Crest Facility:

Distance from Crest(m):

Consequence Category:

Engineering Judgement:

Sign of Seepage:

Criterion A satisfied:

Sign of Distress:

Criterion D satisfied:

Non-routine maintenance required:

Note:

Masonry wall/Masonry facing:

Note:

Consequence category (for critical section):

Observations: N/A

Emergency Action Required:

Action By: N/A

ACTION TO INITIATE PREVENTIVE WORKS

Criterion A/Criterion D: N/A

Action By: N/A

Further Study:

Action By: N/A

OTHER EXTERNAL ACTION

Check / repair Services:

Action By: N/A

Non-routine Maintenance:




Action By:

N/A

PHOTO



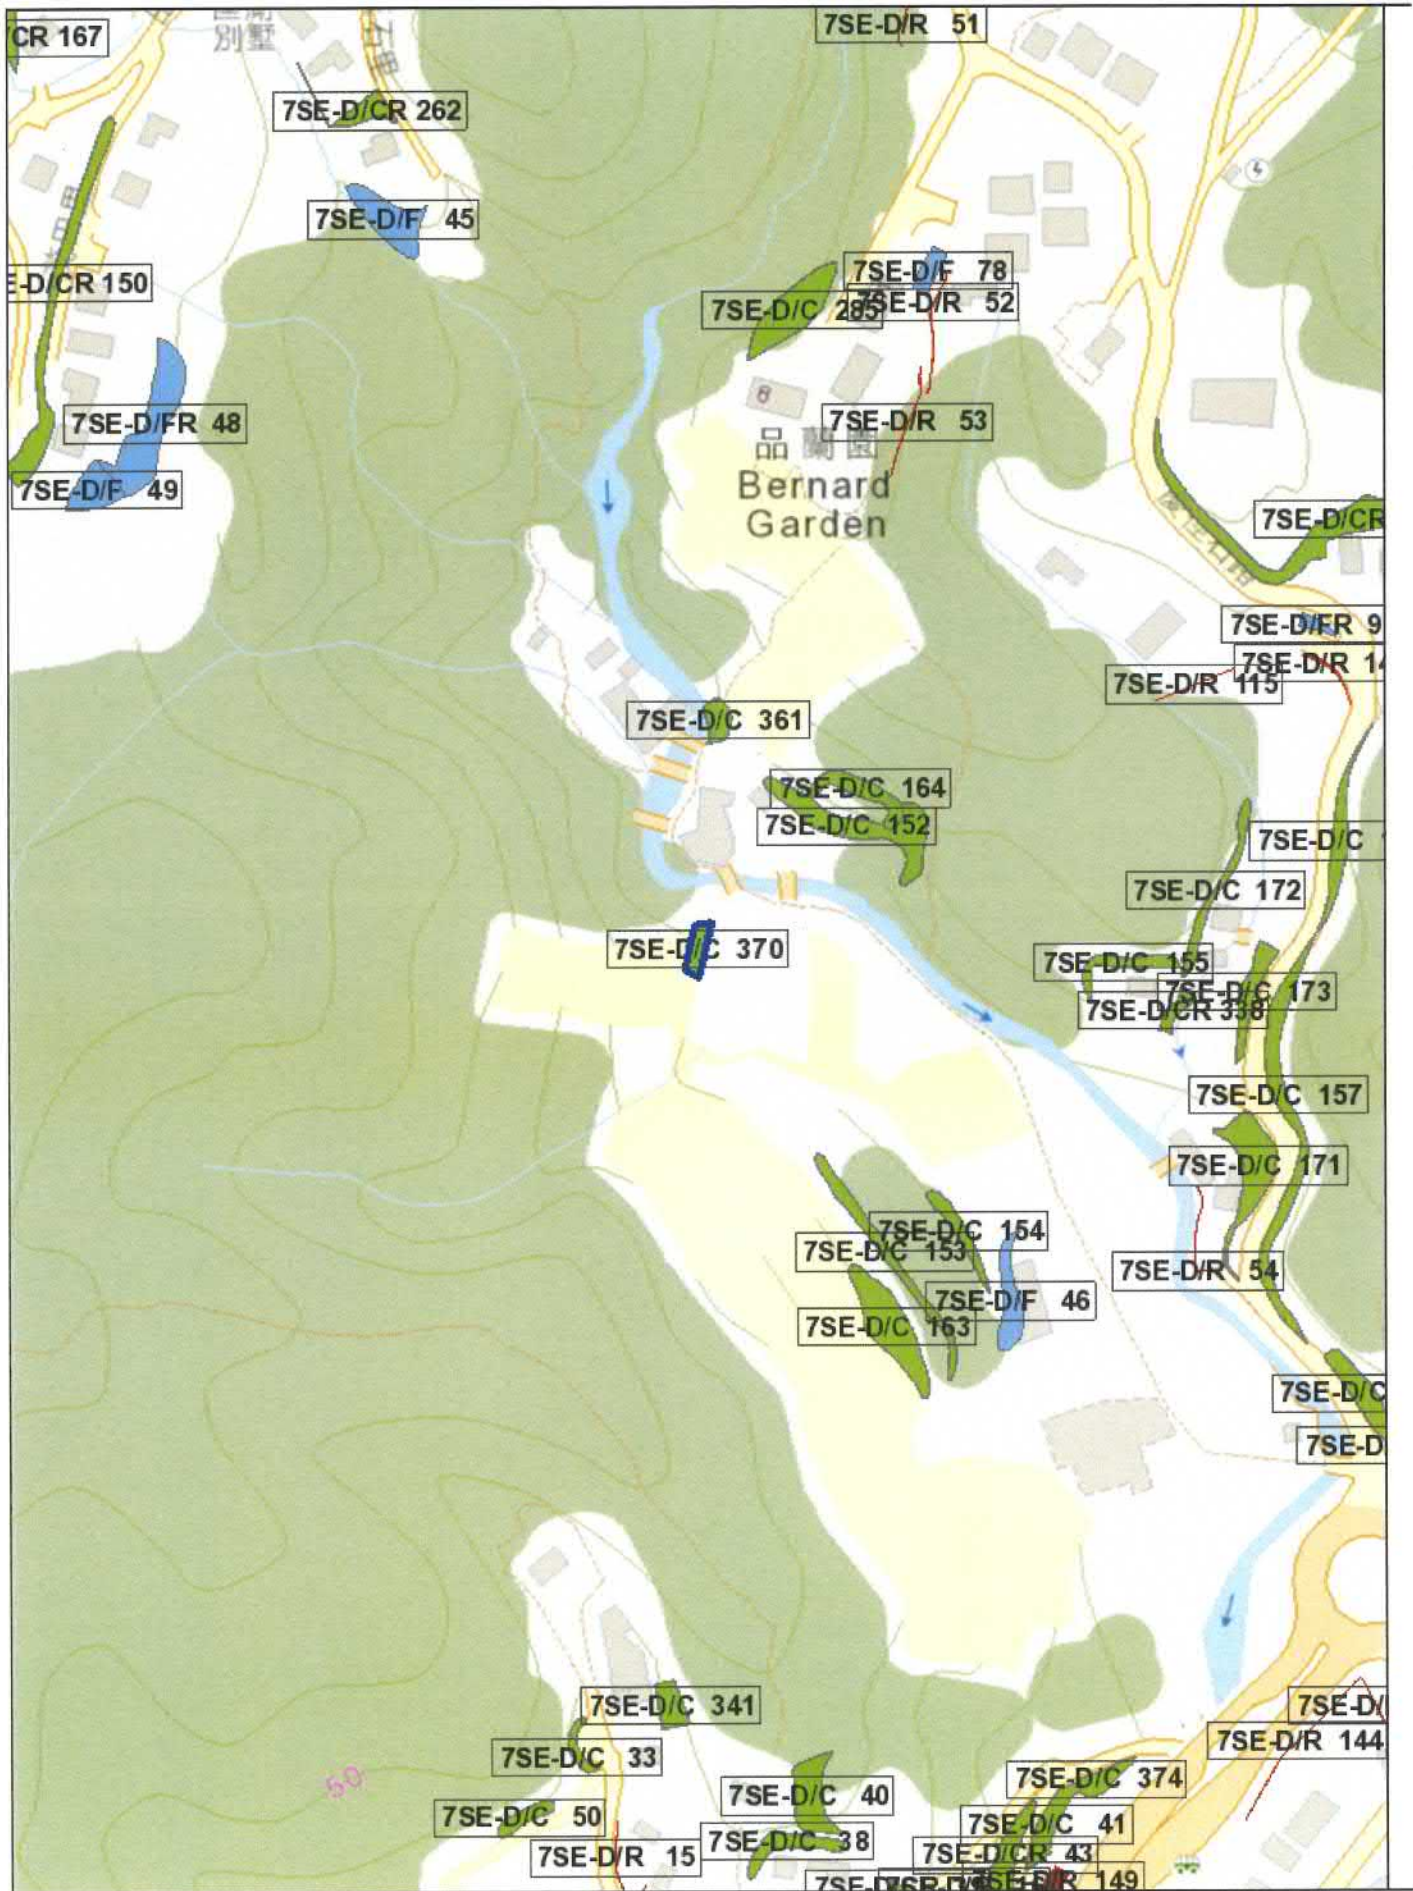



BASIC INFORMATION

Location: HING KENG SHEK ROAD, SAI KUNG
Date of Formation: pre-1977
Date of Construction/ Modification: N/A
Approximate Coordinates: Easting : 844098 Northing : 824731

CONSEQUENCE-TO-LIFE CATEGORY

Facility at Crest: Undeveloped green belt
Distance of Facility from Crest (m): 0
Facility at Toe: Road/footpath with low traffic density
Distance of Facility from Toe (m): 0
Consequence-to-life Category: 3
Remarks: N/A

SLOPE PART

(1) Max. Height (m): 6 Length (m): 125 Average Angle (deg): 70

WALL PART

N/A

MAINTENANCE RESPONSIBILITY

Maintenance Type: Government Party: Lands D Agent: Lands D

DETAILS OF SLOPE / RETAINING WALL

Date of Inspection: 12-03-1997
Data Source: SIRST
Slope Part Drainage: (1) Position: Stepped Size(mm): 251
Wall Part Drainage: N/A

SLOPE PART

Slope Part (1)
Surface Protection (%): Bare: 20 Vegetated: 75 Chunam: 5 Shotcrete: 0 Other Cover: 0
Material Description: Material type: Soil & Rock Geology: Decomposed volcanic
Berm: No. of Berms: N/A Min. Berm Width (m): N/A
Weepholes: Size (mm): N/A Spacing (m): N/A

WALL PART


N/A

SERVICES

N/A

STAGE 1 STUDY REPORT

Inspected On: 12-03-1997
 Weather: Mainly Fine
 District: ME



Section No: 1-1
 Height (m): N/A
 Type of Toe Facility: Road/footpath with low traffic density
 Distance from Toe (m): 0
 Type of Crest Facility: Undeveloped green belt
 Distance from Crest (m): 0
 Consequence Category: 3
 Engineering Judgement: P
 Section No: 2-2
 Type of Toe Facility: N/A
 Distance from Toe (m): 0
 Type of Crest Facility: N/A
 Distance from Crest (m): 0
 Consequence Category: 3
 Engineering Judgement: P
 Sign of Seepage: Slope : No signs of seepage
 Wall : N/A
 Criterion A satisfied: N
 Sign of Distress: Slope : Minor (mid-portion, at toe)
 Wall : N/A
 Criterion D satisfied: N
 Non-routine maintenance required: N
 Note: N/A
 Masonry wall / Masonry facing: N



Note:	N/A
Consequence category (for critical section):	3
Observations:	N/A
Emergency Action Required:	N
Action By:	N/A

ACTION TO INITIATE PREVENTIVE WORKS

Criterion A / Criterion D:	N/A
Action By:	N/A
Further Study:	Y
Action By:	Mixed

OTHER EXTERNAL ACTION

Check / repair Services:	N
Action By:	N/A
Non-routine Maintenance:	N
Action By:	N/A

PHOTO



7SE-D/C157

General View





BASIC INFORMATION

Location: ADJACENT HING KENG SHEK ROAD, PAK WAI VILLAGE, SAI KUNG.
Date of Formation: pre-1977
Date of Construction/ Modification: N/A
Approximate Coordinates: Easting : 844120 Northing : 824650

CONSEQUENCE-TO-LIFE CATEGORY

Facility at Crest: Undeveloped green belt
Distance of Facility from Crest (m): 0
Facility at Toe: Road/footpath with very low traffic density
Distance of Facility from Toe (m): 0
Consequence-to-life Category: 3
Remarks: N/A

SLOPE PART

(1) Max. Height (m): 6 Length (m): 28 Average Angle (deg): 60

WALL PART

N/A

MAINTENANCE RESPONSIBILITY

Maintenance Type: Government Party: Lands D Agent: Lands D

DETAILS OF SLOPE / RETAINING WALL

Date of Inspection: 14-04-2025
Data Source: Project Office
Slope Part Drainage: N/A
Wall Part Drainage: N/A

SLOPE PART

Slope Part (1)
Surface Protection (%): Bare: 0 Vegetated: 0 Chunam: 0 Shotcrete: 100 Other Cover: 0
Material Description: Material type: Soil & Rock Geology: N/A
Berm: No. of Berms: N/A Min. Berm Width (m): N/A
Weepholes: Size (mm): N/A Spacing (m): N/A

WALL PART


N/A

SERVICES

N/A

STAGE 1 STUDY REPORT

Inspected On: 13-03-1997
 Weather: Mainly Fine
 District: ME

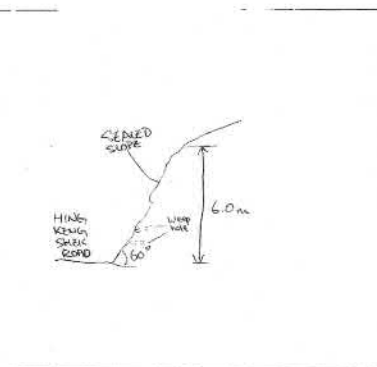

Section No: 1-1
 Height (m): N/A
 Type of Toe Facility: Road/footpath with very low traffic density
 Distance from Toe (m): 0
 Type of Crest Facility: Undeveloped green belt
 Distance from Crest (m): 0
 Consequence Category: 3
 Engineering Judgement: P
 Section No: 2-2
 Type of Toe Facility: N/A
 Distance from Toe (m): 0
 Type of Crest Facility: N/A
 Distance from Crest (m): 0
 Consequence Category: 3
 Engineering Judgement: P
 Sign of Seepage: Slope : No signs of seepage
 Wall : N/A
 Criterion A satisfied: N
 Sign of Distress: Slope : N/A
 Wall : N/A
 Criterion D satisfied: N
 Non-routine maintenance required: N
 Note: N/A
 Masonry wall / Masonry facing: N



Note:	N/A
Consequence category (for critical section):	3
Observations:	N/A
Emergency Action Required:	N
Action By:	N/A

ACTION TO INITIATE PREVENTIVE WORKS


Criterion A / Criterion D:	N/A
Action By:	N/A
Further Study:	Y
Action By:	Mixed

OTHER EXTERNAL ACTION

Check / repair Services:	N
Action By:	N/A
Non-routine Maintenance:	N
Action By:	N/A

PHOTO



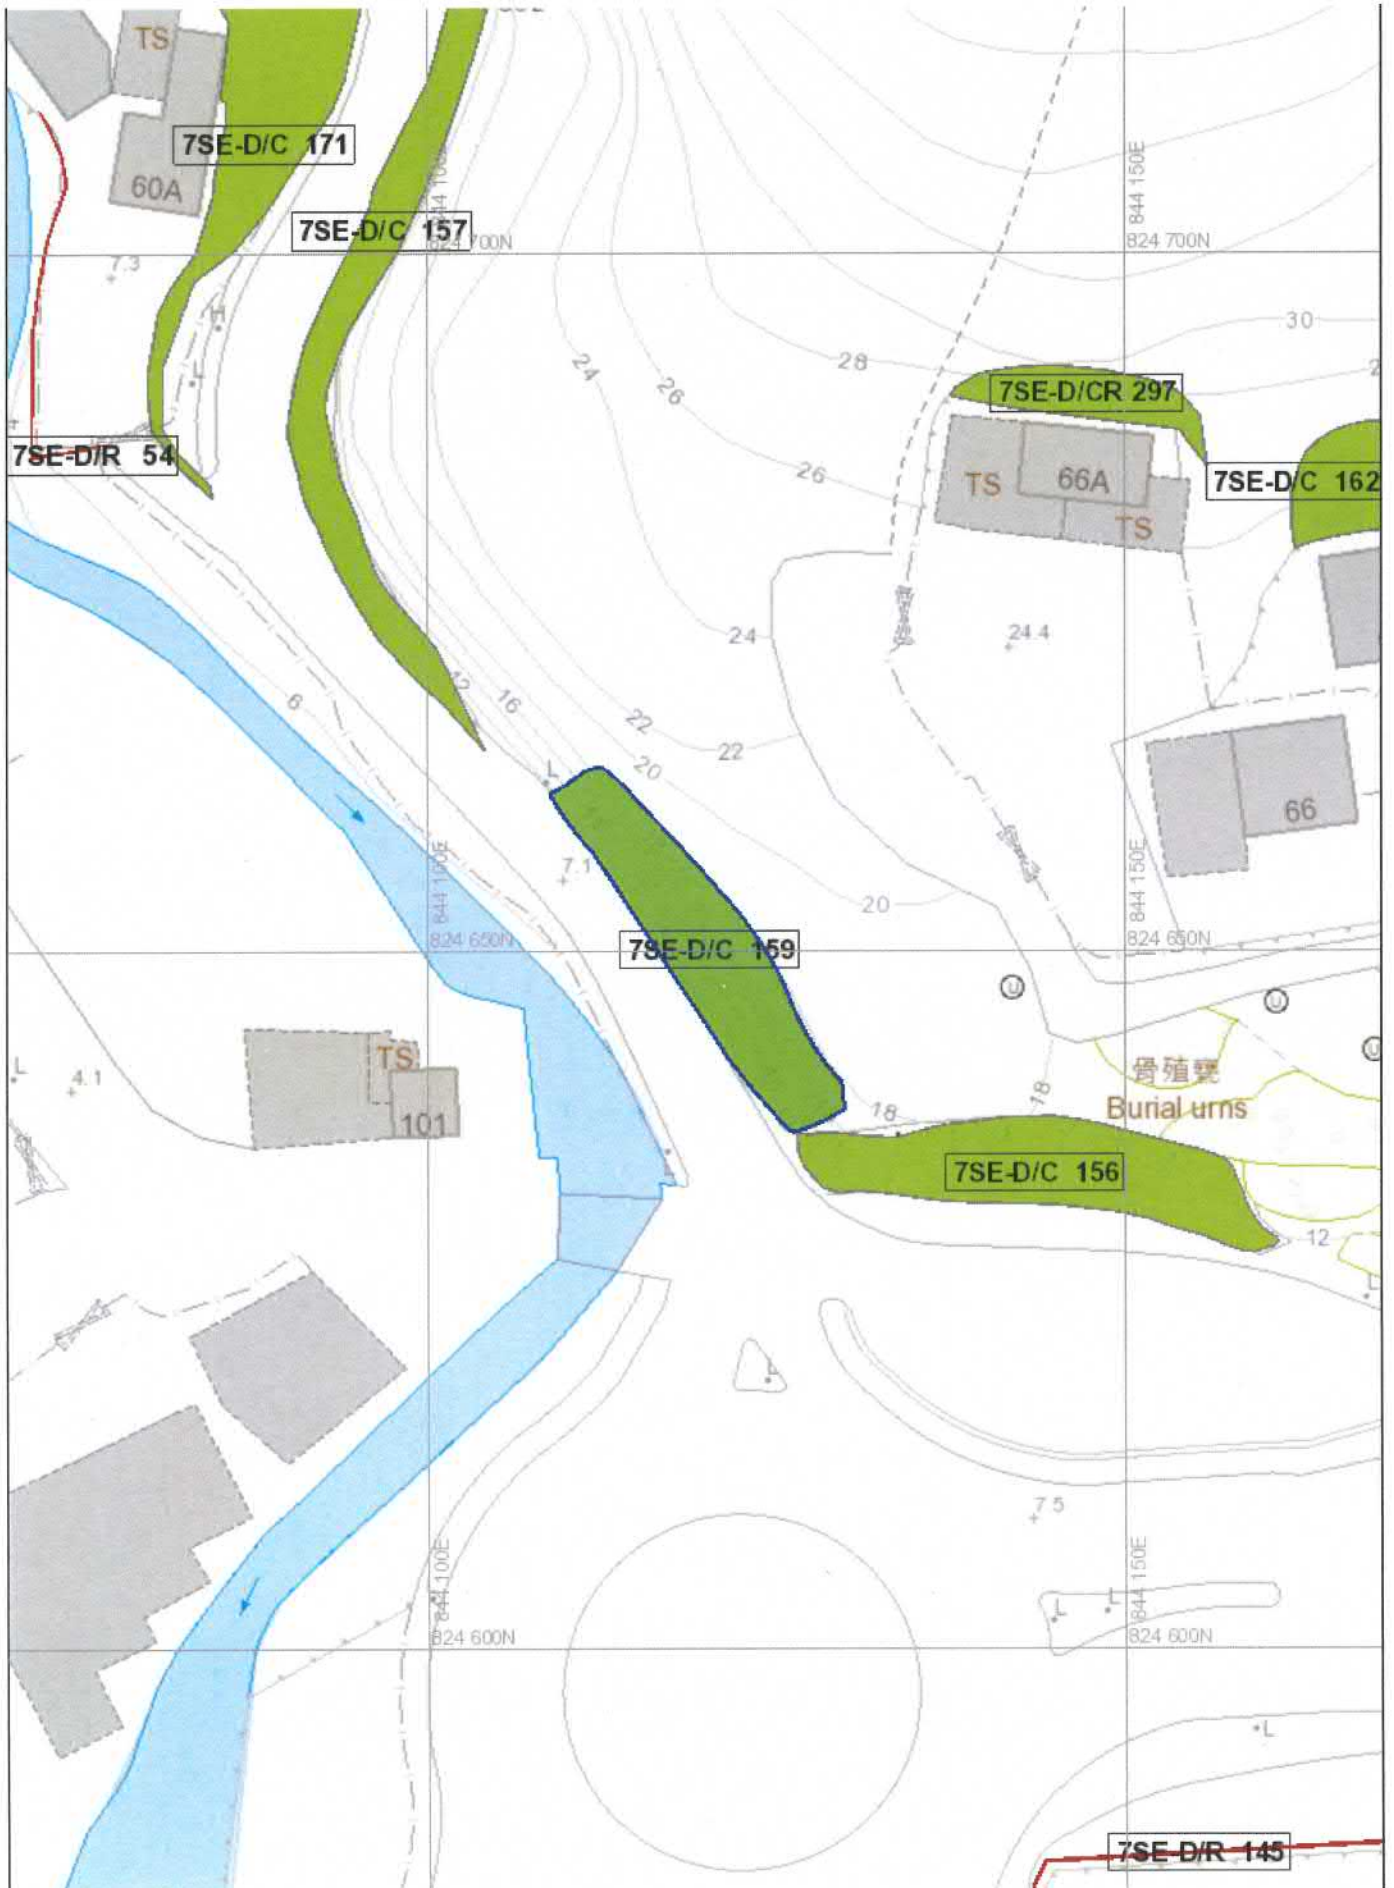

BASIC INFORMATION

Location: West of Hing Keng Shek Road
 Date of Formation: pre-1977
 Date of Construction/ Modification: 06-10-2006
 Approximate Coordinates: Easting : 843974 Northing : 824812

CONSEQUENCE-TO-LIFE CATEGORY

Facility at Crest: Undeveloped green belt
 Distance of Facility from Crest (m): 0
 Facility at Toe: Cottage, licensed and squatter area
 Distance of Facility from Toe (m): 0.5
 Consequence-to-life Category: 1
 Remarks: N/A

SLOPE PART

(1) Max. Height (m): 15 Length (m): 50 Average Angle (deg): 65

WALL PART

N/A

MAINTENANCE RESPONSIBILITY

Maintenance Type: Government Party: Lands D Agent: Lands D

DETAILS OF SLOPE / RETAINING WALL

Date of Inspection: 07-08-2017
 Data Source: EL(Lands D)
 Slope Part Drainage: (1) Position: Crest Size(mm): 225
 Wall Part Drainage: N/A

SLOPE PART

Slope Part (1)
 Surface Protection (%): Bare: 0 Vegetated: 80 Chunam: 0 Shotcrete: 20 Other Cover: 0
 Material Description: Material type: Soil Geology: N/A
 Berm: No. of Berms: N/A Min. Berm Width (m): N/A
 Weepholes: Size (mm): 75 Spacing (m): 1.5

WALL PART

N/A




SERVICES

N/A

PHOTO



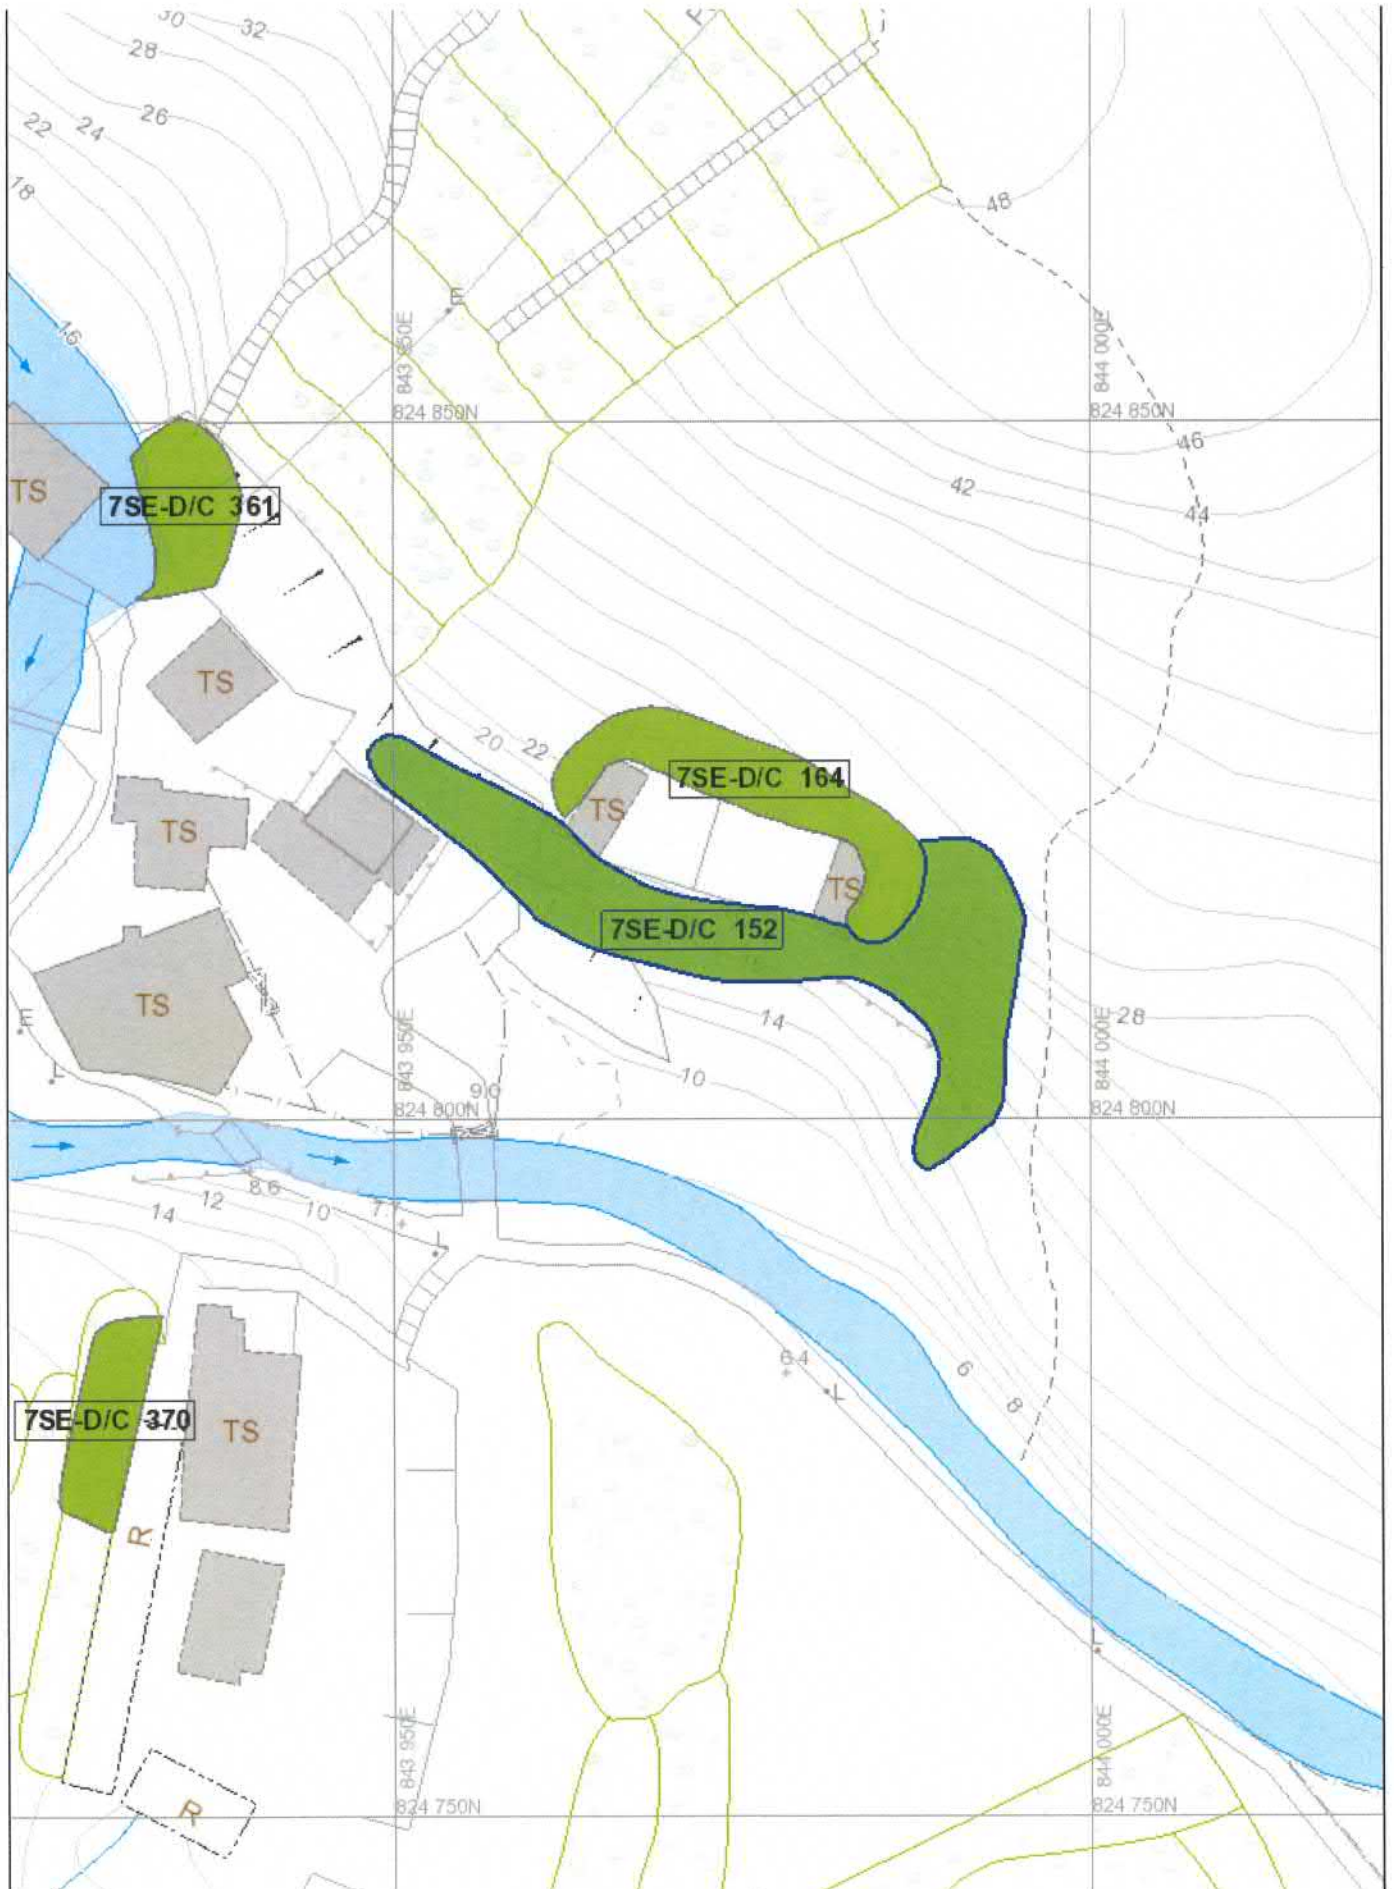



BASIC INFORMATION

Location: Adjacent Hing Keng Shek Road, Sai Kung
Date of Formation: pre-1977
Date of Construction/ Modification: N/A
Approximate Coordinates: Easting : 843975 Northing : 824825

CONSEQUENCE-TO-LIFE CATEGORY

Facility at Crest: Undeveloped green belt
Distance of Facility from Crest (m): 0
Facility at Toe: Remote area or abandoned facilities
Distance of Facility from Toe (m): 1
Consequence-to-life Category: 3
Remarks: N/A

SLOPE PART

(1) Max. Height (m): 6 Length (m): 31 Average Angle (deg): 55

WALL PART

N/A

MAINTENANCE RESPONSIBILITY

Maintenance Type: Government Party: Lands D Agent: Lands D

DETAILS OF SLOPE / RETAINING WALL

Date of Inspection: 13-08-2009
Data Source: EI(Lands D)
Slope Part Drainage: N/A
Wall Part Drainage: N/A

SLOPE PART

Slope Part (1)
Surface Protection (%): Bare: 0 Vegetated: 100 Chunam: 0 Shotcrete: 0 Other Cover: 0
Material Description: Material type: Soil & Rock Geology: N/A
Berm: No. of Berms: N/A Min. Berm Width (m): N/A
Weepholes: Size (mm): N/A Spacing (m): N/A

WALL PART

N/A



SERVICES

N/A

PHOTO





BASIC INFORMATION

Location: West of Hing Keng Shek Road, Sai Kung
 Date of Formation: post-1977
 Date of Construction/ Modification: 06-11-2006
 Approximate Coordinates: Easting : 844050 Northing : 824774

CONSEQUENCE-TO-LIFE CATEGORY

Facility at Crest: Undeveloped green belt
 Distance of Facility from Crest (m): 0
 Facility at Toe: Cottage, licensed and squatter area
 Distance of Facility from Toe (m): 0
 Consequence-to-life Category: 1
 Remarks: N/A

SLOPE PART

(1) Max. Height (m): 6.8 Length (m): 35 Average Angle (deg): 70

WALL PART

N/A

MAINTENANCE RESPONSIBILITY

Maintenance Type: Government Party: Lands D Agent: Lands D

DETAILS OF SLOPE / RETAINING WALL

Date of Inspection: 19-10-2017
 Data Source: EI(Lands D)
 Slope Part Drainage: (1) Position: Toe Size(mm): 300
 Wall Part Drainage: N/A

SLOPE PART

Slope Part (1)
 Surface Protection (%): Bare: 0 Vegetated: 0 Chunam: 0 Shotcrete: 0 Other Cover: 100
 Material Description: Material type: Soil Geology: N/A
 Berm: No. of Berms: 1 Min. Berm Width (m): 0.4
 Weepholes: Size (mm): 75 Spacing (m): 1.5

WALL PART

N/A



SERVICES

(1) Utilities Type: Water Main Size (mm): 20 Location: On slope Remark: N/A

PHOTO






Appendix B

Existing Boreholes Information

ENPACK (H.K.) LIMITED Civil Engineers & Contractors Asteris Building, 5th Floor, 34 Ashley Road Kowloon, Hong Kong Tel : 2376121 Fax : 2376882 ISO 9001 : 1994 Certificate No. PG00021		DRILLHOLE RECORD				HOLE NO. BH 8							
		CONTRACT NO. GE/99/06				SHEET 1 of 2							
PROJECT PWP Item 4273DS-Port Shelter Sewerage Stage 3 Phase 3, Ho Chung and Pik Shui Sun Tsuen Sewerage, Ground Investigation													
METHOD W+RC				CO-ORDINATES E 844,049.46 N 824,686.94		W.O. No GE/99/06.59							
MACHINE & No. DR 77						DATE: 17/11/2001 to 19/11/2001							
FLUSHING MEDIUM WATER				ORIENTATION VERTICAL		GROUND LEVEL +4.15 mPD							
Drilling Progress	Casing size	Water level (m) Shift start/end	T.C.R.(%)	S.C.R.(%)	R.Q.D.(%)	F.I.	Tests	Samples	Reduced Level	Depth (m)	Legend	Grade	Description
17.11.01	PX							1	0.50				Loose, light yellowish brown (10YR 8/4), silty fine to medium SAND with some angular to subangular fine to medium gravel sized rock fragments. (ALLUVIUM)
1								2	1.00				
2								3	1.50				
3								4	2.05	+2.10	-2.05		
4	PX		32				38blows	T2-101	3.00				Light grey (10R 7/1), angular to subangular fine to coarse GRAVEL sized moderately strong tuff fragments. (ALLUVIUM)
5	HX		51					T2-101	3.50	+0.65	3.50		Dark grey (5R 4/1), subangular fine to medium GRAVEL sized tuff fragments with a matrix of silty sand. (ALLUVIUM)
6			100					5	3.95	+0.05	4.10		Light grey, angular to subangular medium to coarse GRAVEL with much cobble and occasional boulder sized moderately strong to strong tuff fragments. (ALLUVIUM)
7	HX		41			NA		T2-101	4.85				Moderately strong, light grey to light yellowish brown, moderately decomposed coarse ash crystal TUFF. Joints are extremely closely occasionally very closely to closely spaced, rough, undulating and planar, extremely to very narrow, iron and manganese stained and clay infilled (<2-3mm), dipping at 60°-70° and subvertical.
17.11.01		1.20m at 18:00	98	21	13	>20		T2-101	6.05			III	Moderately strong to strong, grey, moderately to slightly decomposed coarse ash crystal TUFF. Joints are closely, locally extremely to very closely spaced, rough, undulating and planar, extremely narrow, iron and manganese stained, kaolin infilled (<2mm), dipping at 60°-70° and subvertical.
19.11.01		1.10m at 08:00	98	32	10	10.0		T2-101	7.35	-2.35	6.50	III/II	Moderately strong to strong, grey, moderately to slightly decomposed coarse ash crystal TUFF. Joints are closely, locally extremely to very closely spaced, rough, undulating and planar, extremely narrow, iron and manganese stained, kaolin infilled (<2mm), dipping at 60°-70° and subvertical.
8			100	80	47	>20		T2-101	8.10				
9			100	67	44	5.0		T2-101	9.45				From 8.90-9.45m : Non intact.
10						NI		T2-101	9.45	-5.30	8.45	II	Strong, grey to dark grey, slightly decomposed coarse ash crystal TUFF.
Small Disturbed Sample Piston Sample U76 Undisturbed Sample U100 Undisturbed Sample Mazier Sample SPT Limer Sample Water Sample Standard Penetration Test In-situ Vane Shear Test Permeability Test Impression Packer Test Packer Test Piezometer Tip Standpipe Tip								LOGGED P. Barry DATE 20/11/2001 CHECKED J. Morrison DATE 22/11/2001		REMARKS 1. Prior to drilling an inspection pit was excavated by hand to 1.50m depth.			


ENPACK (H.K.) LIMITED Civil Engineers & Contractors Astoria Building, 6th Floor, 34 Ashley Road Kowloon, Hong Kong Tel: (852) 21121 Fax: (852) 21122 ISO 9001:1994 Certificate No. PQ00021		DRILLHOLE RECORD				HOLE NO. BH 8							
		CONTRACT NO. GE/99/06				SHEET 2 of 2							
PROJECT PWP Item 4273DS-Port Shelter Sewerage Stage 3 Phase 3, Ho Chung and Pik Shui Sun Tsuen Sewerage, Ground Investigation													
METHOD W+RC				CO-ORDINATES E 844,049.46 N 824,688.94		W.O. No GE/99/06.59							
MACHINE & No. DR 77						DATE: 17/11/2001 to 19/11/2001							
FLUSHING MEDIUM WATER				ORIENTATION VERTICAL		GROUND LEVEL +4.15 mPD							
Drilling Progress	Casing size	Water level (m) Shift start/end	T.C.R.(%)	S.C.R.(%)	R.Q.D.(%)	F.I.	Tests	Samples	Reduced Level	Depth (m)	Legend	Grade	Description
10			100	100	77			T2-101					Joints are closely becoming medium spaced, planar, extremely narrow, kaolin coated and occasionally kaolin infilled (<2mm), dipping at 45°-55°, 60°-70° and subvertical. From 10.15-10.50m : Non intact.
11						NI 2.1		T2-101	10.95				
12			100	90	73			T2-101	12.45				
13			100	100	76			T2-101	13.90				
14		1.15m at 18:00	100	100	89			T2-101	14.80	14.80			
15													End of Investigation hole at 14.80m.
16													
17													
18													
19													
20													
Small Disturbed Sample Piston Sample U76 Undisturbed Sample U100 Undisturbed Sample Mazier Sample SPT Liner Sample Water Sample Standard Penetration Test In-situ Vane Shear Test Permeability Test Impression Packer Test Packer Test Piezometer Tip Standpipe Tip								LOGGED P. Barry DATE 20/11/2001 CHECKED J. Morrison DATE 22/11/2001		REMARKS			

 ENPACK (H.K.) LIMITED Civil Engineers & Contractors Assets Building, 9th Floor, 24 Anthony Road Shamshu, Hong Kong Tel : 23792121 Fax : 23792222 ISO 9001:1994 Certificate No. PQ00021		DRILLHOLE RECORD		HOLE NO. BH 9									
CONTRACT NO. GE/99/06				SHEET 1 of 2									
PROJECT PWP Item 4273DS-Port Shelter Sewerage Stage 3 Phase 3, Ho Chung and Pik Shui Sun Tsuen Sewerage, Ground Investigation													
METHOD W+RC		CO-ORDINATES E 844,072.77 N 824,663.34		W.O. No GE/99/06.59									
MACHINE & No. DR 77				DATE: 21/11/2001 to 22/11/2001									
FLUSHING MEDIUM WATER		ORIENTATION VERTICAL		GROUND LEVEL +4.06 mPD									
Drilling Progress	Casing size	Water level (m) Shift start/end	T.C.R. (%)	S.C.R. (%)	R.Q.D. (%)	F.I.	Tests	Samples	Reduced Level	Depth (m)	Legend	Grade	Description
21.11.01	PX												Soft to firm, yellowish brown (10YR 5/6) and light grey (10R 7/1), sandy SILT with some angular fine to coarse gravel sized weak to moderately strong tuff fragments. (FILL)
1								1 0.50 2 1.00 3 1.50					
2			0				20blows	4 1.90 5 2.00					
3			100				21blows	6 2.45 7 2.50	+1.06	3.00			
4							(1, 2, 3, 4, 4, 4) N = 15	8 2.95 9 3.10 10 3.40				V	Extremely weak, red (10R 5/8) mottled yellowish brown, completely decomposed coarse ash crystal TUFF. (Firm to stiff, slightly sandy clayey SILT with occasional angular fine to medium gravel sized rock fragments)
5								11 4.00					
6			100				(2, 2, 3, 5, 5, 6) N = 18	12 5.65 13 5.85 14 6.00	-1.94	6.00		V/IV	Extremely weak to weak, light yellowish brown (2.5Y 6/4), completely to highly decomposed coarse ash crystal TUFF. (Sandy angular fine to coarse GRAVEL sized weak rock fragments)
7	PX							15 6.90 16 7.00	-2.94	7.00			
8			95	30	0	>20		T2-101 7.50 T2-101 7.60	-3.94	8.00		III	Moderately strong, light yellowish brown, moderately decomposed highly micro fractured coarse ash crystal TUFF. Joints are extremely very closely spaced, rough, planar, extremely narrow, iron and manganese stained, dipping at 35°-45°, 60°-70° and subvertical.
9			100	100	50	8.8		T2-101 8.80				III/II	Moderately strong to strong, grey, moderately to slightly decomposed coarse ash crystal TUFF. Joints are very closely to closely spaced, rough, undulating and planar, extremely to very narrow, iron and manganese stained, kaolin infilled (<2-3mm), dipping at 35°-45°, 60°-70° and subvertical. From 8.80-9.10m : Extremely closely spaced joints.
10			100	85	38	6.7							
			95	73	37								
								LOGGED P. Barry DATE 23/11/2001 CHECKED J. Morrison DATE 01/12/2001		REMARKS 1. Prior to drilling an inspection pit was excavated by hand to 1.50m depth.			

ENPACK (H.K.) LIMITED Civil Engineers & Contractors America Building, 605 Room, 34 Ashley Road Kowloon, Hong Kong Tel: 23762131 Fax: 23760083		DRILLHOLE RECORD		HOLE NO. BH 9									
		CONTRACT NO. GE/99/06		SHEET 2 of 2									
PROJECT PWP Item 4273DS-Port Shelter Sewerage Stage 3 Phase 3, Ho Chung and Pik Shui Sun Tsuen Sewerage, Ground Investigation													
METHOD W+RC			CO-ORDINATES E 844,072.77 N 824,663.34		W.O. No GE/99/06.59								
MACHINE & No. DR 77					DATE: 21/11/2001 to 22/11/2001								
FLUSHING MEDIUM WATER			ORIENTATION VERTICAL		GROUND LEVEL +4.06 mPD								
Drilling Progress	Casing size	Water level (m) Shift start/end	T.C.R.(%)	S.C.R.(%)	R.Q.D.(%)	F.I.	Tests	Samples	Reduced Level	Depth (m)	Legend	Grade	Description
10								T2-101	10.30				As sheet 1 of 2.
11		0.30m at 18:00	100	91	53	1.7		T2-101	-8.94	11.00		II	From 10.30-10.40m : Non intact.
12		1.25m at 08:00	100	100	100			T2-101	11.45				Strong, grey to dark grey, slightly decomposed coarse ash crystal TUFF. Joints are closely to medium spaced, rough, planar, extremely narrow, chlorite coated, dipping at 35°-45°, 60°-70° and subvertical.
13			100	100	70			T2-101	12.85				
14			100	100	59	5.5		T2-101	14.35				
15			100	92	54			T2-101	15.80				
16		1.23m at 18:00						T2-101	17.10	-13.04	17.10		End of Investigation hole at 17.10m.
17													
18													
19													
20													
Small Disturbed Sample Piston Sample U76 Undisturbed Sample U100 Undisturbed Sample Mazier Sample SPT Liner Sample Water Sample Standard Penetration Test In-situ Vane Shear Test Permeability Test Impression Packer Test Packer Test Piezometer Tip Standpipe Tip								LOGGED P. Barry DATE 23/11/2001 CHECKED J. Morrison DATE 01/12/2001		REMARKS			

Appendix C

ENTLI and HLC from GInfo

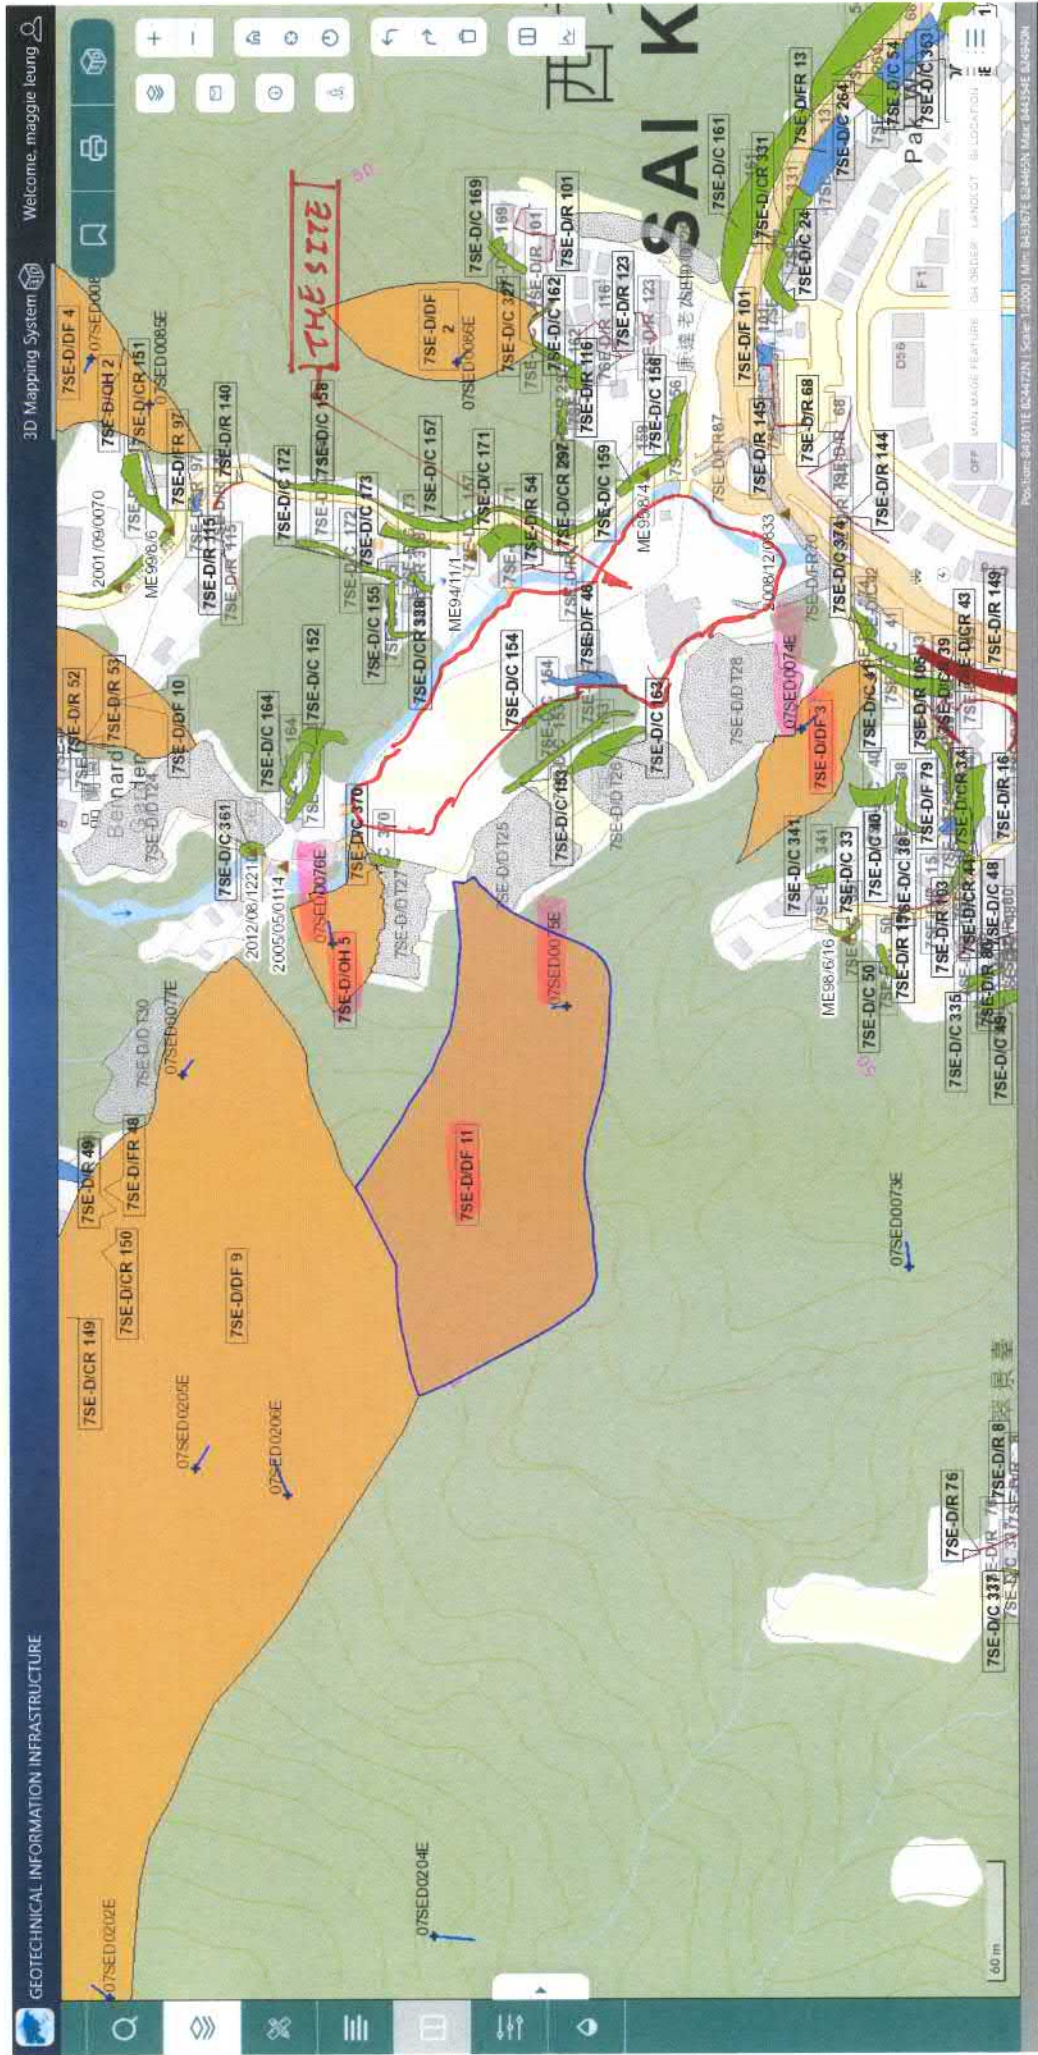

ENTLI & HLC

Historical Landslide Catchment

Name	Value
Catchment No.	7SE-D/DF 3
Plan area of the catchment (Sq. m)	2768.70312927
Maximum elevation difference (m)	40
The plan area of the catchment with gradient less than 15 degree (Sq. m)	194.443969406
Site visit for the catchment	Y
Total number of relict ENTLLI records within the catchment	1
Total number of recent ENTLLI records within the catchment	0
The length of the longest relict ENTLLI record within the catchment (m)	11.18
The length of the longest recent ENTLLI record within the catchment (m)	0
The length of the longest ENTLLI record within the catchment (m)	11.18
The total length of the all ENTLLI record within the catchment (m)	11

ENTLI Crown / Trail

Name	Value
ENTLI No.	07SED0074E
Slide ID	07SEDX0013
Type of slides	Relict
Action	A
Width of main scarp	9.5
Length of landslide source	11
Slope	45
Vegetation cover	Completely in grass
Year landslide first observed	1963
Elevation of landslide crown	32
Elevation of landslide toe	26
Elevation difference of landslide trail	6
Gully	N
Relict class	Depression related to drainage line (10% certain)
Easting	843994.155676
Northing	824571.578318

Historical Landslide Catchment

Name	Value
Catchment No.	7SE-D/DF 11
Plan area of the catchment (Sq. m)	19668
Maximum elevation difference (m)	75
The plan area of the catchment with gradient less than 15 degree (Sq. m)	0
Site visit for the catchment	Y
Total number of relict ENTLLI records within the catchment	1
Total number of recent ENTLLI records within the catchment	0
The length of the longest relict ENTLLI record within the catchment (m)	8
The length of the longest recent ENTLLI record within the catchment (m)	0
The length of the longest ENTLLI record within the catchment (m)	8
The total length of the all ENTLLI record within the catchment (m)	8

ENTLI Crown / Trail

Name	Value
ENTLI No.	07SED0075E
Slide ID	07SED0014
Type of slides	Relict
Action	A
Width of main scarp	14
Length of landslide source	7.5
Slope	39
Vegetation cover	Shrubs and trees
Year landslide first observed	1963
Elevation of landslide crown	57
Elevation of landslide toe	49
Elevation difference of landslide trail	8
Gully	N
Relict class	Broad depression (10% certain)
Easting	843857.473781
Northing	824688.2476

Historical Landslide Catchment

Name	Value
Catchment No.	7SE-D/OH 5
Plan area of the catchment (Sq. m)	2190.91106044
Maximum elevation difference (m)	51
The plan area of the catchment with gradient less than 15 degree (Sq. m)	0
Site visit for the catchment	Y
Total number of relict ENTLI records within the catchment	1
Total number of recent ENTLI records within the catchment	0
The length of the longest relict ENTLI record within the catchment (m)	11.69
The length of the longest recent ENTLI record within the catchment (m)	0
The length of the longest ENTLI record within the catchment (m)	11.69
The total length of the all ENTLI record within the catchment (m)	12



ENTLI Crown / Trail


Name	Value
ENTLI No.	07SED0076E
Slide ID	07SEDX0015
Type of slides	Relict
Action	A
Width of main scarp	16
Length of landslide source	11.5
Slope	47
Vegetation cover	Completely in grass
Year landslide first observed	1963
Elevation of landslide crown	36
Elevation of landslide toe	25
Elevation difference of landslide trail	11
Gully	N
Relict class	Broad depression (10% certain)
Easting	843888.557203
Northing	824804.065281

Appendix D

Geology Map from GInfo


[illegible]

Series HGM20
Scale 1:20 000

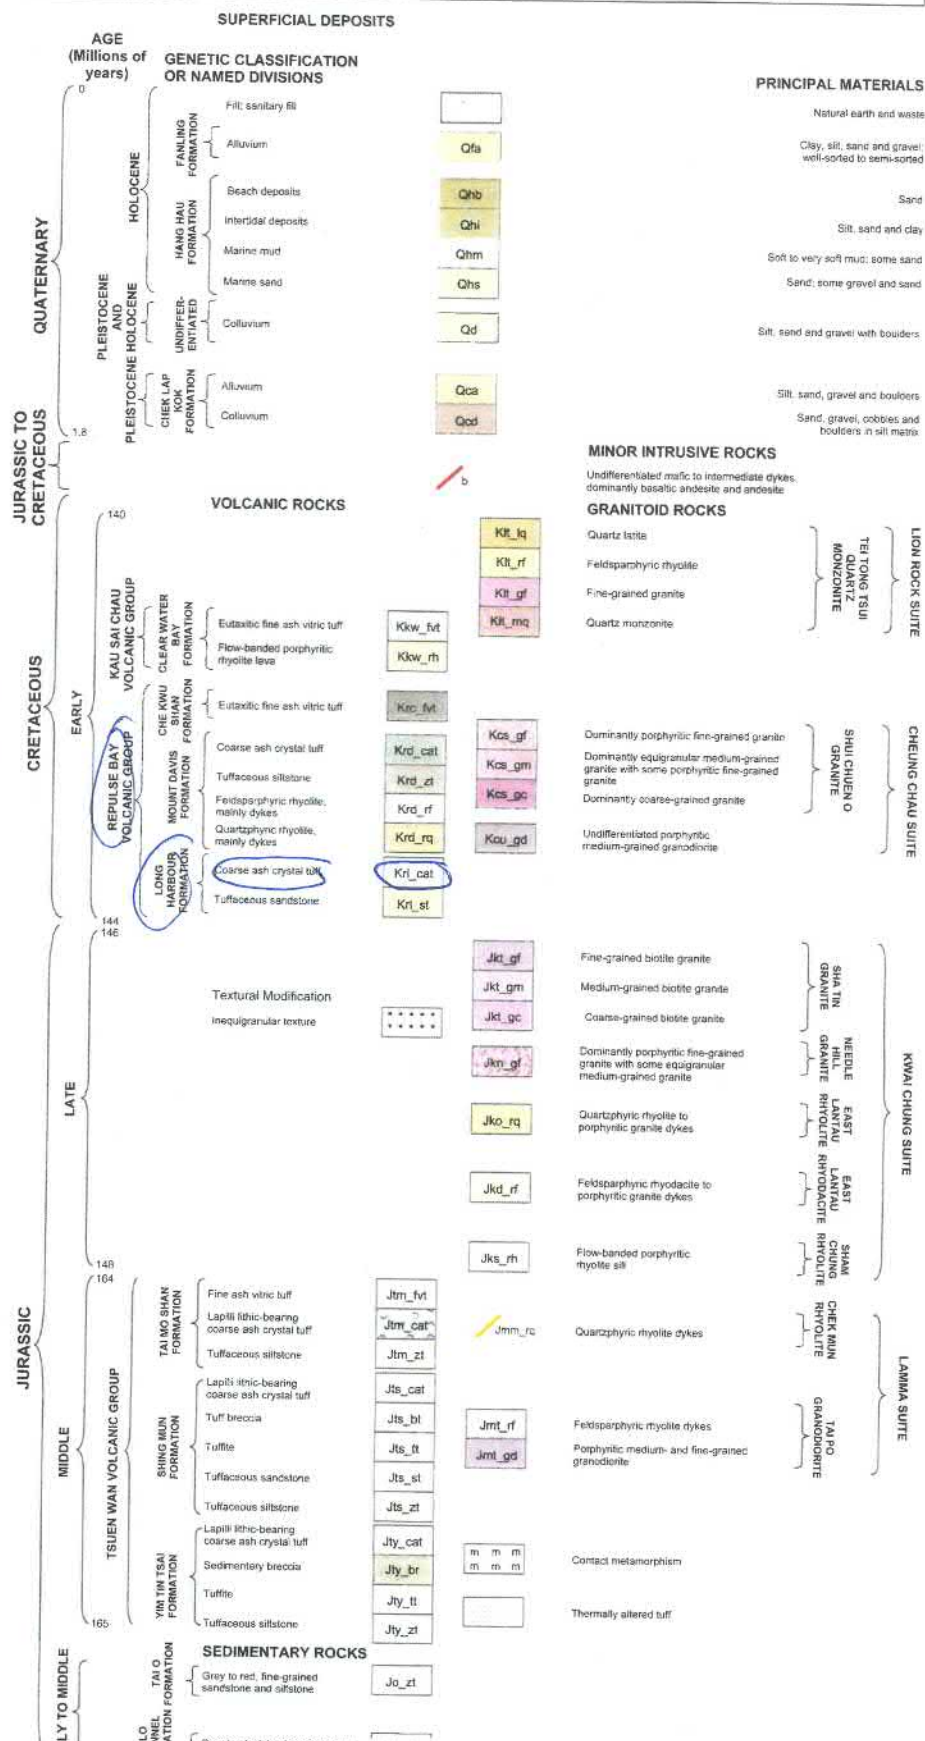



GEOLOGICAL MAP (2nd ED. AFTER 2008)

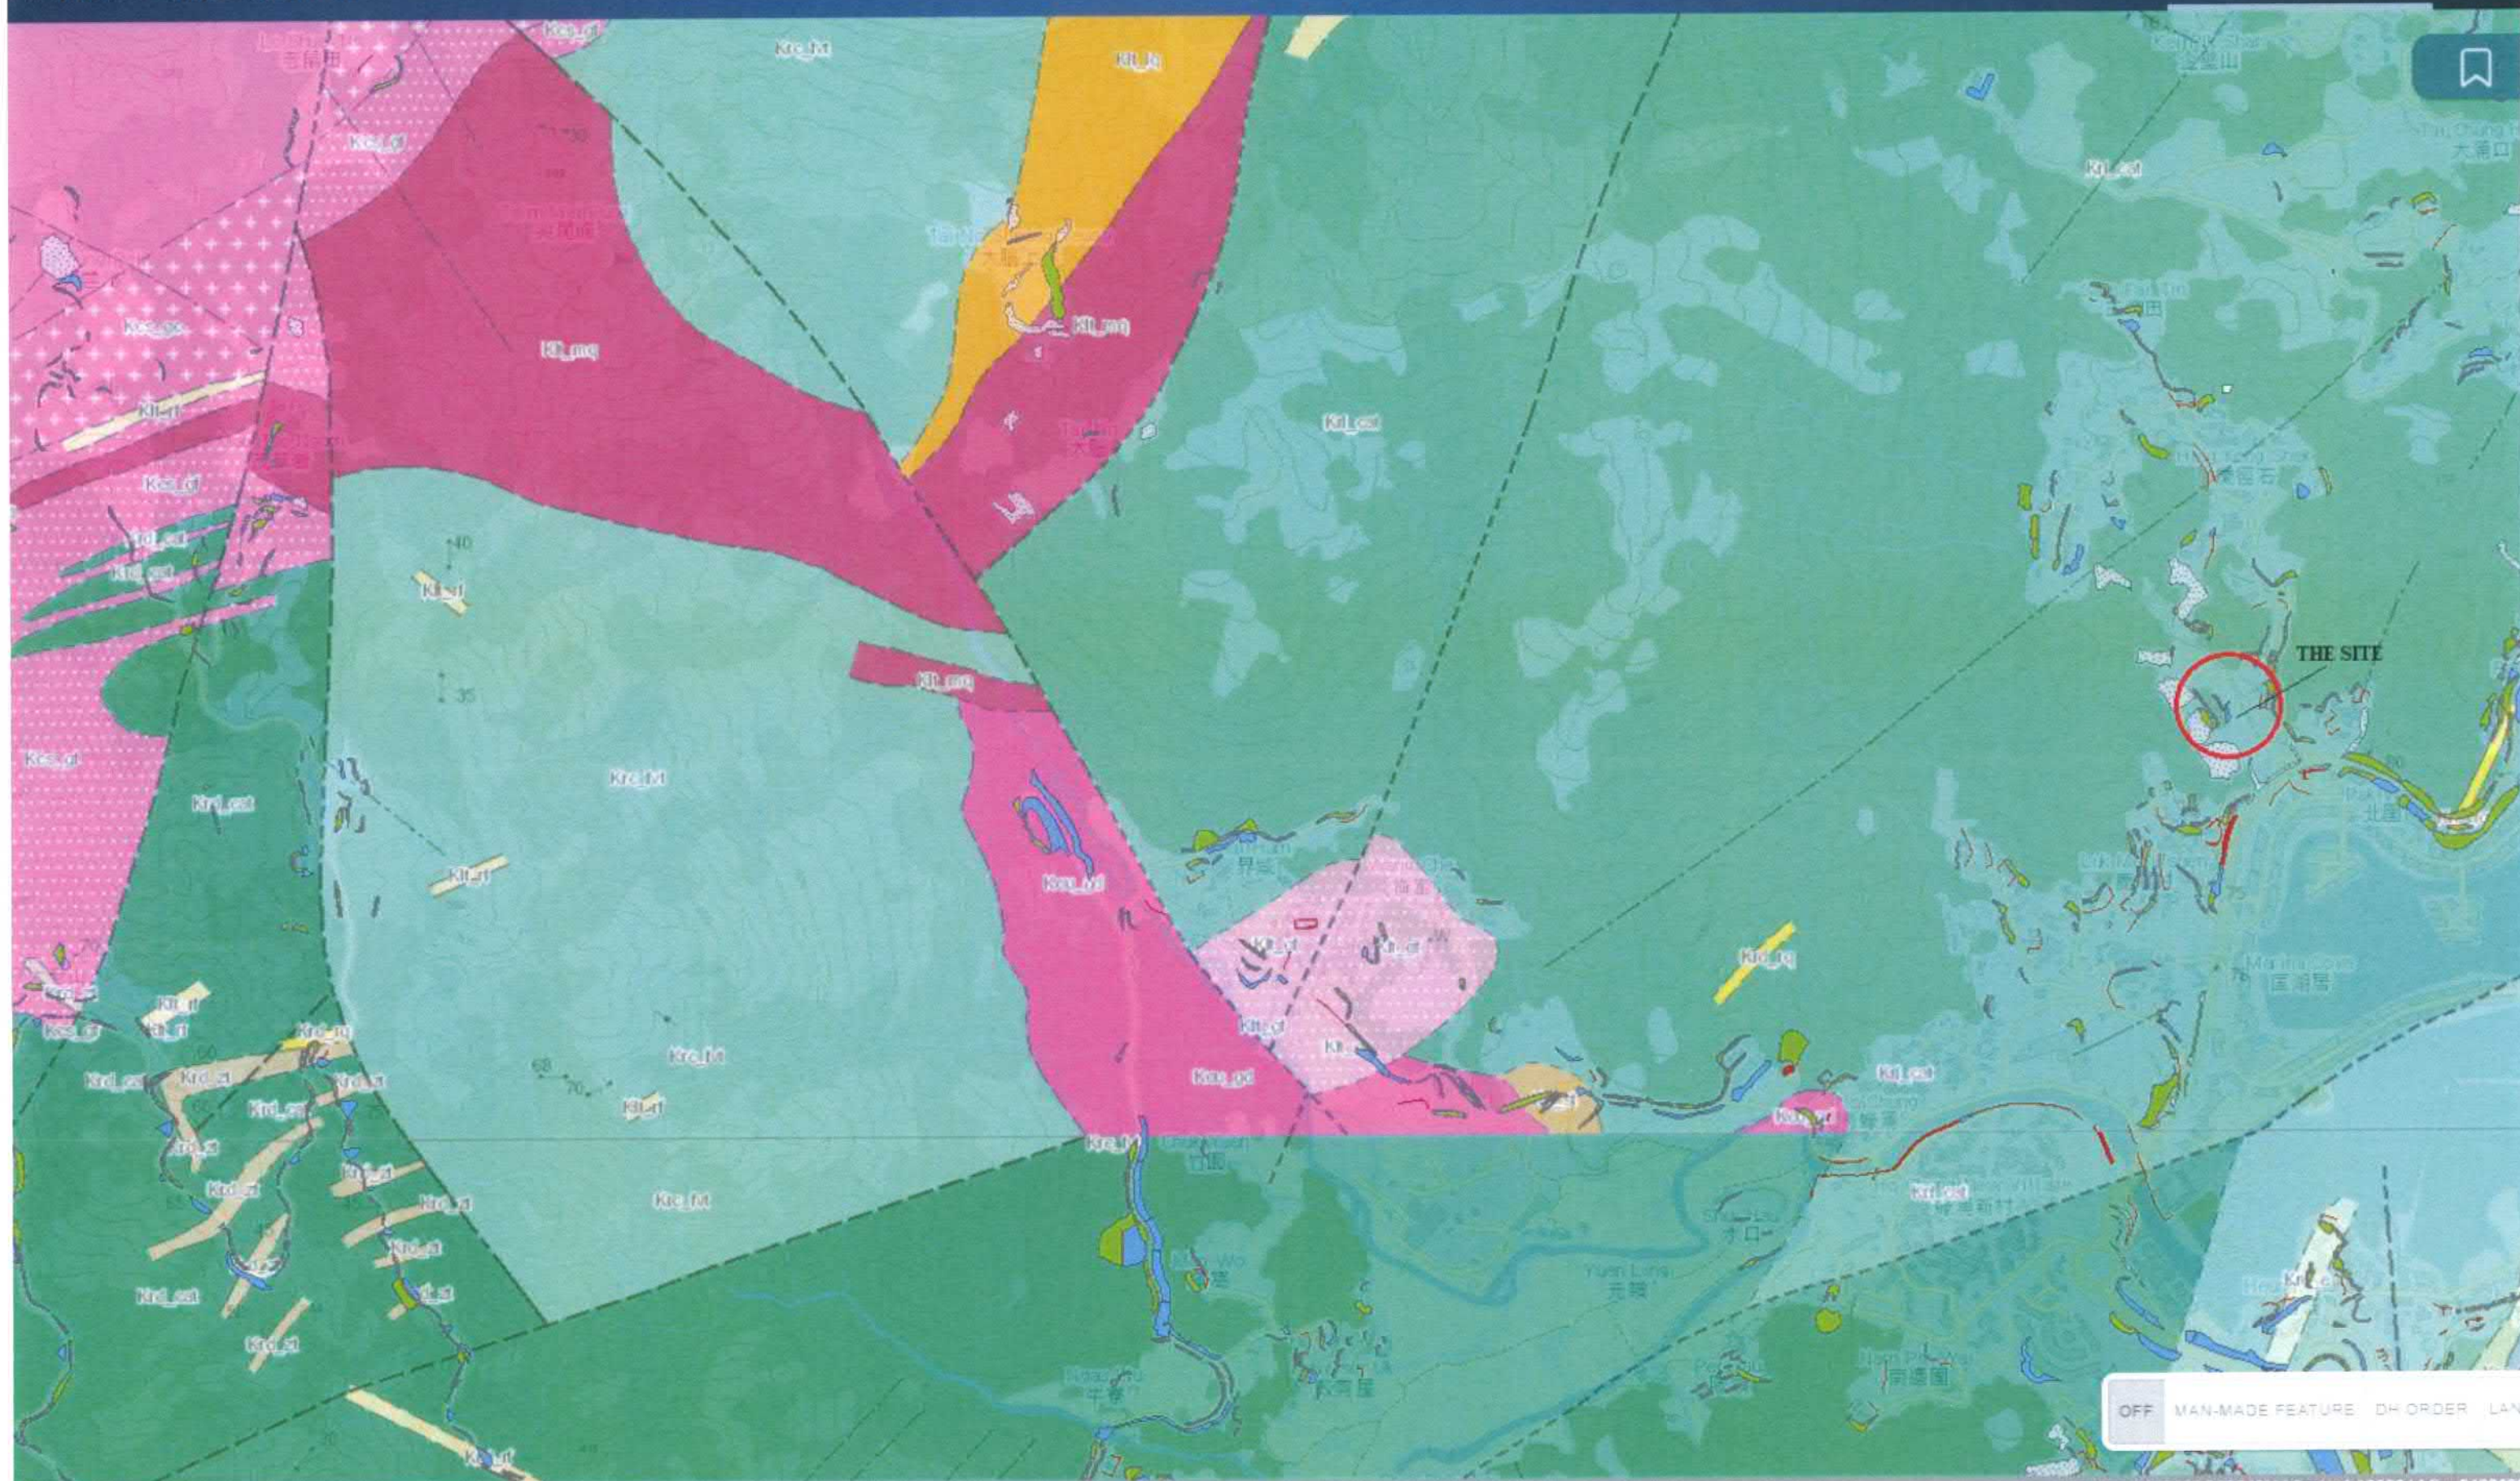

OFF MAN-MADE FEATURE DH ORDER LAND

Position: 842516E 823548N | Scale: 1:10000 | Min: 840069E

SOLID GEOLOGY

Appendix E

Summary of API

Summary of API

Year	Photographic Reference no.	Activities	Observations
1963	1963-9701 1963-9702	3900	The usage of land in the Site is farmland. Catchment A1 & A2 are also farmland. 3 nos. of Enhanced Natural Terrain Landslide Inventory (ENTLI) with Historical Landslide Catchment (HLC) are found from Ginfo.
1964	1964-4532	1800	The Site, Catchment A1 & A2 are farmland. Catchment B & C were fully covered by vegetation.
1968	1968-0898 1968-0899	2000	The Site, Catchment A2 are farmland. Catchment A1 was started to cover by vegetation/ trees and had been abandoned. Catchment B & C were fully covered by vegetation.
1974	09302	4000	The Site, Catchment A2 are farmland. Catchment A1, B & C were fully covered by vegetation. Catchment A2 was started to cover by vegetation/ trees and had been abandoned
1977	20026	4000	The Site is farmland. Catchments under study were fully covered by vegetation.
1978	23149	4000	The Site is farmland Catchments under study were fully covered by vegetation.
1979	25705	2500	The Site is farmland Catchments under study were fully covered by vegetation.
1980	29666	4000	The Site is farmland Catchments under study were fully covered by vegetation.
1982	43262	4000	The Site is farmland Catchments under study were fully covered by vegetation.

Year	Photographic Reference no.	Activities	Observations
1983	50643	4000	Middle part was farmland and other parts of the Site was started to cover by vegetation/ trees Catchments under study were fully covered by vegetation.
1984	55367	4000	Middle part of the Site was farmland. Other parts of the Site and Catchments under study were fully covered by vegetation.
1986	A05256	4000	Middle part of the Site was farmland. Other parts of the Site and Catchments under study were fully covered by vegetation.
1987	A08855	4000	Middle part of the Site was farmland. Other parts of the Site and Catchments under study were fully covered by vegetation.
1988	A15444	4000	Middle part of the Site was farmland. Other parts of the Site and Catchments under study were fully covered by vegetation.
1989	A17757	4000	Middle part of the Site was farmland. Other parts of the Site and Catchments under study were fully covered by vegetation.
1990	A21734	2000	Middle part of the Site was started to cover by vegetation/ trees. Other parts of the Site and Catchments under study were fully covered by vegetation.
1991	A29309	3000	The Site and Catchments under study were fully covered by vegetation.
1993	CN03209	4000	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
1994	CN06606	3300	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
1995	CN10978	2500	Some squatters found in the Site. Catchments under study were fully covered by vegetation.

Year	Photographic Reference no.	Activities	Observations
1996	CN15116	3500	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
1997	CN16771	4000	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
1998	CN21228	4000	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
1999	CN23114	2500	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2000	CN26681	4000	Public works (Port Shelter Sewerage Stage 3, Ph. 3 – GE/99/06) was commenced in the middle of the Site. Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2001	CW32429	4000	GI for Public works GE/99/06 was commenced in the middle of the Site Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2002	CW38786	3000	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2003	CW52903	4000	New Road (Hing Keng Shek Road) beside the Site is formed Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2004	CW52903	4000	Some squatters found in the Site. Catchments under study were fully covered by vegetation.

Year	Photographic Reference no.	Activities	Observations
2005	CW63913 CW64565	2500	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2006	CW52903	4000	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2007	CS09320	4000	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2008	CS22404	6000	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2009	CS24367	6000	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2010	CS29288	6000	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2011	CS35169	6000	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2012	CS39288	6000	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2013	CS45139	6000	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2014	CS48747 CS48748	6000	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2015	CS57777	6000	Some squatters found in the Site. Catchments under study were fully covered by vegetation.

Year	Photographic Reference no.	Activities	Observations
2016	CS64065	6000	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2019	E068813C	6900	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2020	E097551C	6900	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2021	E129664C	6900	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2022	E181548C	3000	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2023	E194258C	6900	Some squatters found in the Site. Catchments under study were fully covered by vegetation.
2024	E233512C E233513C	6900	Latest Aerial Photos Some squatters found in the Site. Catchments under study were fully covered by vegetation. No New ENTLI, HLC & Landslide Incident was found from GInfo in Catchments under study



地政總署測繪處

Year: 1963
Photo No.: 1963-9702

Catchment A2

The Site (as farmland)

ENTLI: 07SED0074E


Catchment A1

ENTLI: 07SED0076E

Catchment C

ENTLI: 07SED0075E

Catchment B

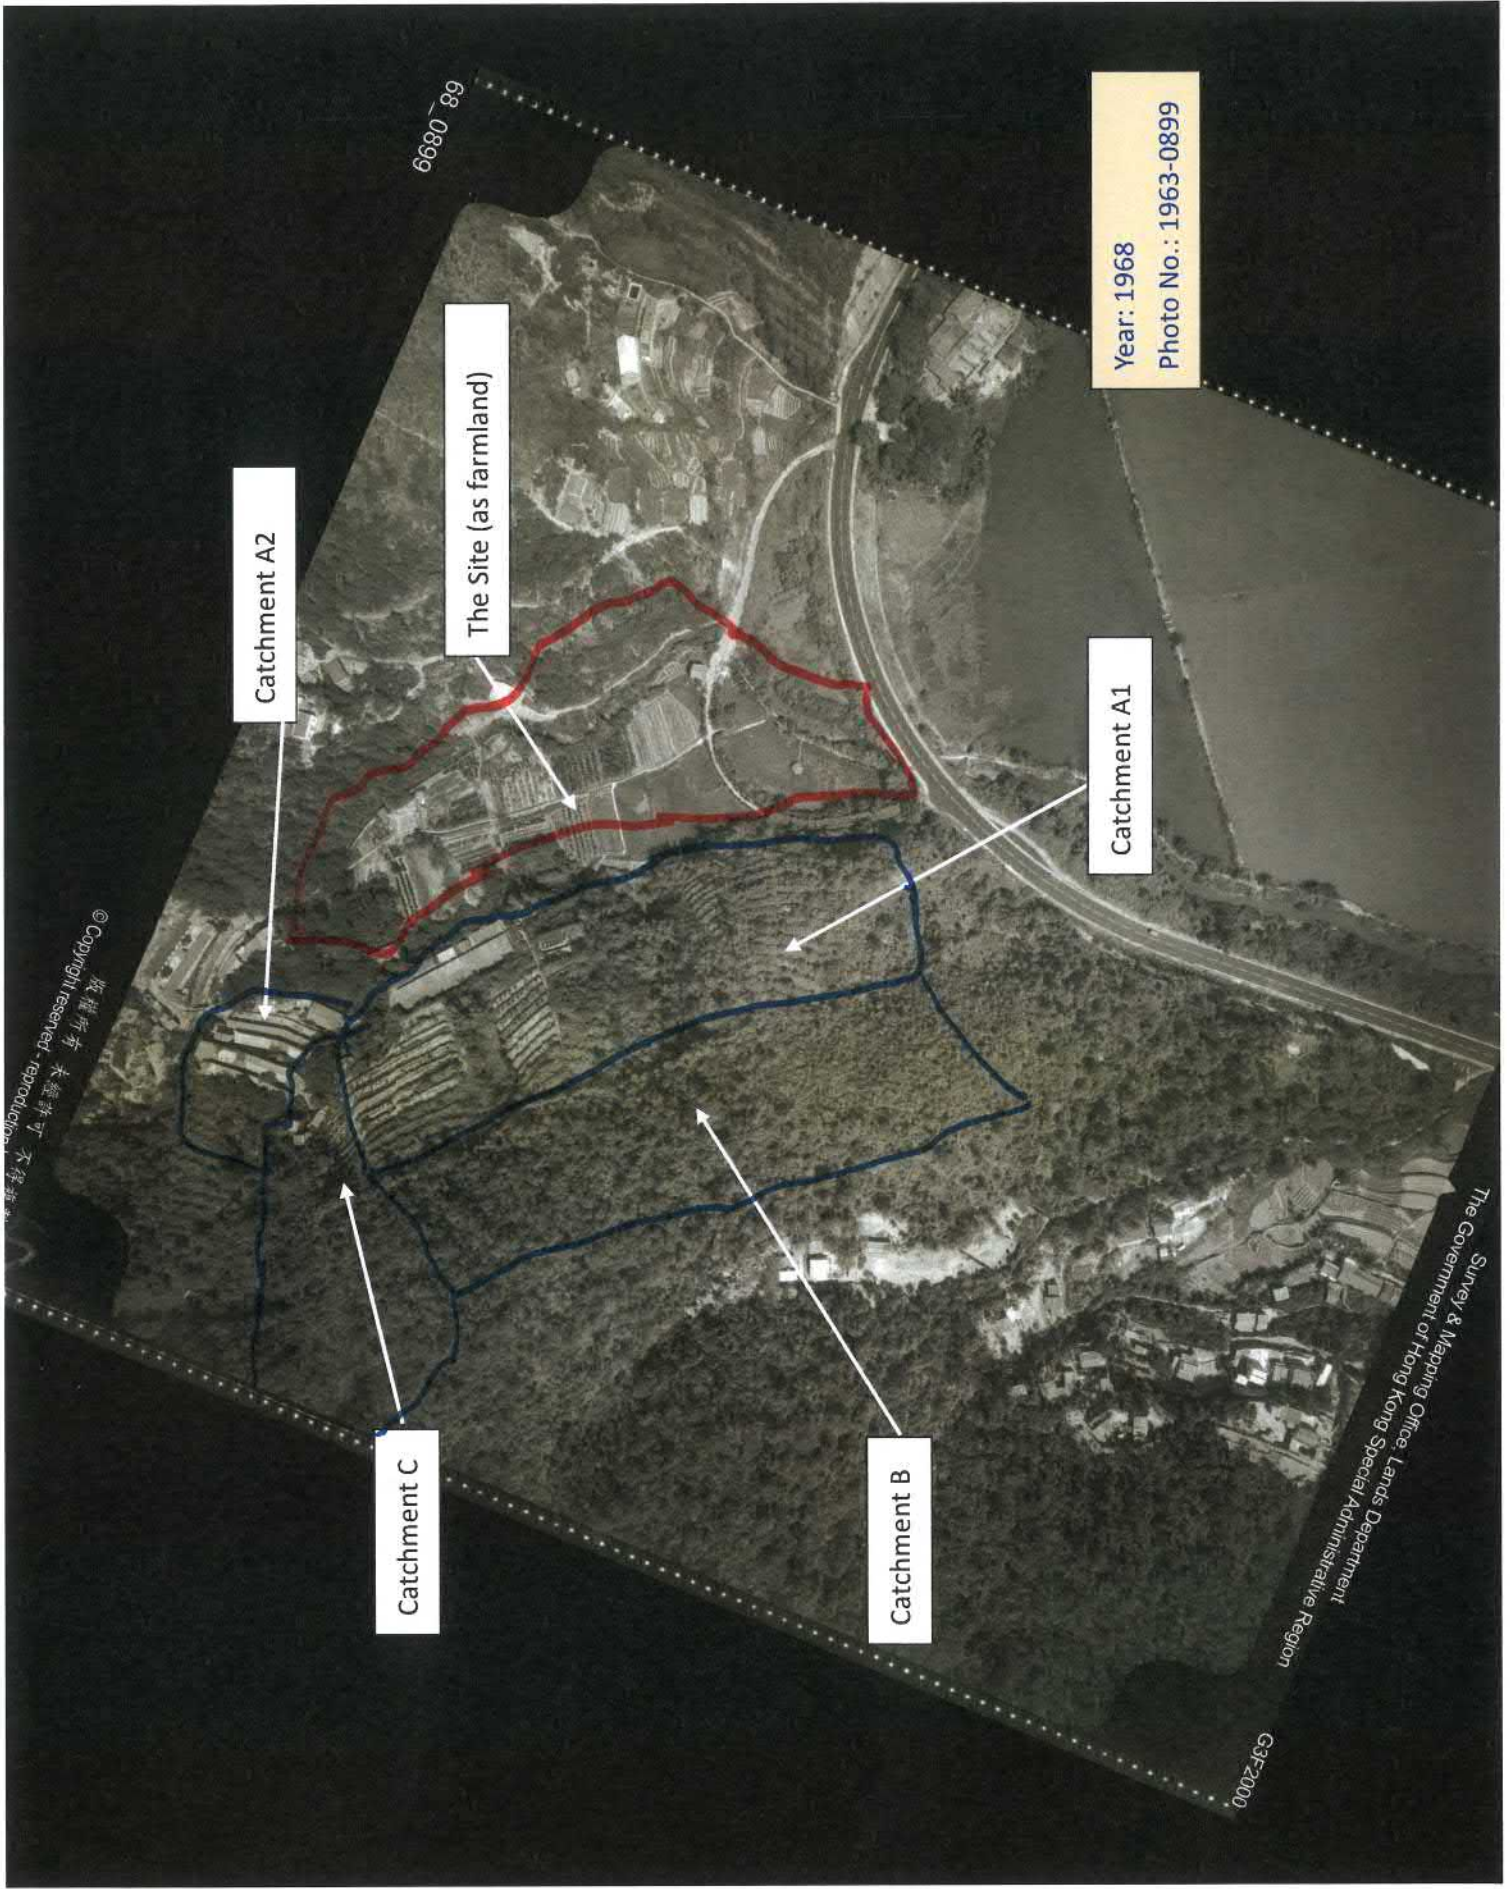

6680 89

Year: 1968

Photo No.: 1963-0899

Catchment A2

The Site (as farmland)

Catchment A1


Catchment C

Catchment B

Survey & Mapping Office, Lands Department
The Government of Hong Kong Special Administrative Region

G3F-2000

© Copyright reserved. 版權所有，未經許可，不得翻印。
Reproduction prohibited without permission.

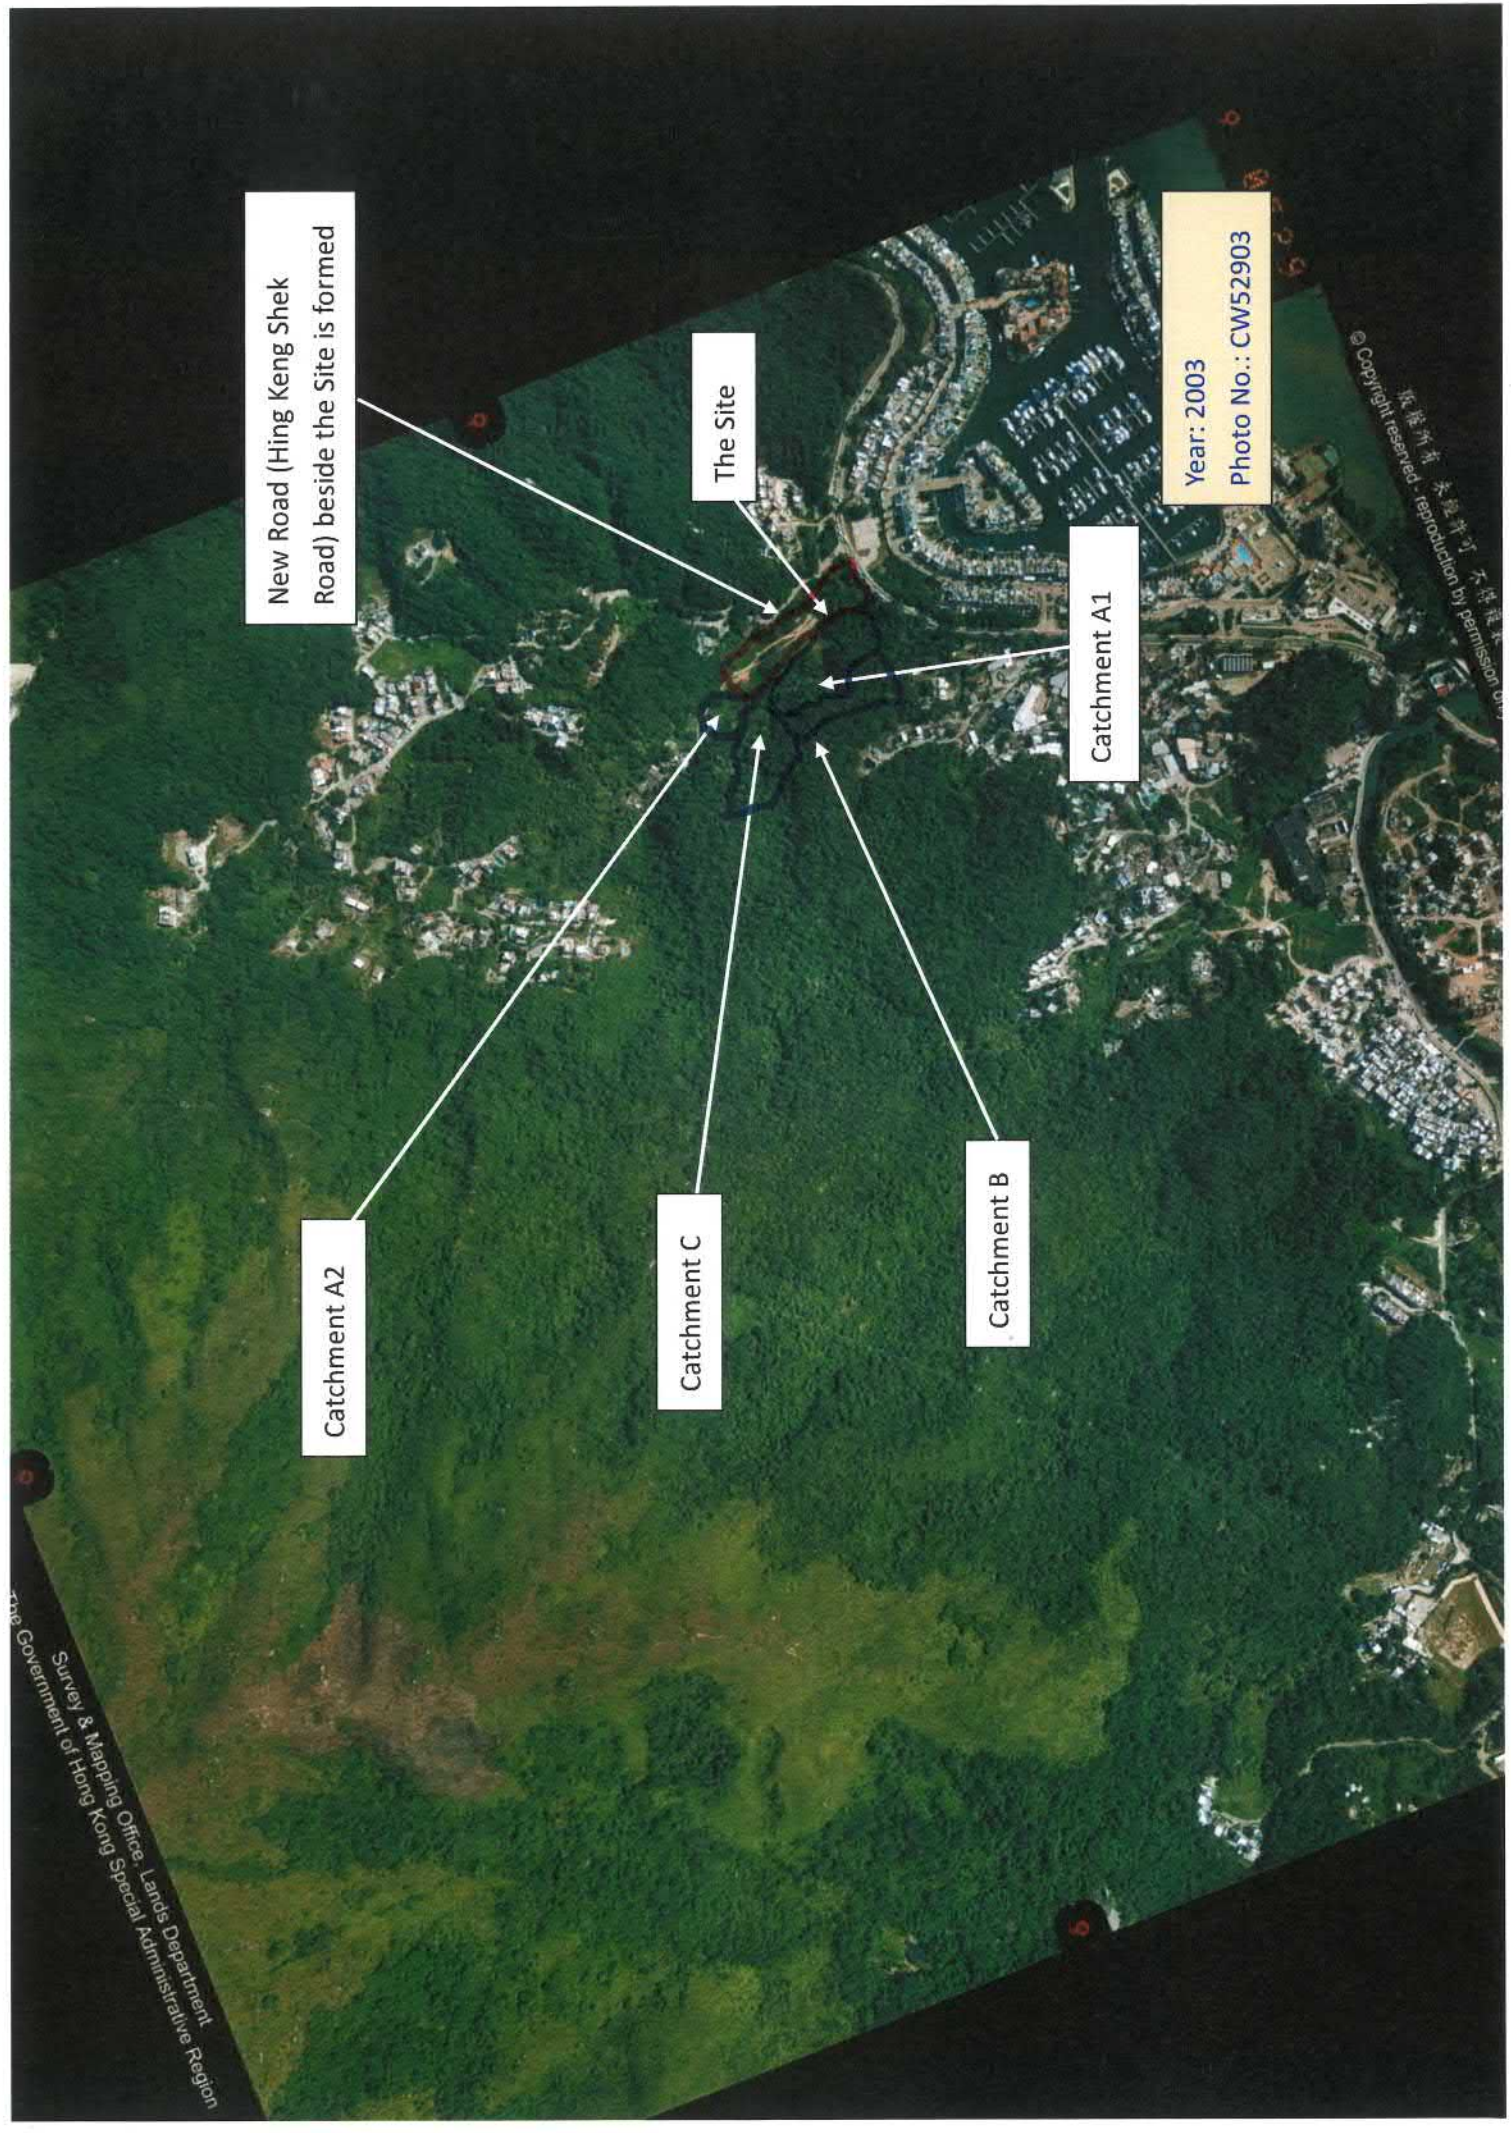

New Road (Hing Keng Shek Road) beside the Site is formed

The Site


Year: 2003
Photo No.: CW52903

Catchment A1

Catchment B

Catchment C

Catchment A2

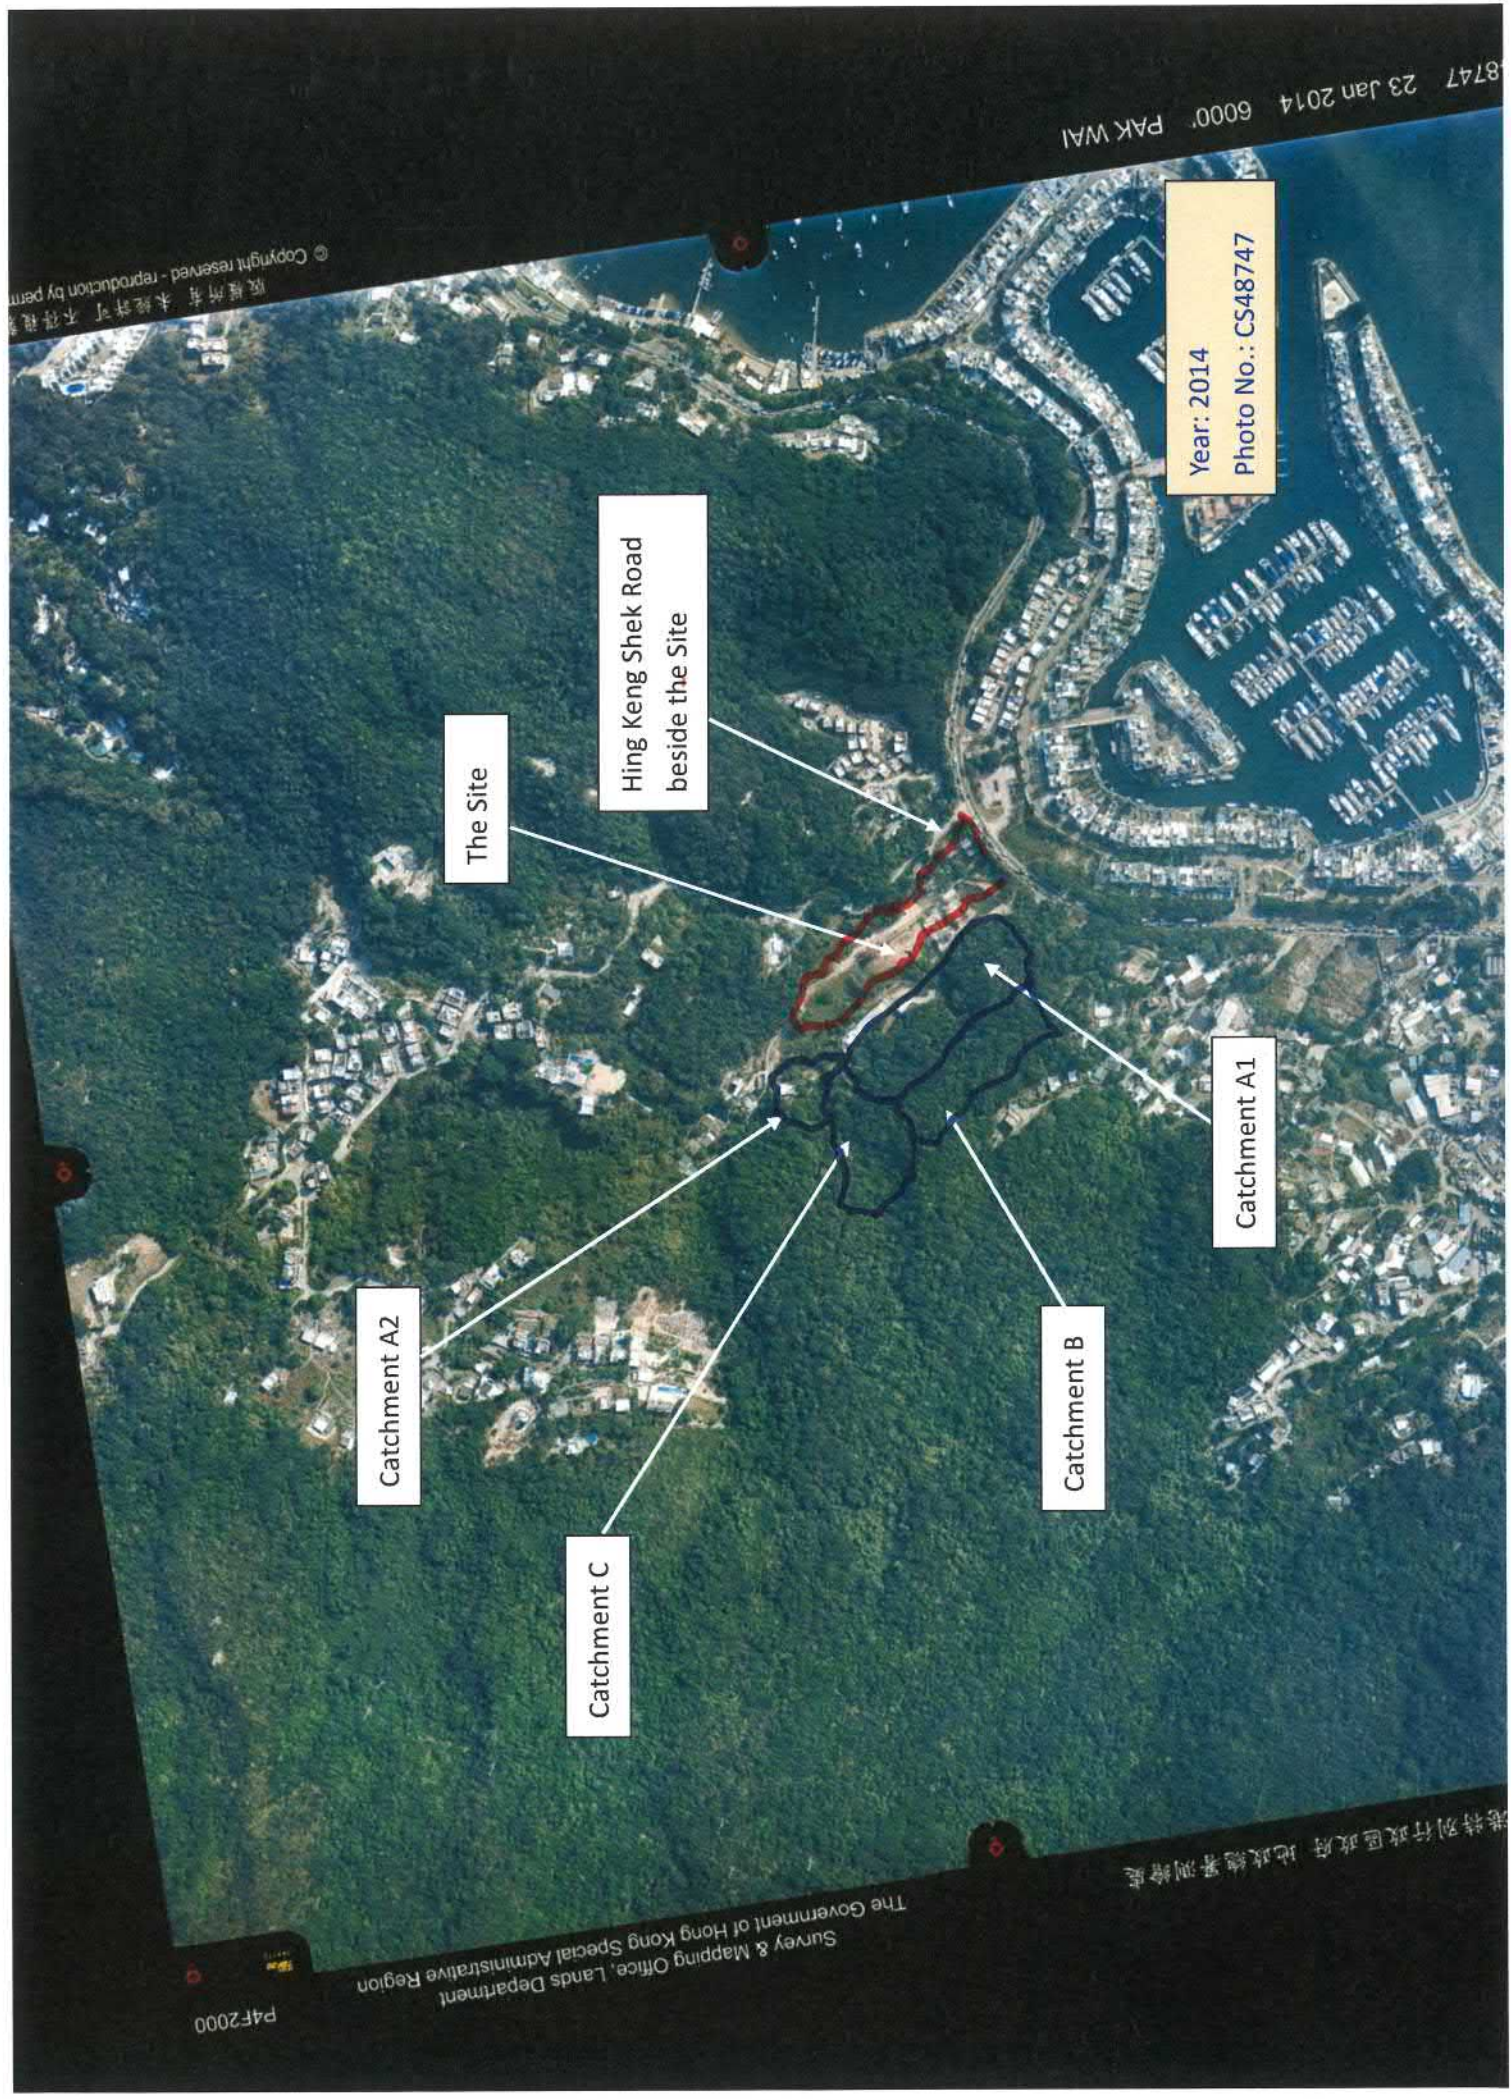

© Copyright reserved - reproduction by permission

8747 23 Jan 2014 6000' PAK WAI

Year: 2014
Photo No.: CS48747

The Site

Hing Keng Shek Road
beside the Site

Catchment A1


Catchment B

Catchment C

Catchment A2

P4F2000
Survey & Mapping Office, Lands Department
The Government of Hong Kong Special Administrative Region

港特別行政區政府 地政總署測繪處

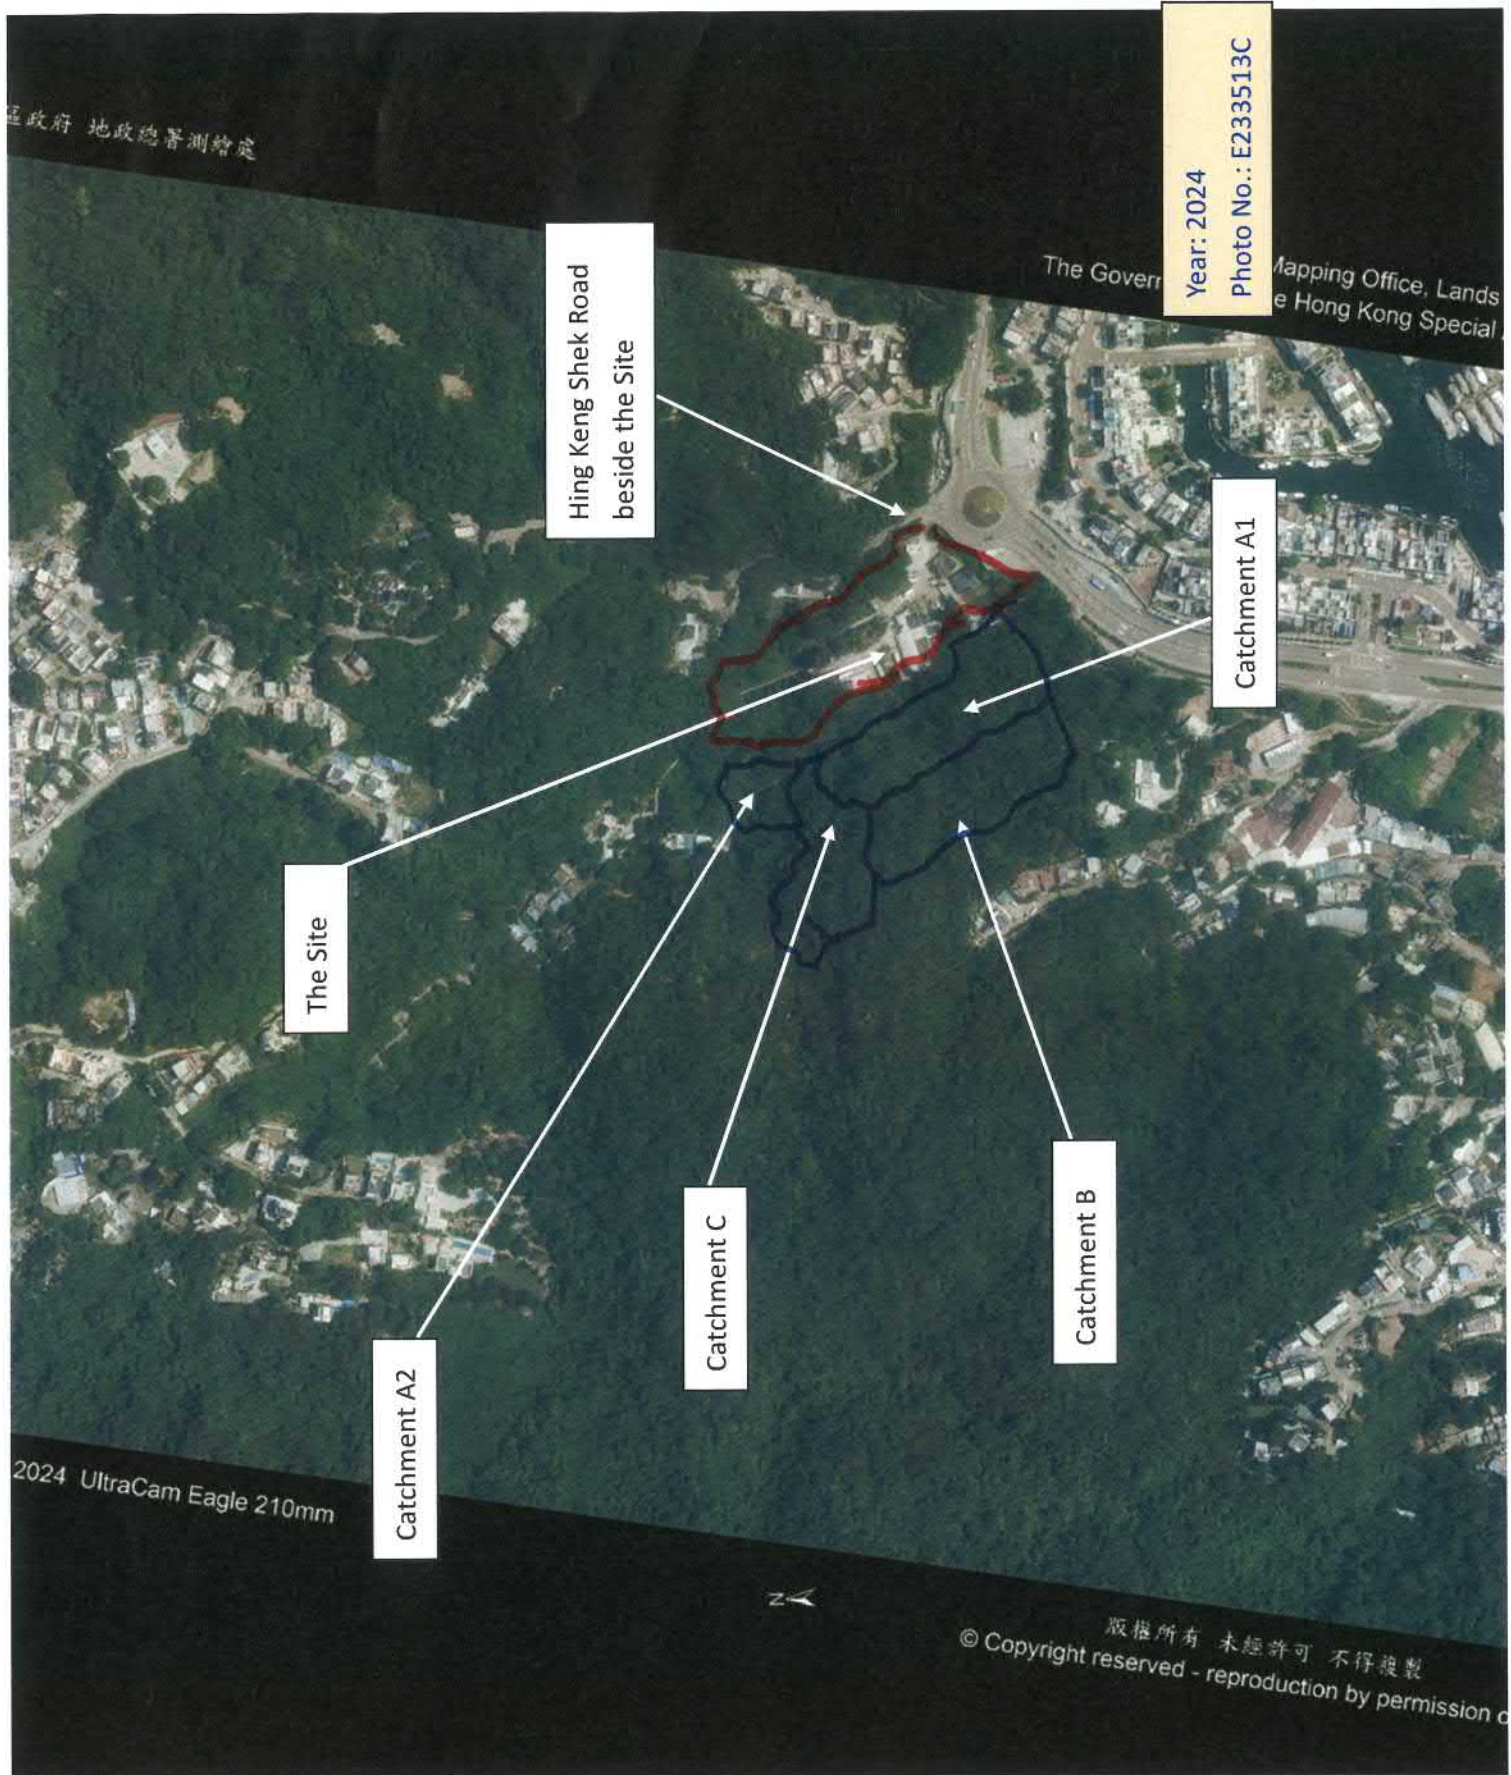

區政府 地政總署測繪處

Year: 2024
Photo No.: E233513C

The Government Mapping Office, Lands
Department, Hong Kong Special

Hing Keng Shek Road
beside the Site

Catchment A1

The Site

Catchment C

Catchment B

Catchment A2

2024 UltraCam Eagle 210mm



版權所有 未經許可 不得複製
© Copyright reserved - reproduction by permission of